


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1670617~620	2016/07/12	Vicky	Update Logo & Note

F
E
D
C
B
A

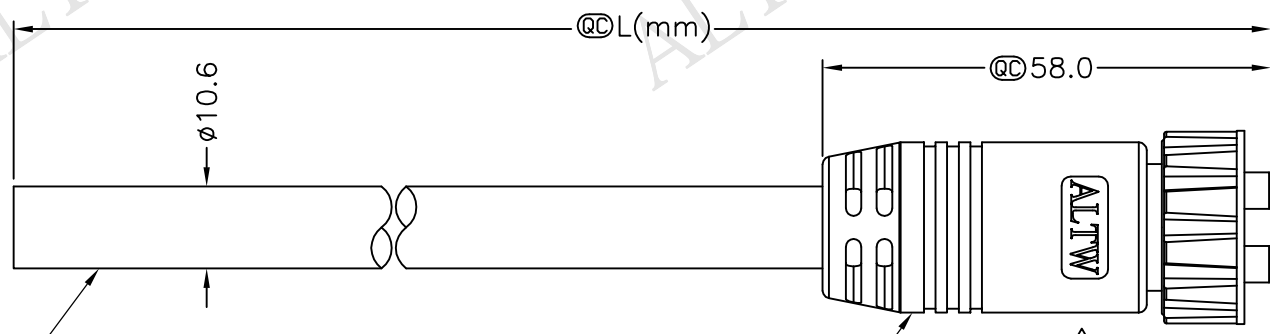


Cable ②

MN-04AFFM-SL8000 ①
Color: Black



- Note:
- * \textcircled{Q} Important Dimension
 - * Waterproof Rate: IP68
In 1 meter water within 24 hours
 - * Housing: Polyurethane, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * \textcircled{A} O-ring: Viton, Green
 - * Nut: Zinc Alloy, Nickel Plated
 - * Cable: Stoow 16AWG*4C, PVC Jacket, Black, OD=10.6mm
 - * \textcircled{A} Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

MN-04AFFM-SL8DXX
 XX:01~99Meters
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters



Pin Assignments
Front View

4	White	白
3	Black	黑
2	Red	紅
1	Green	綠
Conn.	Wire Color	Pin Out

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE NMEA Mini Conn Cable Screw 4Pin F Conn F Pin	
SCALE Free	SHEET 1 OF 1
REV. B	SIZE A4
\textcircled{Q} : Inspection Item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO MN-04AFFM-SL8DXX
CUSTOMER ALTW	

DRAWN BY Vicky	DATE 2016/07/12
CHECKED BY Rita	DATE 2016/07/12
APPROVED BY Lisa	DATE 2016/07/12

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.