


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2011/11/14	Tao-Cheng	Change Rev.02 To Rev.A
B	LEN1480259~262	2014/07/03	Sam	Change Logo
C	LEN1750044~047	2017/05/03	Ruru	Modify Note

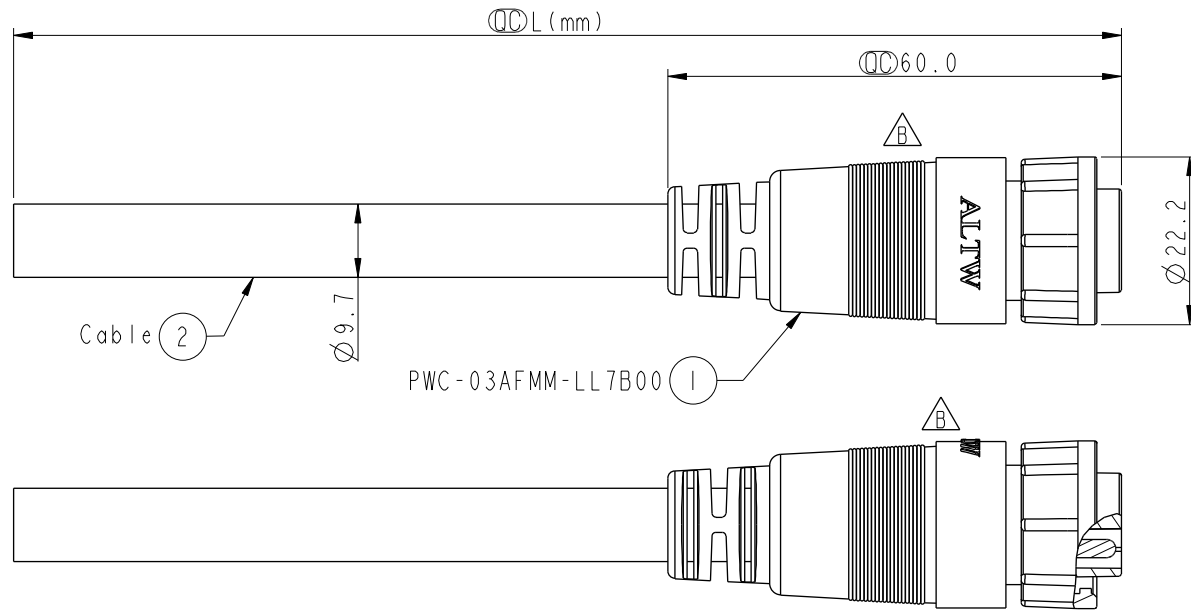

PWC-03AFMM-LL7B00


PWC-03AFMM-LL7BXX

XX: 01~99Meters
 01: 01Meter
 02: 02Meters
 ...
 99: 99Meters

Cable Length(L): 01~99Meters

Note:

- * CC Important Dimension.
- * Waterproof Rate: IP67 (Mated).
- * Connector: Nylon+GF, Black.
- * \triangle Male Pin: Copper Alloy, Gold Plated.
- * O-Ring: Silicone, Gray.
- * Lock Nut: Nylon+GF, Black.
- * Cable: TC-ER 14AWG*3C, Black, PVC Jacket, OD=9.7mm.
- * Cable Length Tolerance:
 - 01M: ±40mm
 - 02M~05M: ±60mm
 - 06M~10M: ±100mm
 - 11M~30M: ±200mm
 - 31M~99M: ±500mm



Pin Assignments
Front View 前視圖

Conn.	Wire Color	Pin Out
3	White 白	
2	Green 綠	
1	Black 黑	

UNIT:mm TOLERANCE ±0.5 mm	TITLE Power Molding F Conn. M Pin 20Amps			Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO	DRAWN BY	DATE
	SCALE	SIZE	SHEET			OF	DWG NO	CHECKED BY
	REV.	WC-REV.	CC : Inspection item		CUSTOMER	APPROVED BY	DATE	