


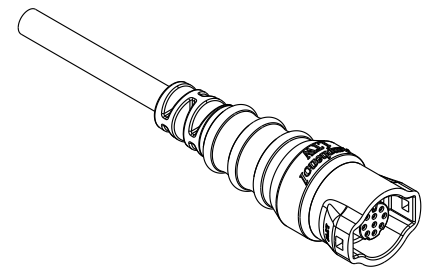
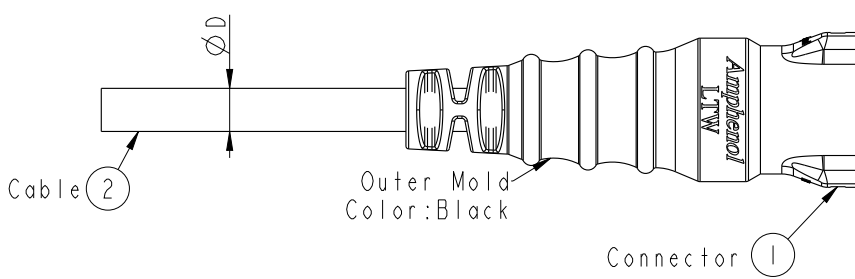
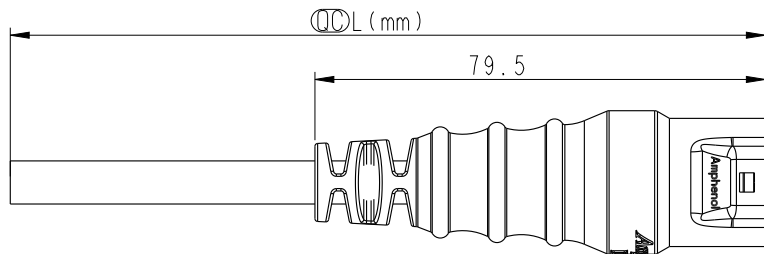


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION

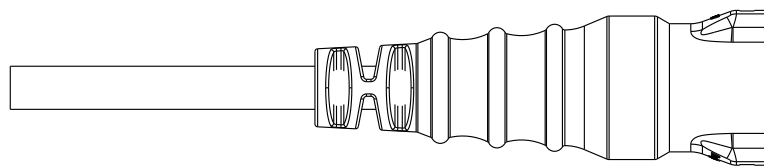

Conn




- Note:
- * D Important Dimension To Check.
 - * Waterproof Rate: IP68
 - * Housing: 2~6Pin M-PPE, Black.
7~9Pin Nylon+GF, Black.
 - * Female Pin: Copper Alloy, Gold Plated.
 - * Cable: UL21388 20#, PVC Jacket UV Resistant, Black.
 - * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm
 - * Prohibiting the use of place in oils

CD-02AFFM-RL8DXX	∅ 5.5
CD-03AFFM-RL8DXX	
CD-04AFFM-RL8DXX	∅ 6.0
CD-05AFFM-RL8DXX	∅ 6.2
CD-06AFFM-RL8DXX	∅ 6.8
CD-07AFFM-RL8DXX	
CD-08AFFM-RL8DXX	∅ 7.2
CD-09AFFM-RL8DXX	∅ 7.6
Part No.	Cable OD

UNIT: mm			TITLE MIDDLE RBL F CONN F PIN CABLE		
TOLERANCE	±0.5		SCALE 3:4	SIZE A4	SHEET 1 OF 2
REV. A	WC-REV. A.1	D : Inspection item	Amphenol LTW 安費諾亮泰企業股份有限公司		

ITEM NO.	DRAWN BY Peng	DATE 2019-03-30
DWG NO. CD-XXAFFM-RL8DXX	CHECKED BY Mafei	DATE 2019-03-30
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2019-03-30

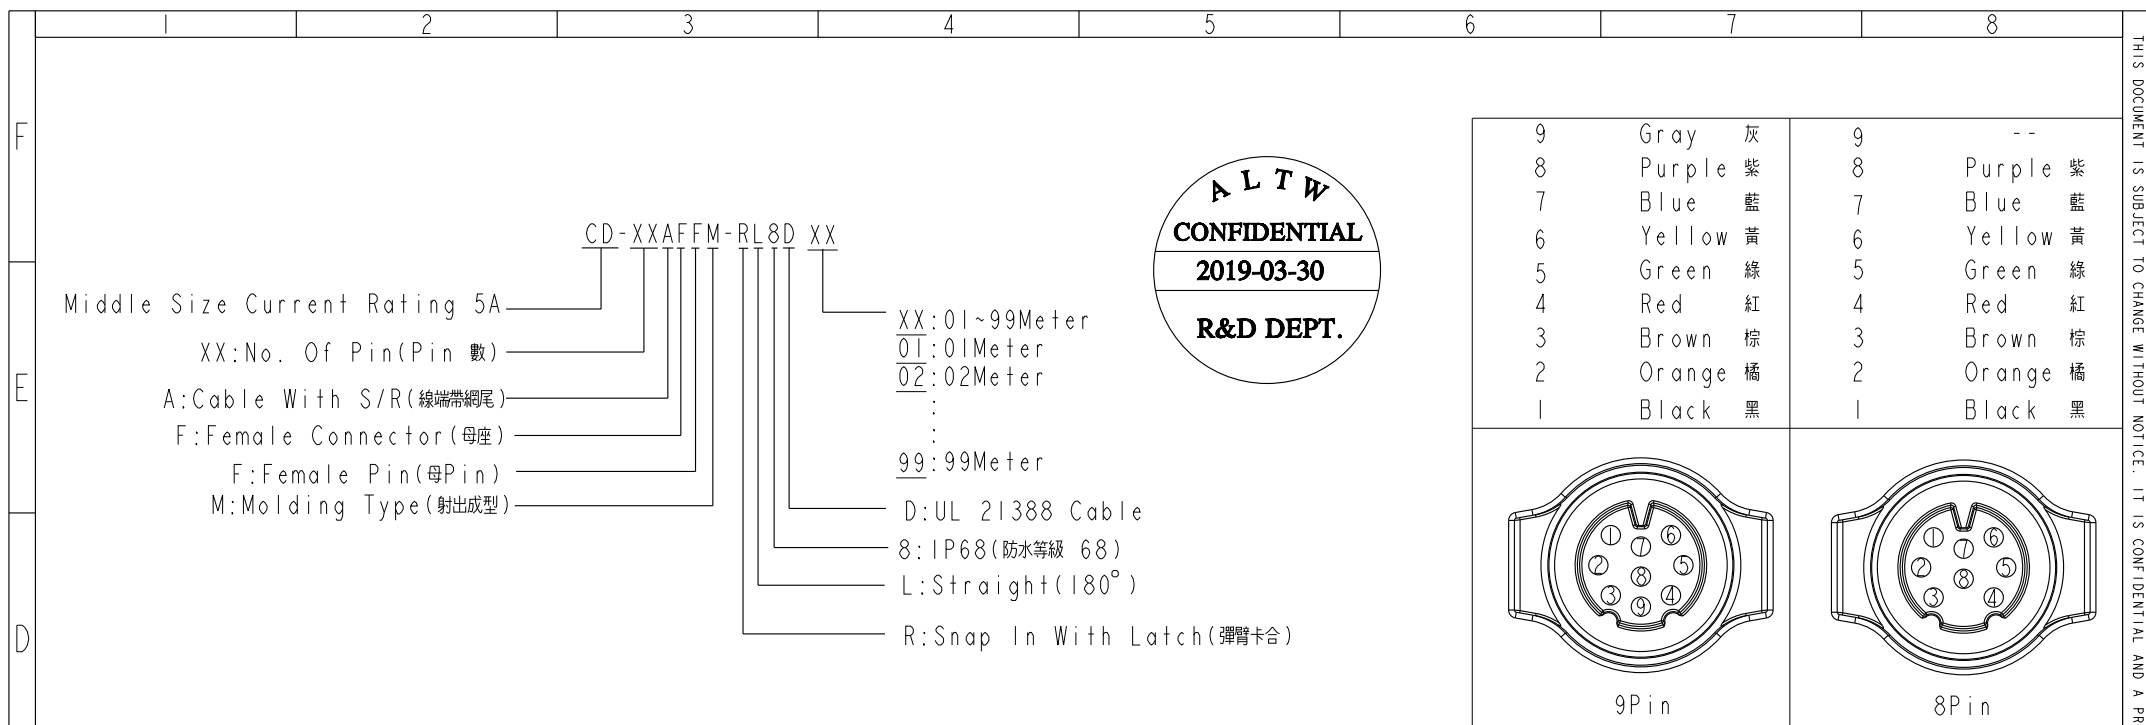

	Pin Out	4 -- 3 Brown 棕 2 -- 1 Black 黑	4 Red 紅 3 Brown 棕 2 -- 1 Black 黑	4 Red 紅 3 Brown 棕 2 Orange 橘 1 Black 黑	6 Yellow 黃 5 -- 4 Red 紅 3 Brown 棕 2 Orange 橘 1 Black 黑	6 Yellow 黃 5 Green 綠 4 Red 紅 3 Brown 棕 2 Orange 橘 1 Black 黑	9 -- 8 -- 7 Blue 藍 6 Yellow 黃 5 Green 綠 4 Red 紅 3 Brown 棕 2 Orange 橘 1 Black 黑
	Pin Assignments Front View						
		2Pin	3Pin	4Pin	5Pin	6Pin	7Pin

UNIT: mm			TITLE MIDDLE RBL F CONN F PIN CABLE	Amphenol LTW	ITEM NO	DRAWN BY Peng	DATE 2019-03-30
TOLERANCE ±0.5			SCALE 3:4	SIZE A4	DWG NO CD-XXAFFM-RL8DXX	CHECKED BY Mafei	DATE 2019-03-30
			REV. A	WC-REV. A.1	CUSTOMER ALTW	APPROVED BY Jerry	DATE 2019-03-30
			SHEET 2 OF 2 ◎: Inspection item		安費諾亮泰企業股份有限公司		