


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2020/08/21	Ruru	Old Item No. UA-20AMF-SB7AXX
B	C210802	2021/05/19	Ruru	△X1

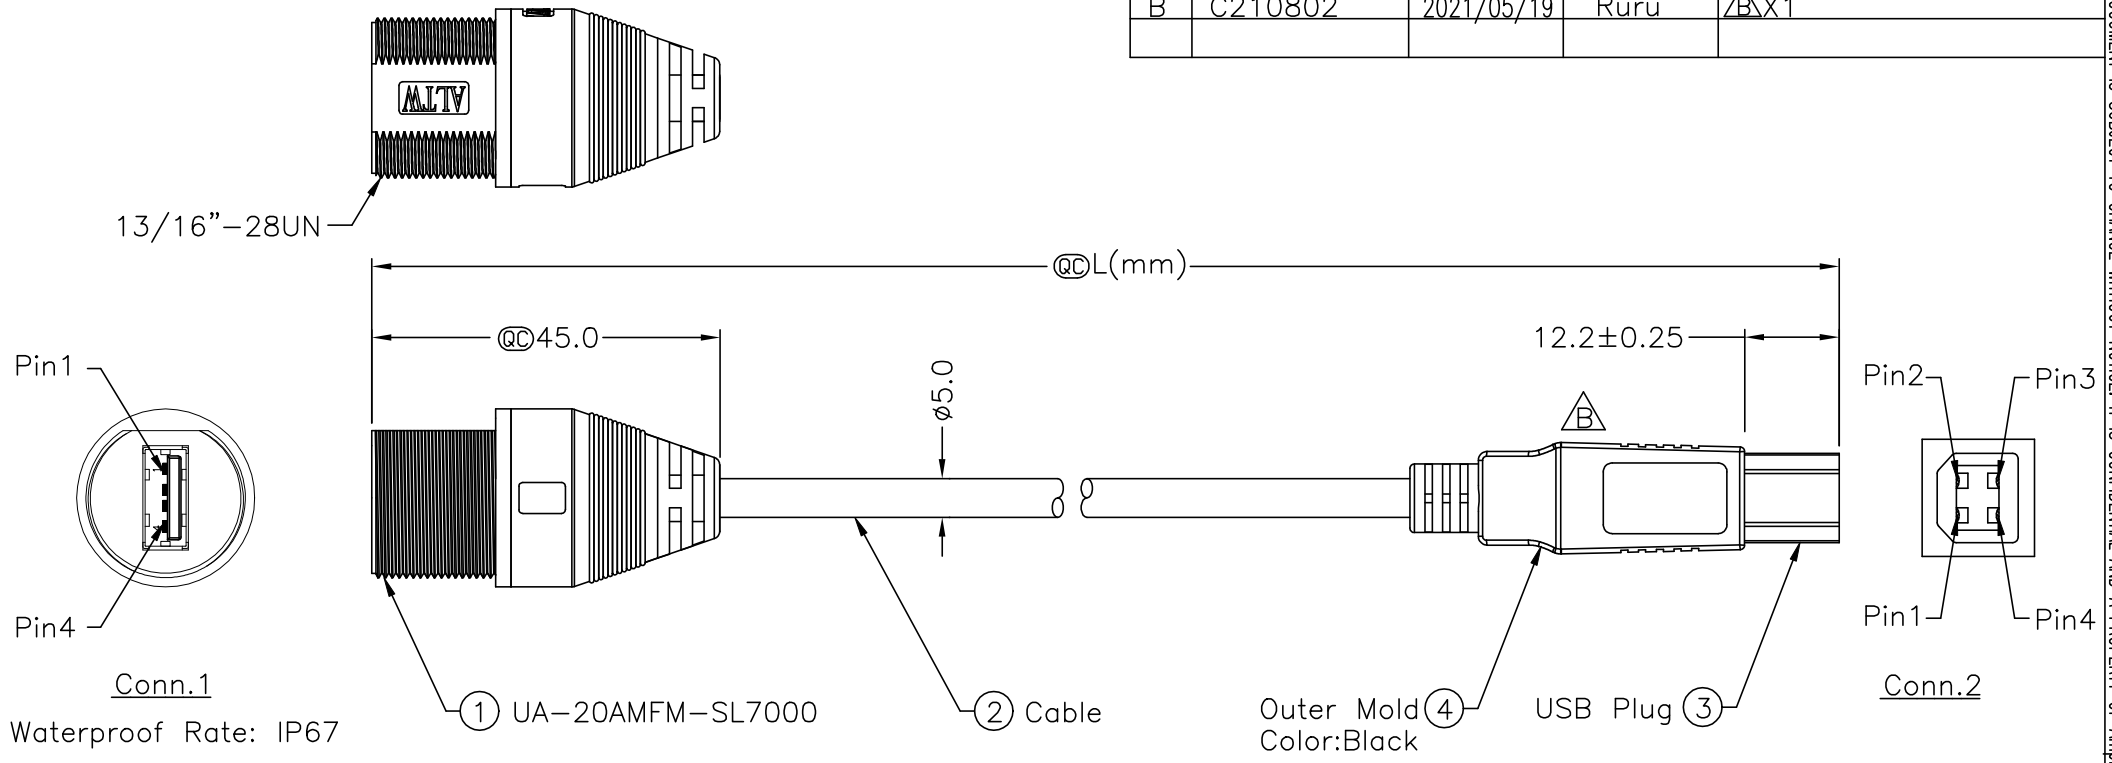

Conn.1
Waterproof Rate: IP67

① UA-20AMFM-SL7000

② Cable

④ Outer Mold
Color:Black

③ USB Plug

Conn.2

UA20ML-NBML-SA XXX

XXX:01~05Meters
001:01Meter
002:02Meters
:
:
005:05Meters
Cable Length(L):01~05Meters

- Note:
- * @C Important Dimension.
 - * Housing: Thermoplastic, Black.
 - * USB A: Female Solder Type, Gold Plated.
 - * USB B: Male Solder Type, Gold Plated.
 - * Cable:USB2.0 28#*1P+24#*2C+Al.My+D+B, PVC Jacket,UV Resistant,Black,OD=5.0mm.
 - * Do Not Include On The Connector " "
 - * Cable Length Tolerance:01M:±40mm
02M~05M:±60mm

Shield	Drain	地線	Shield
4	Black (24AWG)	黑	4
3	Green (28AWG)	綠	3
2	White (28AWG)	白	2
1	Red (24AWG)	紅	1
Conn.1	Wire Color		Conn.2
Pin Out			

Twist

UNIT:mm		TITLE
TOLERANCE		ACC, USB, A TYPE, DB-ENDED, MM
±0.5 mm		SCALE Free SHEET 1 OF 1
REV. B	SIZE A4	@C :Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO UA20ML-NBML-SAXXX	Ruru	2020/08/21
CUSTOMER	CHECKED BY	DATE
ALTW	Rita	2020/08/21
	APPROVED BY	DATE
	Max	2020/08/21

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

F
E
D
C
B
A

1 2 3 4 5 6 7 8