
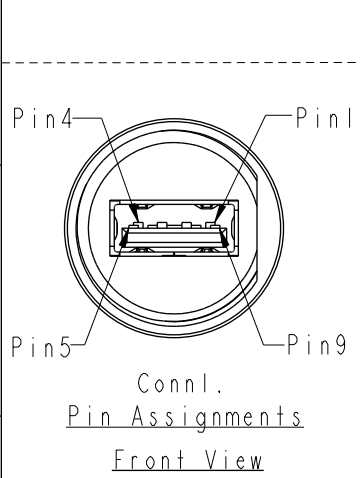


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Released	2020/08/21	Ruru	Old Item No. UA-30AMF-SD7BXX
B	C210350	2021/03/10	Ruru	\triangle B XI

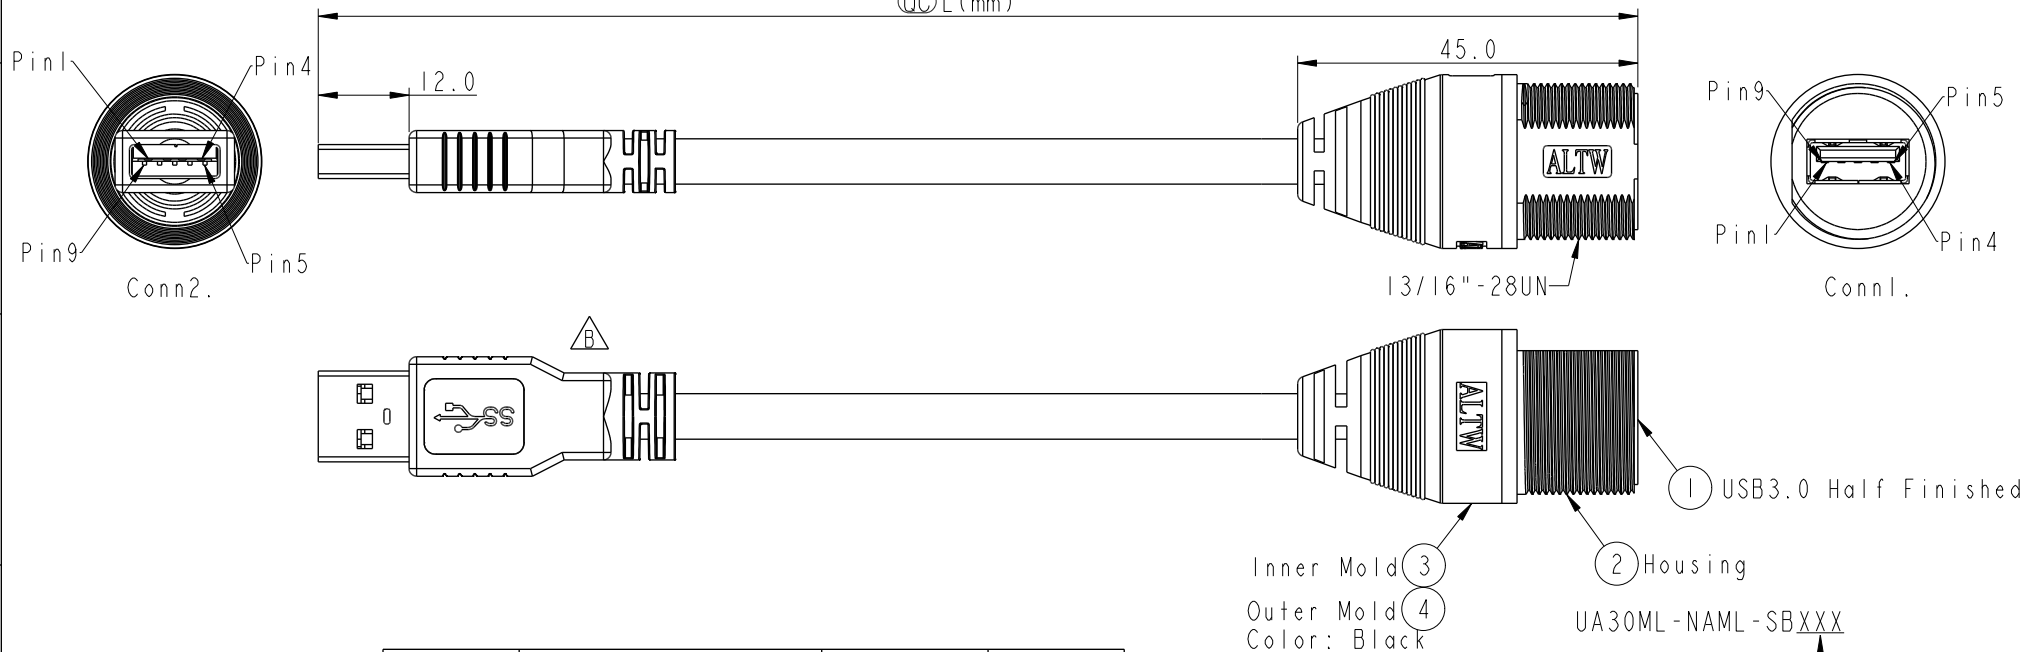

Shield	Braid	編織	Shield	Shield	
9	Orange 28AWG	橙	SDP2+	9	Twist
8	Purple 28AWG	紫	SDP2-	8	
7	Drain 28AWG		SDP2_Drain	7	Twist
6	Yellow 28AWG	黃	SDP1+	6	
5	Blue 28AWG	藍	SDP1-	5	Twist
7	Drain 28AWG		SDP1_Drain	7	
4	Black 28AWG	黑	GND_PWRrt	4	Twist
3	Green 28AWG	綠	UTP_D+	3	
2	White 28AWG	白	UTP_D-	2	Twist
1	Red 28AWG	紅	PWR	1	
Conn2.	Wire Color		Signal Name	Conn1.	

Inner Mold (3)
Outer Mold (4)
Color: Black

UA30ML-NAML-SBXXX

XXX: 01~03Meters
001: 01Meter
003: 03Meters
Cable Length(L): 01~03Meters

- Note:
- * \odot Important Dimension.
 - * Conn.1 Waterproof Rate: IP67
 - * Jack: USB3.0-A Female Solder
 - * Housing: Thermoplastic, Black
 - * Cable: UL2725(1P*28#+DAM)*2+1P*28#+2C*28#+ABD, PVC Jacket, UV Resistant, OD=6.0mm, Black
 - * Cable Length Tolerance: 01M: ±40mm
02M~03M: ±60mm
 - * All of Drain twisted together.

UNIT:mm

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE
ACC, USB, A TYPE, DB-ENDED, MM

SCALE 1:2 SIZE A4 SHEET 1 OF 1

REV. B WC-REV. A.6 \odot Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE

UA30ML-NAML-SBXXX

ALTW