


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/02/03	Vicky	Initial Released

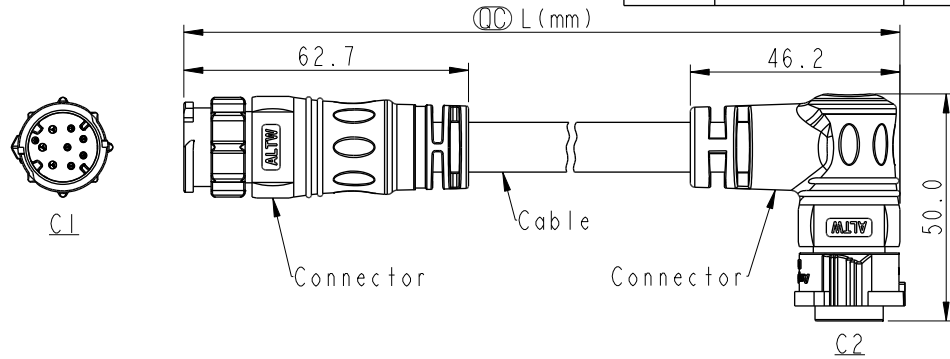


AB-CBD XX ML-CBDBR-OF XXX

08: 8Pin

XXX: 0.5~99Meters
 A05: 0.5 Meter
 001: 01 Meter
 002: 02 Meters
 :
 099: 99 Meters



C2
Pin Assignments
Front View



C1
Pin Assignments
Front View

8	Drain (26AWG)	地線	
7	Blue (26AWG)	藍	Twist 對線
6	Red (26AWG)	紅	
5	Green (26AWG)	綠	Twist 對線
4	White (26AWG)	白	
3	Black (16AWG)	黑	
2	Green (16AWG)	綠	
1	White (16AWG)	白	
C1 & C2	Wire Color		
Pin Out			

Note:

- * \varnothing Important Dimension
- * Waterproof Rate: IP68, Mated
IP68: 1M depth of water in 24hours
- * Connector: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Cable: UL21996, 16#*3C+(26#*2P+D+AL/MY)+AL/MY, PVC Jacket, Black, OD11.0mm
- * Cable Length Tolerance: 0.5M: +60/-0mm
 01M: +60/-0mm
 02~03M: +120/-0mm
 04~05M: +160/-0mm
 06~10M: \pm 100mm
 11~20M: \pm 200mm
 21~30M: \pm 300mm
 31~99M: \pm 500mm

UNIT:mm		
TOLERANCE	$\pm 0.5mm$	

TITLE ACC, XLOK, C-10A+5A, DB-ENDED MF		
SCALE 33:100	SIZE A4	SHEET 1 OF 1
REV. A	WC-REV. A.5	\varnothing : Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2020-02-03
DWG NO AB-CBDXXML-CBDBR-QFXXX	CHECKED BY Rita	DATE 2020-02-03
CUSTOMER ALTW	APPROVED BY Max	DATE 2020-02-03