
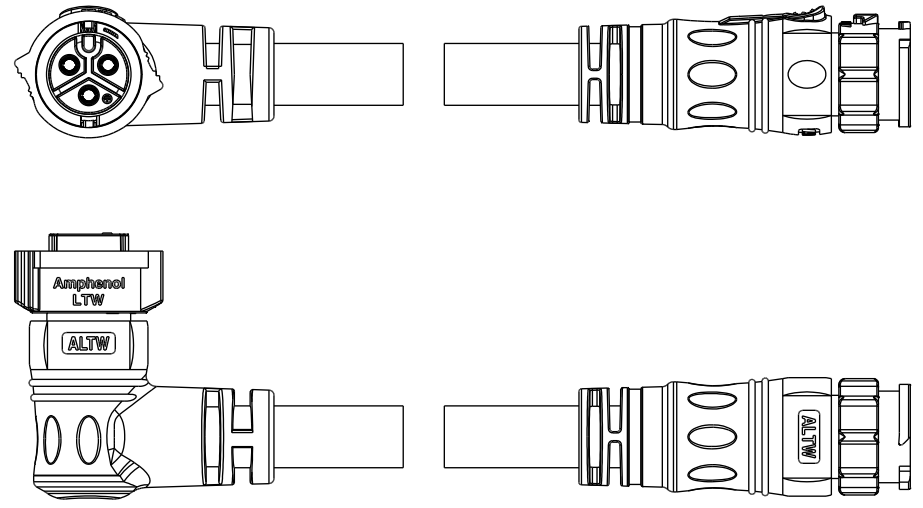



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/01/07	Ruru	Initial Released

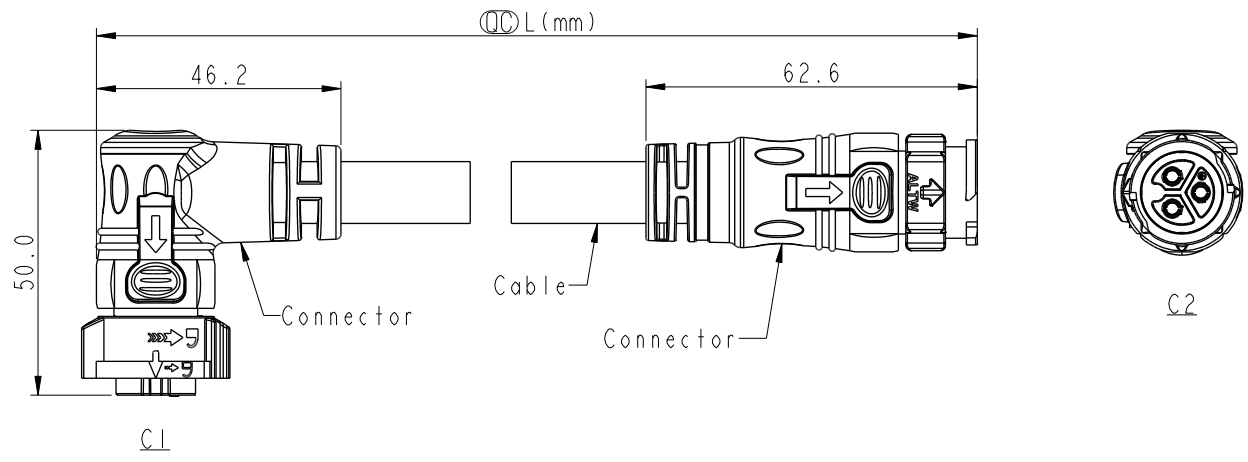

Note:
 * \varnothing Important Dimension.
 * Waterproof Rate: IP68, Mated.
 IP68: 1M depth of water in 24 hours.
 * Connector: Thermoplastic, Black.
 * Pin: Copper Alloy, Gold Plated.
 * Cable: SJTW, PVC Jacket, Black.
 * Cable Length Tolerance: 0.5M: +60/-0mm
 01M: +60/-0mm
 02~03M: +120/-0mm
 04~05M: +160/-0mm
 06~10M: ±100mm
 11~20M: ±200mm
 21~30M: ±300mm
 31~99M: ±500mm

UNIT: mm		TITLE
TOLERANCE	± 0.5 mm	ACC, XLOK, C-20A, DB-ENDED FM
SCALE	1:2	SIZE A4
REV.	A	SHEET 1 OF 2
WC-REV.		\varnothing : Inspection item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY	DATE
	Ruru	2020-01-07
DWG NO.	CHECKED BY	DATE
AB-CCXXFR-CCHL-QEXXX	Rita	2020-01-07
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2020-01-07

