

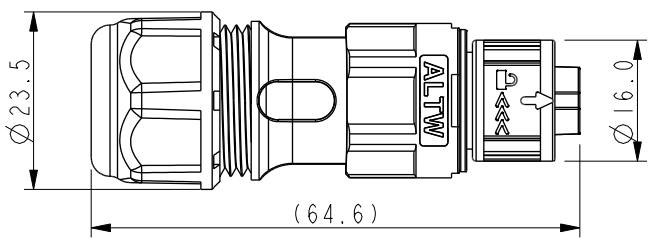


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020-01-17	Allen Pan	Rev.03 To Rev.A
B	C200150	2020-02-04	Allen Pan	△B x3
C	C210838	2020-05-17	Allen Pan	△C x2

△B AD - XX B F F B - Q L 8 A P 0

02: 2Pin  
03: 3Pin  
04: 4Pin  
05: 5Pin

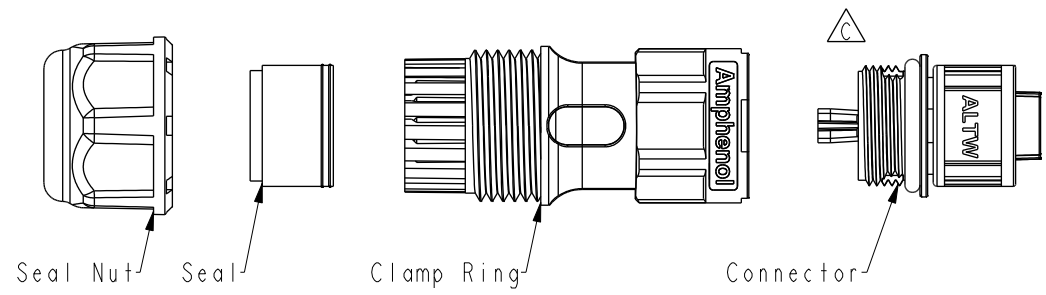

- △C Note:
- \* RoHS Compliant
  - \* Ⓞ Important Dimension
  - \* Waterproof Rate: IPX8, Mated 1m/24h
  - \* Connector
    - Housing: Thermoplastic, Black
    - Pin: Copper Alloy, Gold Plated
    - Nut: Thermoplastic, Black
    - O-Ring: Rubber, Gray
  - \* Clamp Ring: Thermoplastic, Black
  - \* Sealing Nut: Thermoplastic, Black
  - \* Seal 1: Rubber, Red, OD: Ø4.0mm~Ø6.0mm
  - \* Seal 2: Rubber, Blue, OD: Ø6.0mm~Ø8.0mm
  - \* One set unassembled in one PE bag

AD-02BFFB-QL8AP0	AD-03BFFB-QL8AP0	AD-04BFFB-QL8AP0	AD-05BFFB-QL8AP0

UNIT:mm		TITLE X-Lok A-Size Field Installable Screw-in Type F Conn. F Pin
TOLERANCE ±0.5 mm	SCALE 1:1	SIZE A4
	REV. C	SHEET 1 OF 1
	WC-REV. A.6	QC: Inspection item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Allen Pan	DATE 2020-01-17
DWG NO △B AD-XXBFFB-QL8AP0	CHECKED BY Sam Ho	DATE 2020-01-17
CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2020-01-17