

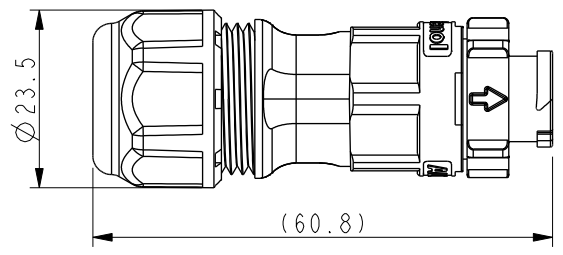


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020-02-04	Allen Pan	Rev.04 To Rev.A

AU - XX B M M B - Q L 8 A P 0

06: 6Pin
08: 8Pin

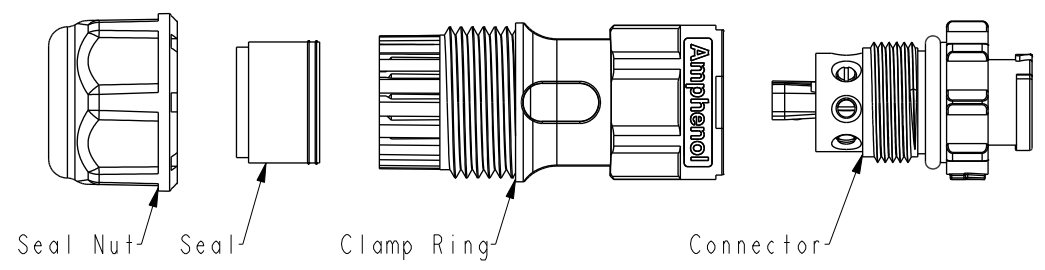

- Note:
- * IP: IP68 (Mated)
 - * Connector: Thermoplastic, Black.
 - * Pin: Copper Alloy, Gold Plated.
 - * Clamp Ring: Thermoplastic, Black.
 - * Seal Nut: Thermoplastic, Black.
 - * Seal: Rubber.
 - 1.Red Color Seal 1, Cable OD 4.0~6.0mm
 - 2.Blue Color Seal 2, Cable OD 6.0~8.0mm
 - * Wire Conductor: 20AWG~24AWG.



AU-06BMMB-QL8AP0 AU-08BMMB-QL8AP0

UNIT:mm		
TOLERANCE		
±0.5 mm		

TITLE X-Lok A-Size Field Installable Screw-in Type M Conn. M Pin			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. A	WC-REV. A.5	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Allen Pan	DATE 2020-02-04
DWG NO AU-XXBMMB-QL8AP0	CHECKED BY Sam Ho	DATE 2020-02-04
CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2020-02-04