
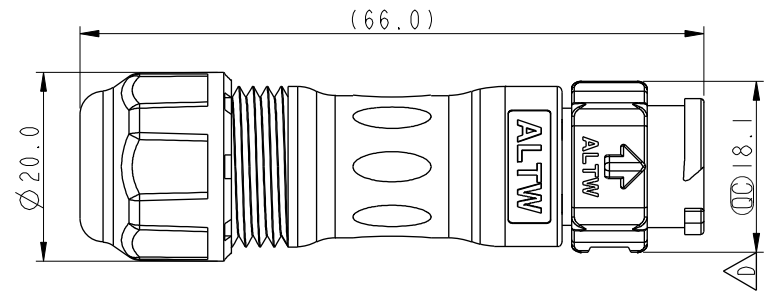


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
|------|---------|------------|-------------|--------------|
| B | CI91677 | 2019/09/24 | Brady Chung | Add New Type |
| C | CI91760 | 2019/10/15 | Jane | △C X5 |
| D | CI92018 | 2019/11/15 | Vicky | △D X4 |

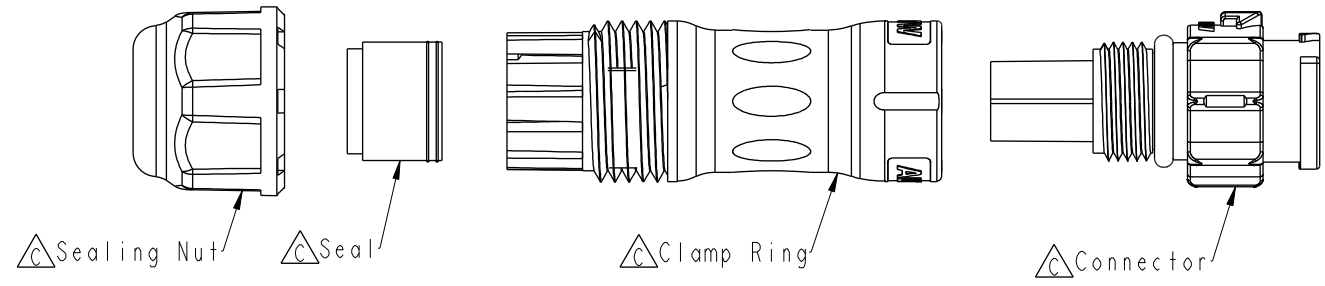




BB-XXBMMA-QL8XNP

02-2Pin
03-3Pin
04-4Pin

△C S: With Red Color Seal 1, Cable OD 5.0~6.0mm.
M: With Yellow Color Seal 2, Cable OD 6.0~8.0mm.
L: With Blue Color Seal 3, Cable OD 8.0~10.0mm.
A: With Seal 1 & Seal 2 & Seal 3.

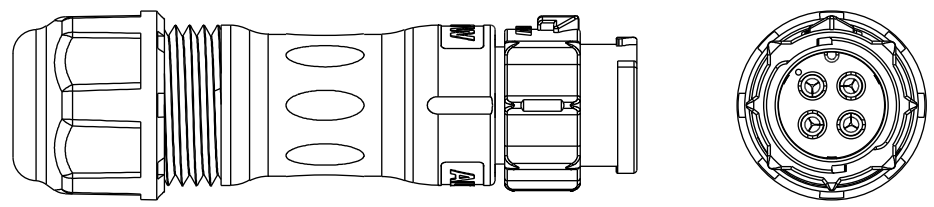

Pin Assignments Front View



2 Pin

3 Pin

4 Pin

- △D Note:
- * ∅ Important Dimension
 - * Waterproof Rate: IP68, Mated
 - * IP68: 1M Depth Of Water In 24hours
 - * Housing: Thermoplastic, Black
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Seals: Rubber

| | | | |
|-----------|--|--|----------------|
| UNIT:mm | | TITLE XLOK, B-10A, CABLE W/O SR M, M, FI CRIMP, XLOK | |
| TOLERANCE | | SCALE 1:1 | SIZE A4 |
| ±0.5mm | | REV. D | WC-REV. A.5 |
| | | SHEET 1 OF 1 | |
| | | ∅C: Inspection item | |

Amphenol LTW
安費諾亮泰企業股份有限公司

| | | |
|----------------------------|-------------------------|--------------------|
| ITEM NO | DRAWN BY Brady Chung | DATE 2019-09-24 |
| DWG NO BB-XXBMMA-QL8XNP | CHECKED BY Jane Wang | DATE 2019-09-24 |
| CUSTOMER ALTW | APPROVED BY Neo Tsai | DATE 2019-09-24 |