



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2016-05-09	Spring	Change Rev.01 To Rev.A

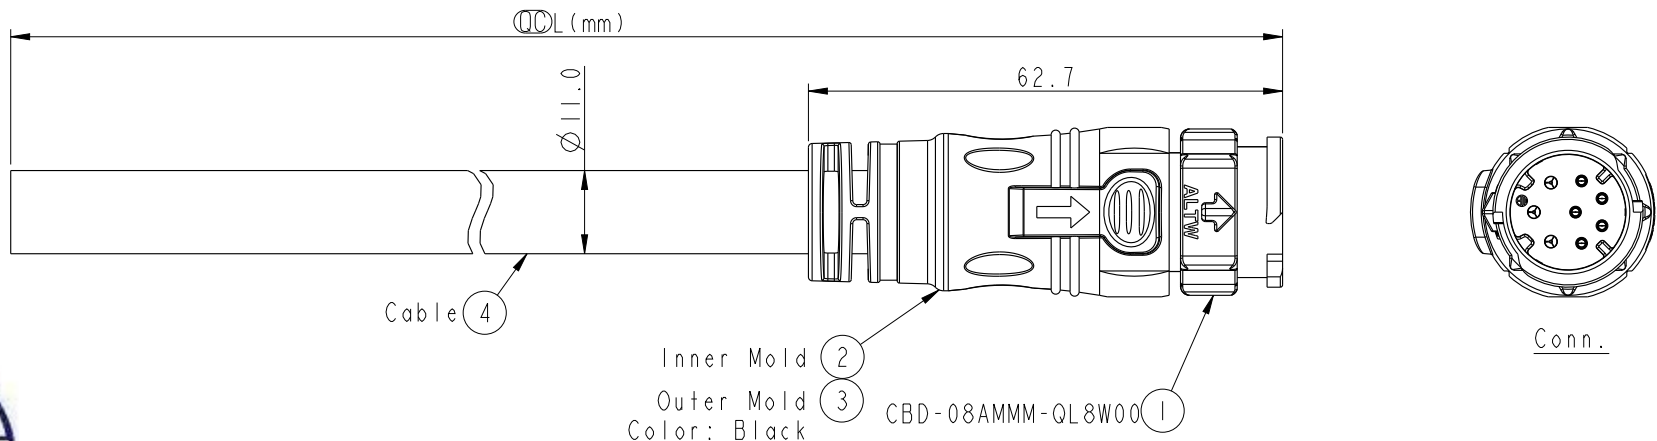


Inner Mold (2)
 Outer Mold (3) CBD-08AMMM-QL8W00 (1)
 Color: Black

- Note:
- * \varnothing Important Dimension To Check.
 - * Waterproof Rate: IP68(Mated, 1M/24hr)
 - * Working Voltage Rating:
 Power AC/DC 300V
 Data DC 30V
 - * Working Current:
 Power: 10A
 Data: 05A
 - * Housing: Nylon+GF, Black
 - * Pins: Copper Alloy, Gold & Ni Plated
 - * Cable: UL21996 3C*16AWG+(26#*2P+D+AL)+F+AL/MY, PVC Jacket, OD=11.0, Black.
 - * Cable Length Tolerance: 01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm

CBD-08AMMM-QL8FXX
 XX :01~99Meters
 01 :01Meter
 02 :02Meters
 :
 :
 99 :99Meters

8	Drain (26AWG) 地線	Twist 對線
7	Blue (26AWG) 藍	
6	Red (26AWG) 紅	Twist 對線
5	Green (26AWG) 綠	
4	White (26AWG) 白	
3	Black (16AWG) 黑	
2	Green (16AWG) 綠	
1	White (16AWG) 白	
Conn.	Wire Color	
	Pin Out	

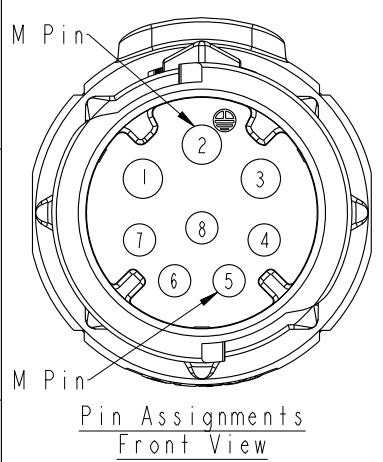

UNIT:mm

TOLERANCE ±0.5

TITLE X-Lok C Size Cable Molding 8Pin M Connector M Pin			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. A	WC-REV. A.1	\varnothing : Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Spring	DATE 2016-05-09
DWG NO CBD-08AMMM-QL8FXX	CHECKED BY Fisher	DATE 2016-05-09
CUSTOMER ALTW	APPROVED BY Kevin	DATE 2016-05-09

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.