


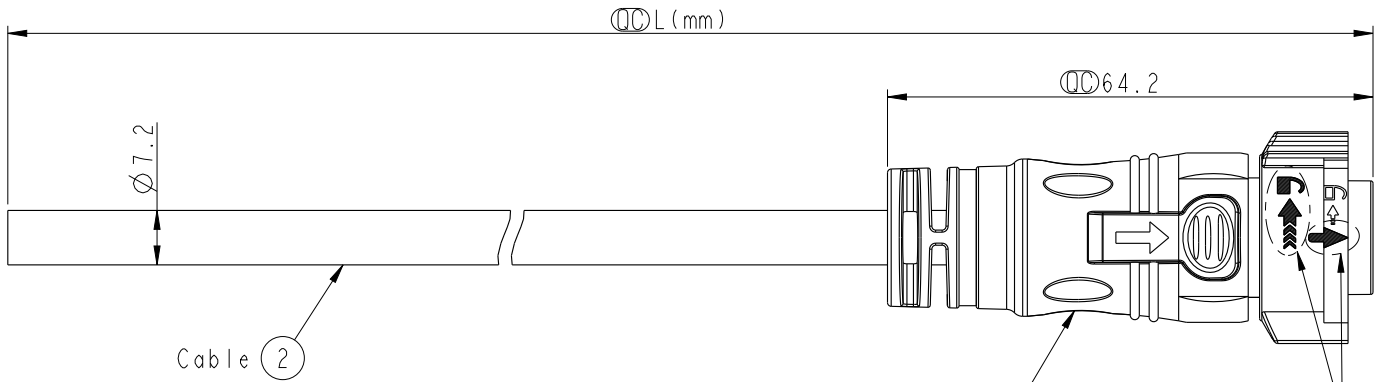


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN15C0093	2015-12-01	Spring	update the pin out and note



CD-08AFMM-QL8W00  
Color: Black


White Printing  
白色印刷



CD-08AFMM-QL8DXX

XX : 01~99Meters  
01 : 01Meter  
02 : 02Meters  
 :  
 :  
99 : 99Meters

- Note:
- \*  $\varnothing$  Important Dimension To Check.
  - \* Working Voltage Rating: AC 300V
  - \* Working Current Rating: 5A
  - \* Waterproof Rate: IP68(Mated)  
 (in 1 meter water within 24 hours)
  - \* Housing: Nylon+GF, Black
  - \* Male Pin: Copper Alloy, Gold Plated
  - \* Cable: UL21388 20AWG\*8C+AL/PET Tape  
 Black, PVC Jacket UV Resistant, OD=7.2
  - \* Cable Length Tolerance: 01M: ±40mm  
 02M~05M: ±60mm  
 06M~10M: ±100mm  
 11M~30M: ±200mm  
 31M~99M: ±500mm



Pin Assignments  
Front View

8	Green	綠
7	Orange	橙
6	Blue	藍
5	Purple	紫
4	Yellow	黃
3	Black	黑
2	Red	紅
1	Brown	棕
Conn.	Wire Color	
	Pin Out	



UNIT:mm		
TOLERANCE	±0.5	

TITLE X Lok C-Size Cable 8 Pin 5A F Conn. M Pin		
SCALE 1:1	SIZE A4	SHEET 1 OF 1
REV. B	WC-REV. A.2	$\varnothing$ : Inspection item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Spring	DATE 2015-12-01
DWG NO CD-08AFMM-QL8DXX	CHECKED BY Fisher	DATE 2015-12-01
CUSTOMER ALTW	APPROVED BY Kevin	DATE 2015-12-01