


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-980026~29	2009/07/22	Prune	Update the drawing view
C	LEN1530024-027	2015/02/12	Vicky	Update Logo

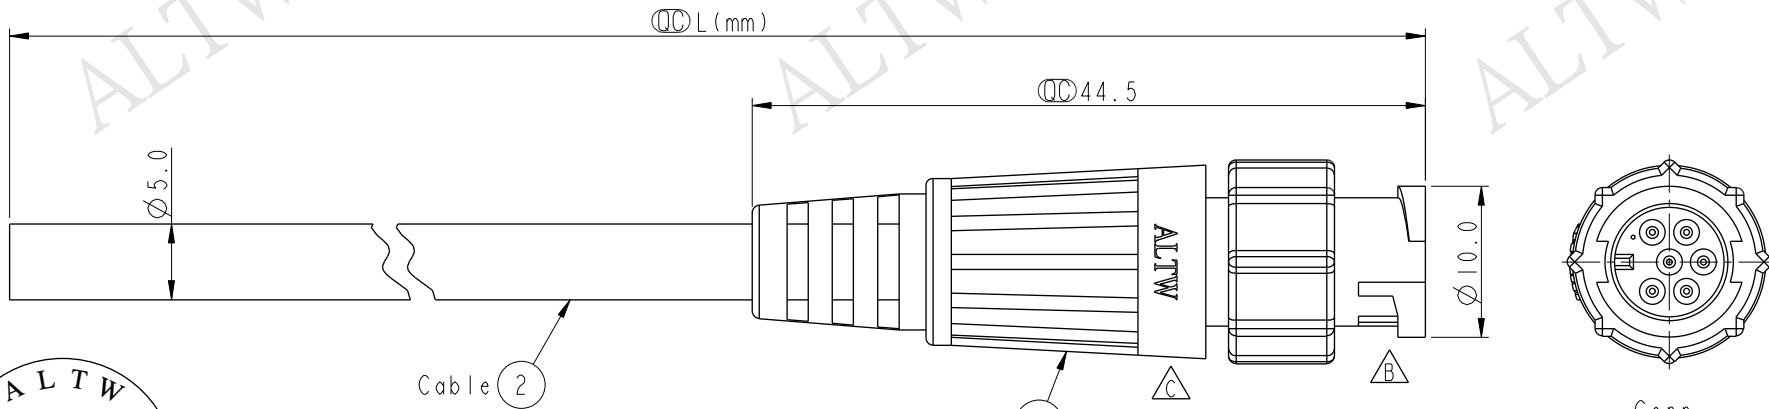

ALTW
 CONFIDENTIAL
 2015-02-12
 R&D DEPT.

ALTW
 DCC. DEPT.
 CONFIDENTIAL
 2015.03.04
 ISSUED

AU-06AMMM-LL6000
Color: Black


AU-06AMMM-LL6AXX

XX: 01~99Meters
 01: 01Meter
 02: 02Meters
 :
 :
 :
 99: 99Meters

Cable Length(L): 01~99Meters

Note:

- * \varnothing Important Dimension
- * Waterproof Rate: IP66
- * Connector: Nylon+GF, Black
- * Male Pin: Copper Alloy, Gold Plated
- * Cable: UL2464 26AWG*6C+Drain+Al/My, Black, PVC Jacket, UV Resistant, OD5.0mm
- * Cable Length Tolerance:
 - 01M: ±40mm
 - 02M~05M: ±60mm
 - 06M~10M: ±100mm
 - 11M~30M: ±200mm
 - 31M~99M: ±500mm



Pin Assignments
Front View

6	Gray	灰
5	Yellow	黃
4	Green	綠
3	White	白
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
	Pin Out	

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE Mini Cable Lock 6Pin M Conn M Pin			
SCALE 2:1	SIZE A4	SHEET 1 OF 1	
REV. C	WC-REV. A.1	\varnothing : Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2015-02-12
DWG NO AU-06AMMM-LL6AXX	CHECKED BY Rita	DATE 2015-02-12
CUSTOMER ALTW	APPROVED BY Lion	DATE 2015-02-12