


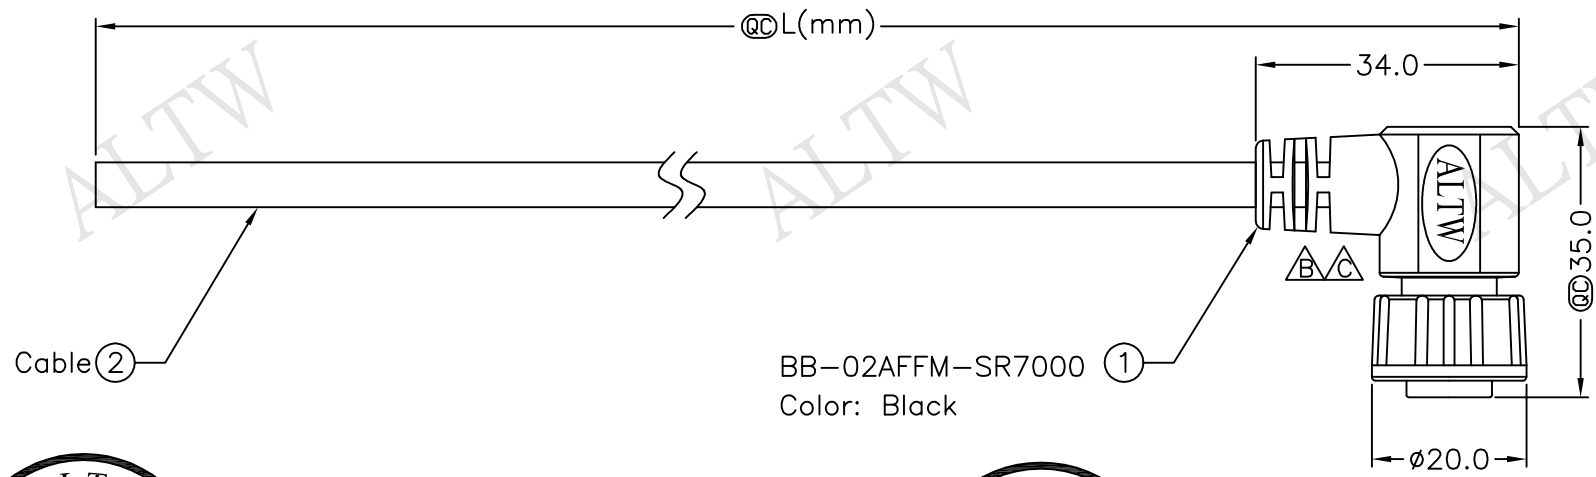


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1190069~73	2011/08/19	Jiang Jun Hua	Change SR View
C	LEN1610063~67	2015/12/28	Ruru	Change Logo




BB-02AFFM-SR7AXX
 ↑
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters



Conn.

- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: Black, Nylon+GF
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: Black, UL2464 20AWG*2C+Drain+Al/My PVC Jacket UV Resistant OD=5.8mm
 - * Cable Length Tolerance:01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm



Pin Assignments
Front View

2	Red	紅
1	Green	綠
Conn.	Wire Color	
	Pin Out	

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard Cable Screw 2Pin F Conn. F Pin		
SCALE	Free	SHEET	1 OF 1
REV.	C	SIZE	A4 @C :Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
	Ruru	2015/12/28
BB-02AFFM-SR7AXX	Rita	2015/12/28
ALTW	Lisa	2015/12/28

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.