




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1660119~122	2016/05/26	Ruru	Change Logo & Note

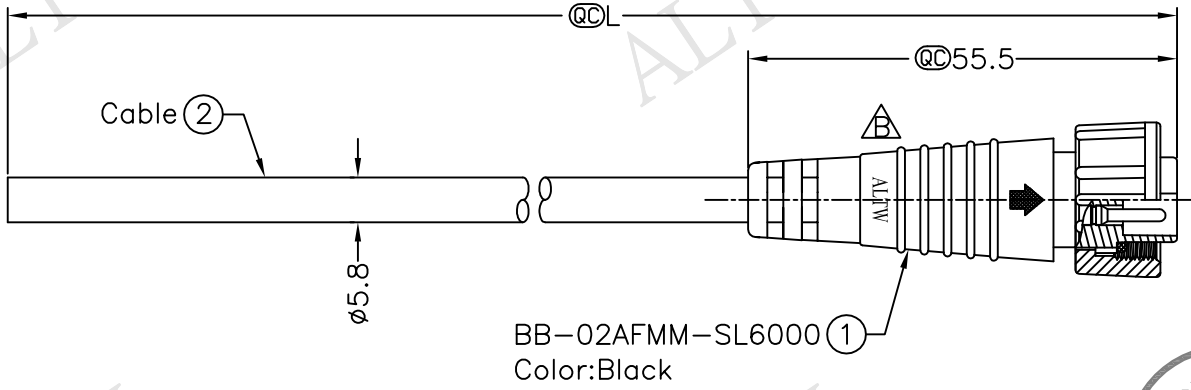


Conn.



BB-02AFMM-SL6AXX  
 XX:01~99Meter  
 01:01Meter  
 02:02Meters  
 ...  
 99:99Meters  
 Cable Length(L):01~99Meters



- Note:
- \* @C Important Dimension.
  - \* Waterproof Rate: IP66
  - \* Housing: Nylon+GF, Black
  - \* Male Pin: Copper Alloy, Gold Plated
  - \* O-Ring: EPDM, Black
  - \* Nut: Nylon+GF, Black
  - \* Cable: UL2464 20#\*2C+Drain+Al/My, UV Resistant, OD=5.8mm, Black
  - \* Cable Length Tolerance: 01M: ±40mm  
 02M~05M: ±60mm  
 06M~10M: ±100mm  
 11M~30M: ±200mm  
 31M~99M: ±500mm



Pin Assignments Front View 前視圖

Red	紅	2
Green	綠	1
Wire Color		Conn.
Pin Out		

UNIT:mm		TITLE Standard Cable Screw 2P F Conn M Pin
TOLERANCE	±0.5 mm	SCALE 1:1 SHEET 1 OF 1
REV. B	SIZE A4	@C :Inspection Item

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2016/05/26
DWG NO BB-02AFMM-SL6AXX	CHECKED BY Rita	DATE 2016/05/26
CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016/05/26

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.