


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

5	6	7	8
REV.	ECN NO.	DATE	SIGN

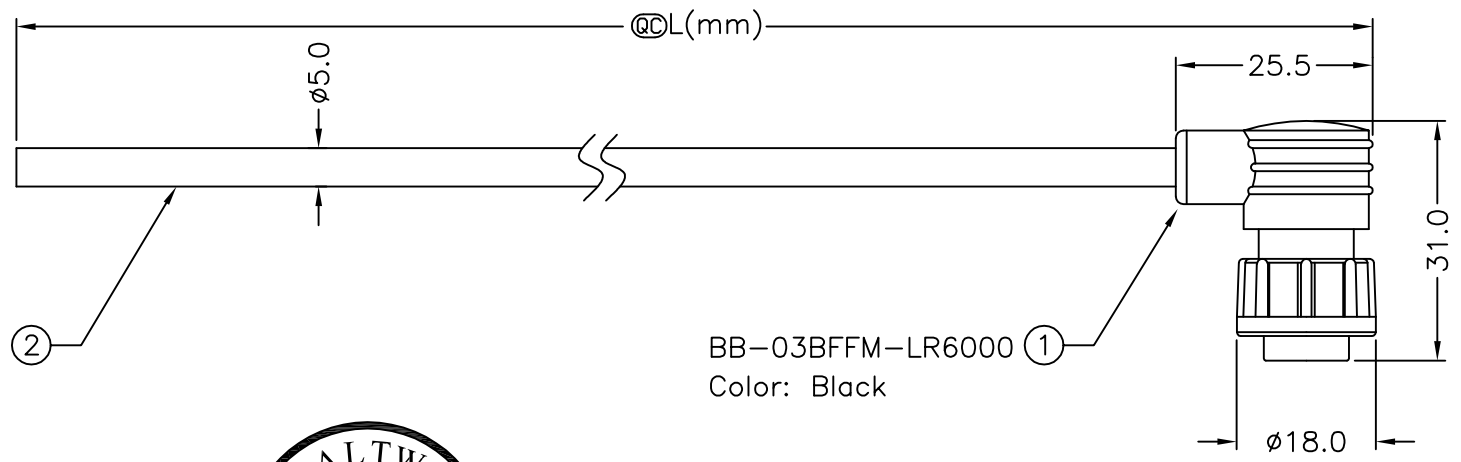


BB-03BFFM-LR6000 ①  
Color: Black



BB-03BFFM-LR6AXX

- XX:01~99Meter
- 01:01Meter
- 02:02Meters
- ⋮
- ⋮
- 99:99Meters


Cable Length(L):01~99Meters



Conn.



- Note:
- \* @DL Important Dimension To Check.
  - \* Waterproof Rate: IP66
  - \* Housing: Black, Nylon+GF
  - \* Pin: Copper Alloy, Gold Plated
  - \* Cable: Black, UL2464 20AWG\*3C+Al/My  
PVC Jacket UV Resistant OD=5.0mm
  - \* Cable Length Tolerance:1M~10M±5%mm,11M~99M±500mm.



Pin Assignments  
Front View

3	Yellow
2	White
1	Black
Conn.	Wire Color
Pin Out	

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE		Standard, Cable Lock 3Pin F Conn. F Pin	
SCALE	Free	SHEET	1 OF 1
REV.	A	SIZE	A4
QC :Inspection Item			

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	BB-03BFFM-LR6AXX
CUSTOMER	ALTW

DRAWN BY	Raul Paulo Canja
CHECKED BY	Ricky Valerio
APPROVED BY	Win

DATE	2007/01/26
DATE	2007/01/27
DATE	2007/01/27

A B C D E F

1 2 3

4

5

6 7

8