



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

5	6	7	8
REV.	ECN NO.	DATE	SIGN


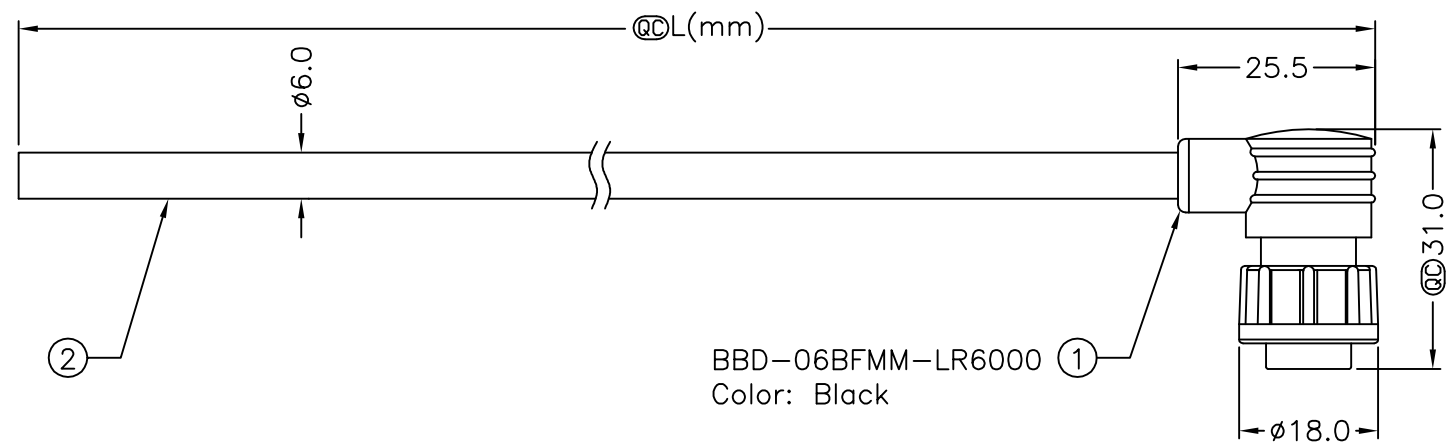


BBD-06BFMM-LR6000 ①
Color: Black


BBD-06BFMM-LR6AXX
 ↑
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters



Conn.



- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Black, Nylon+GF
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464(20AWG*2C+24AWG*4C)+Drain+Al/My,Black
PVC Jacket UV Resistant, OD=6.0
 - * Cable Length Tolerance:1M~10M±5%mm,11M~99±500mm



Pin Assignments
Front View

6	Gray	(24AWG)
5	Blue	(20AWG)
4	Yellow	(24AWG)
3	Green	(24AWG)
2	Brown	(20AWG)
1	White	(24AWG)
Conn.	Wire Color	
Pin Out		

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard	
Cable Lock 6Pin F Conn M Pin		
SCALE	Free	SHEET 1 OF 1
REV. A	SIZE A4	@C :Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	BBD-06BFMM-LR6AXX
CUSTOMER	ALTW

DRAWN BY	Raul Paulo Canja
CHECKED BY	Ricky Valerio
APPROVED BY	Win

DATE	2007/01/17
DATE	2007/01/26
DATE	2007/01/26

1
F
E
D
C
B
A

2
3

4
5

6

7

8
FMW0702-01-01A2