



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-0C0543~546	2010/11/29	Ivan	Change View
C	LEN1660072~075	2016/05/27	Ruru	Change Logo

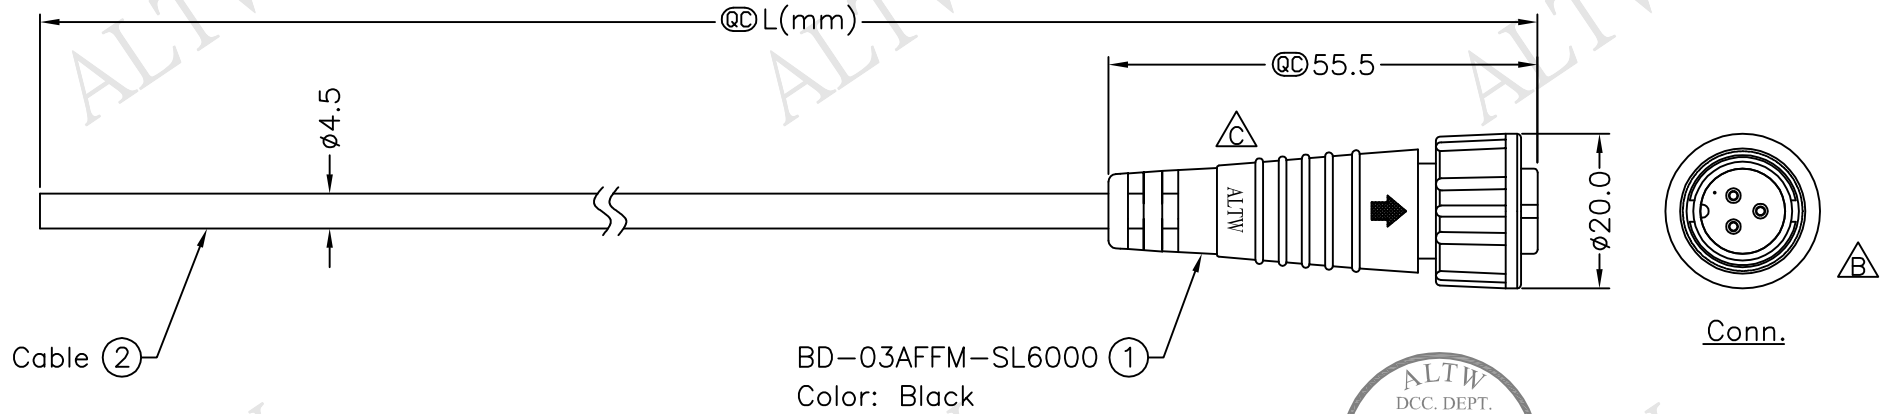

BD-03AFFM-SL6AXX


XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters

Cable Length(L):01~99Meters



Pin Assignments
Front View

3	Black	黑
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
	Pin Out	



Note:

- * @C Important Dimension To Check.
- * Waterproof Rate: IP66
- * Housing: Nylon+GF ,Black
- * Female Pin: Copper Alloy, Gold Plated
- * Cable: UL2464 24AWG*3C+D+Al/My
PVC Jacket (UV Resistant) OD=4.5, Black
- * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard	
	Cable Screw 3Pin F Conn. F Pin	
SCALE	Free	SHEET 1 OF 1
REV. C	SIZE A4	@C :Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	BD-03AFFM-SL6AXX
CUSTOMER	ALTW

DRAWN BY	Ruru
CHECKED BY	Rita
APPROVED BY	Lisa

DATE	2016/05/27
DATE	2016/05/27
DATE	2016/05/27

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.