





THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Release	2013-03-14	Kevin Wang	

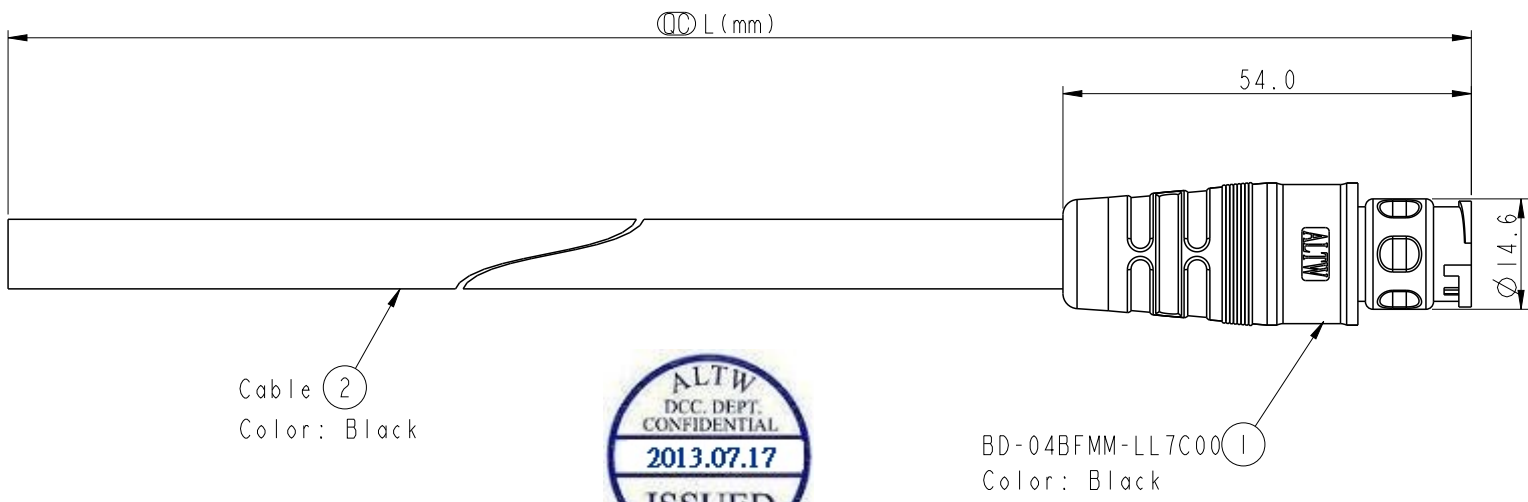

Pin Assignments  
Front View

4	Red	紅
3	Green	綠
2	White	白
1	Black	黑
Conn.	Wire Color	
	Pin Out	

BD-04BFMM-LL7CXX

- XX : 01~99Meters
- 01 : 01Meter
- 02 : 02Meters
- ...
- 99 : 99Meters

Cable Length(L): 01~99Meters

- Note:
- \*  $\varnothing$  Important Dimension To Check.
  - \* Waterproof Rate: IP67
  - \* Housing: M-PPE, Black.
  - \* Male Pin: Copper Alloy, Gold Plated.
  - \* Cable: TC-ER 18AWG\*4C+Filler, PVC Jacket, UV Resistant, OD=9.2mm, Black.
  - \* Connetor Temperature: -40~+90°C (Static Application)  
-25~+90°C (Occasionally Moving)
  - \* Working Voltage Rating: 300V AC
  - \* Working Current Rating: 5A
  - \* Withstanding Voltage: 6KV
  - \* Cable Length Tolerance: 01M: ±40mm  
02M~05M: ±60mm  
11M~30M: ±200mm  
31M~99M: ±500mm

UNIT: mm	
TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE STANDARD CABLE LOCK 4P M CONN M PIN			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. A	WC-REV. A.4	$\varnothing$ : Inspection item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Kevin	DATE 2013-06-27
DWG NO BD-04BMMM-LL7CXX	CHECKED BY Micky	DATE 2013-06-27
CUSTOMER ALTW	APPROVED BY Maslow	DATE 2013-06-27