


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN-8B0451~454	2008/10/02	Ivan	Update notes
D	LEN1610328~331	2016/01/19	Ruru	Change Logo & Note
E	LEN1790414~417	2017/09/27	Ruru	Update View
F	LEN1840001~004	2018/03/29	Ethan	Change Notes

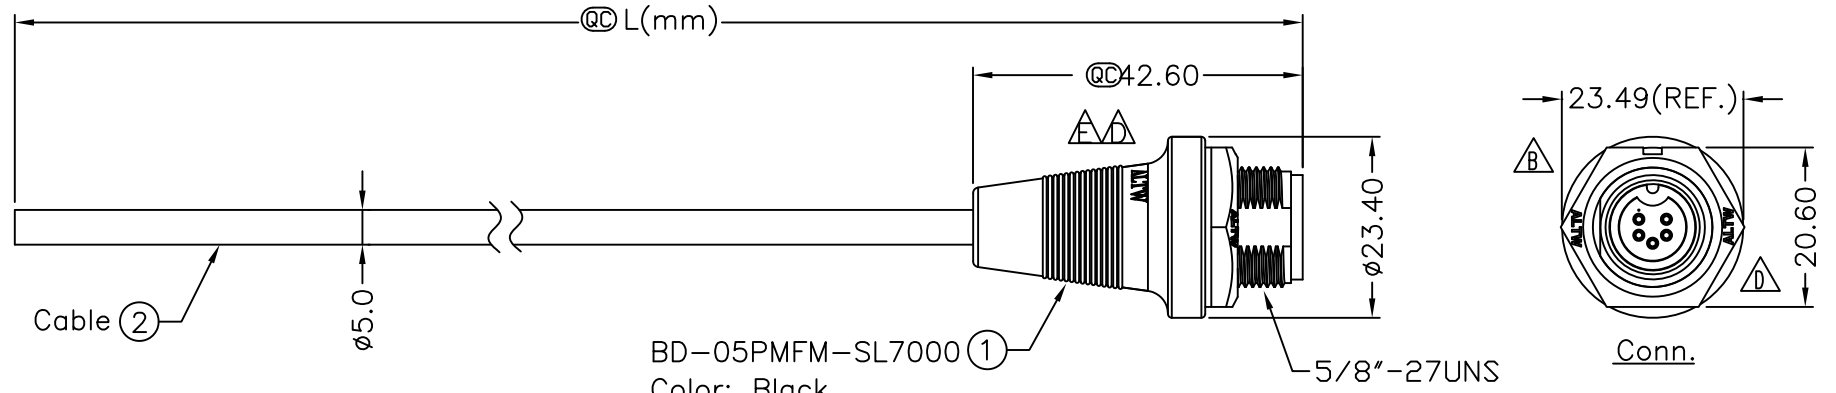




BD-05PMFM-SL7000 ①
 Color: Black
 BD-05PMFM-SL7AXX

XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters

Cable Length(L):01~99Meters

- Note: $\triangle B$
- * \textcircled{D} Important Dimensions To Check.
 - * Waterproof Rate: IP67
 - * Housing: Black,Nylon+GF
 - * Female Pin: Copper Alloy,Gold Plated
 - * Gasket: Black,EPDM
 - * Nut: Black,Nylon+GF
 - $\triangle A$ * Cable: UL2464 24AWG*5C+Drain+Al/My Black,PVC Jacket UV Resistant, OD=5.0
 - $\triangle C$ * Use With Waterproof Cap Or Dust Cap
Panel Thickness Max: 2.5mm
 - $\triangle C$ * Use Without Waterproof Cap Or Dust Cap
Panel Thickness Max: 3.5mm
 - $\triangle D$ * Cable Length Tolerance: 01M: ± 40 mm
02M~05M: ± 60 mm
06M~10M: ± 100 mm
11M~30M: ± 200 mm
31M~99M: ± 500 mm

5	Green	綠
4	White	白
3	Black	黑
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	

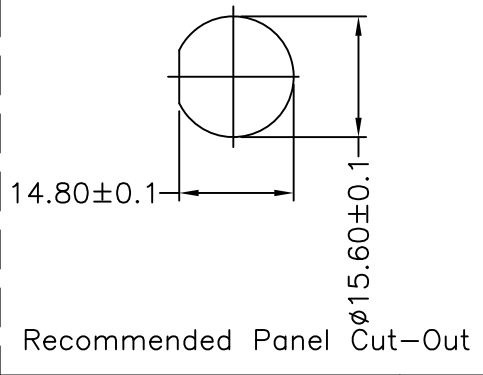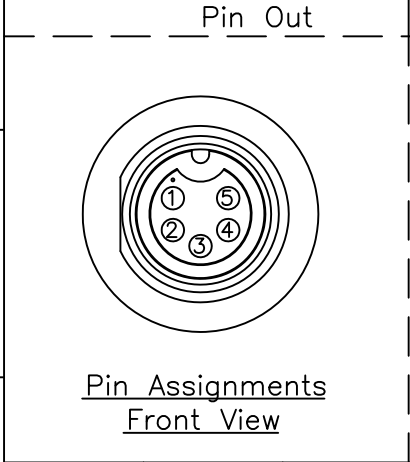

UNIT:mm	\textcircled{D}	TITLE
TOLERANCE	± 0.5 mm	Standard,Cable Screw 5Pin M Conn. F Pin
SCALE	Free	SHEET 1 OF 1
REV.	F	SIZE A4
		\textcircled{C} :Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE

BD-05PMFM-SL7AXX
 Ethan
 2018/03/29
 Feng Li
 2018/03/29
 ALTW
 Jerry
 2018/03/29

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.