


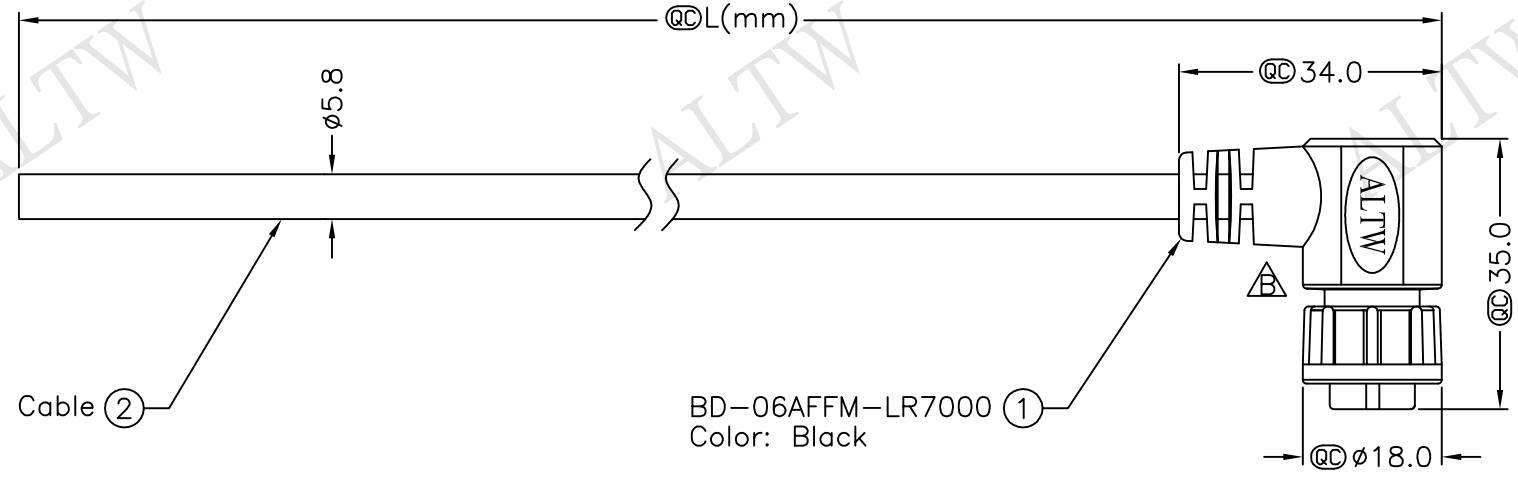



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1620085~088	2016/01/08	Ruru	Change Logo & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



Conn.



Pin Assignments  
Front View

6	White
5	Red
4	Orange
3	Yellow
2	Green
1	Blue
Conn.	Wire Color
	Pin Out

Notes:

- \* @C Important Dimensions To Check.
- \* Waterproof Rate: IP67
- \* Housing: Nylon+GF, Black
- \* Female Pin: Copper Alloy, Gold Plated
- \* Cable: UL2464 24AWG\*6C+Drain+Al/My, Black PVC Jacket UV Resistant, OD=5.8
- △\* Cable Length Tolerance: 01M: ±40mm  
02M~05M: ±60mm  
06M~10M: ±100mm  
11M~30M: ±200mm  
31M~99M: ±500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE		6Pin F Conn. F Pin(5A) To Cable	
SCALE	Free	SHEET	1 OF 1
REV.	B	SIZE	A4
		@C	: Inspection Item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2016/01/08
DWG NO	CHECKED BY	DATE
BD-06AFFM-LR7AXX	Rita	2016/01/08
CUSTOMER	APPROVED BY	DATE
ALTW	Lisa	2016/01/08