

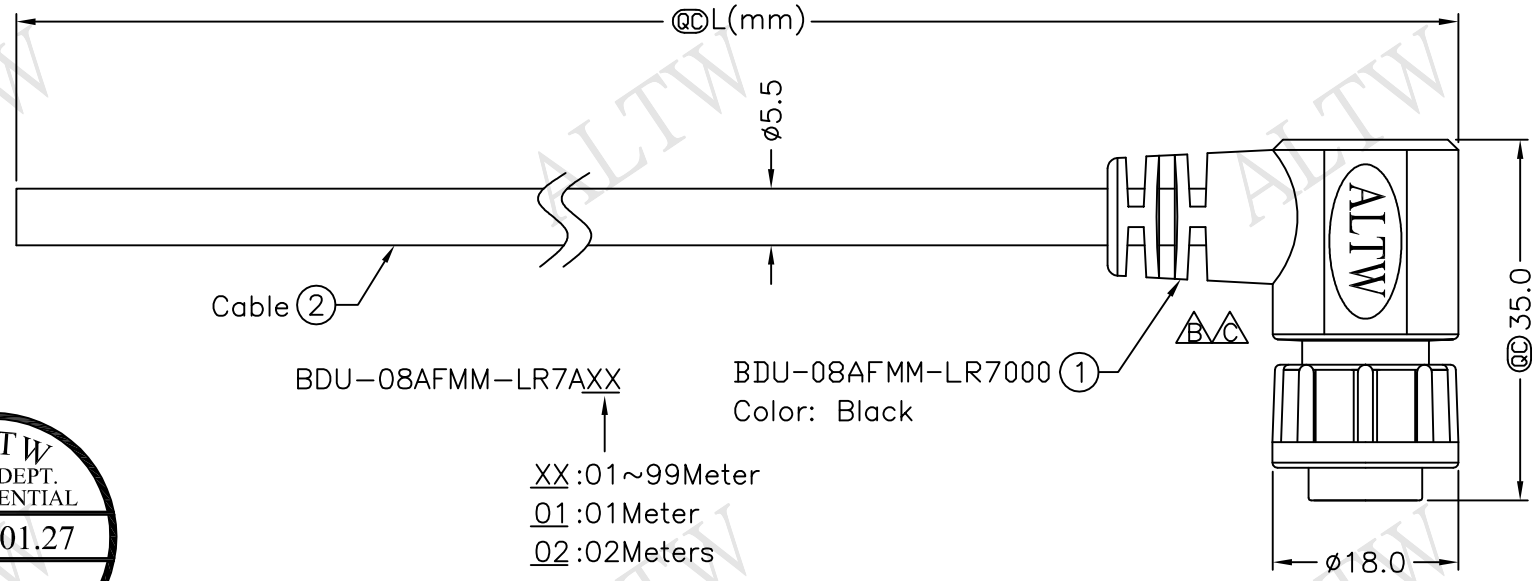



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN12B0105~108	2012/11/22	Vicky	Modify SR View & Note.
C	LEN1610371~374	2016/01/11	Ruru	Change Logo

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.



BDU-08AFMM-LR7AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 ...
 99:99Meters
 Cable Length(L):01~99Meters



Conn.	Wire Color	Pin Out
8	Red	26AWG 紅
7	Pink	26AWG 粉紅
6	Gray	26AWG 灰
5	Blue	24AWG 藍
4	Green	26AWG 綠
3	White	26AWG 白
2	Brown	24AWG 棕
1	Yellow	26AWG 黃

- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate:IP67.
 - * Connector:Nylon+GF,Black.
 - * Male Pin:Copper Alloy,Gold Plated.
 - * Cable: Black, UL2464 (24AWG*2C+26AWG*6C) +Drain+Al/My, PVC Jacket UV Resistant,OD=5.5mm
 - * Cable Length Tolerance: 01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard	
	Cable Lock 8Pin F Conn M Pin	
SCALE	Free	SHEET 1 OF 1
REV. C	SIZE A4	@C :Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2016/01/11
DWG NO BDU-08AFMM-LR7AXX	CHECKED BY Rita	DATE 2016/01/11
CUSTOMER ALTW	APPROVED BY Lisa	DATE 2016/01/11