




5	6	7	8
REV.	ECN NO.	DATE	SIGN

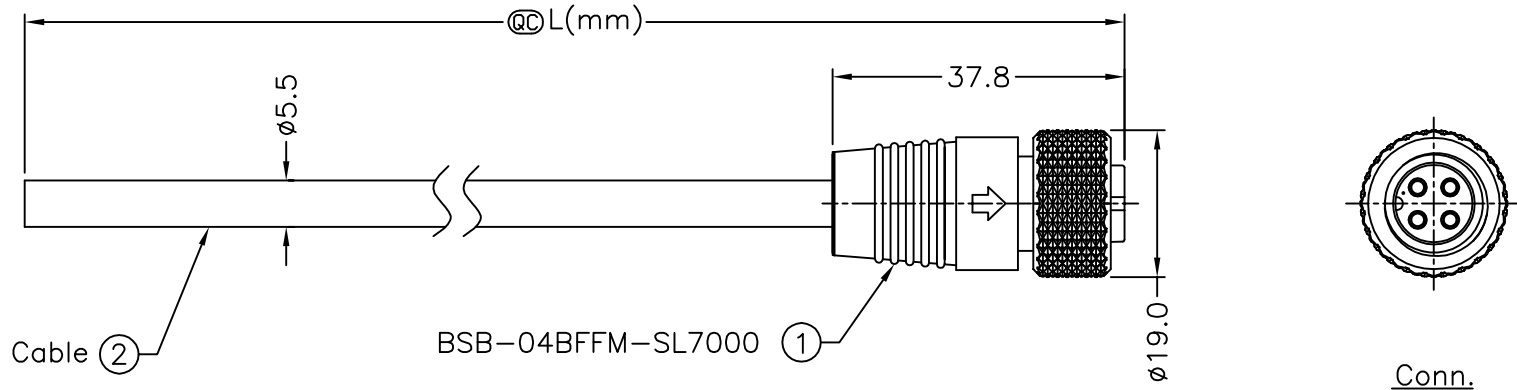


BSB-04BFFM-SL7AXX
 ↑
 XX:01~99Meter
 01:01Meter
 02:02Meters
 ⋮
 99:99Meters
 Cable Length(L):01~99Meters

- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate:IP67.
 - * Housing:Nylon+GF,Black.
 - * Female Pin:Copper Alloy,Gold Plated.
 - * Screw Nut:Copper Alloy,Nickel Plated.
 - * Shell:Copper Alloy,Nickel Plated.
 - * O-Ring:EPDM,Black.
 - * Cable:UL2464 20AWG*4C+Drain+Al/My,Black, PVC Jacket,UV Resistant,OD=5.5mm.
 - * Cable Length Tolerance: 01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm



Pin Assignments
Front View

Shield	Drain	地線
4	White	白
3	Black	黑
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
	Pin Out	



UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard	
	Cable Screw 04P F Conn F Pin	
SCALE	Free	SHEET 1 OF 1
REV. A	SIZE A4	@C :Inspection Item

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
	Vicky	2010/01/12
BSB-04BFFM-SL7AXX	Rita	2010/01/12
ALTW	Lion	2010/01/12

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

F
E
D
C
B
A