



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE3-790225	2007/09/12	WUFEI	Chang NUT
C	LEN-920132~35	2008/10/06	Li Xiu Zhi	Change Front View
D	LEN1710116~19	2017/01/17	Ruru	Change Logo

F  
E  
D  
C  
B  
A


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

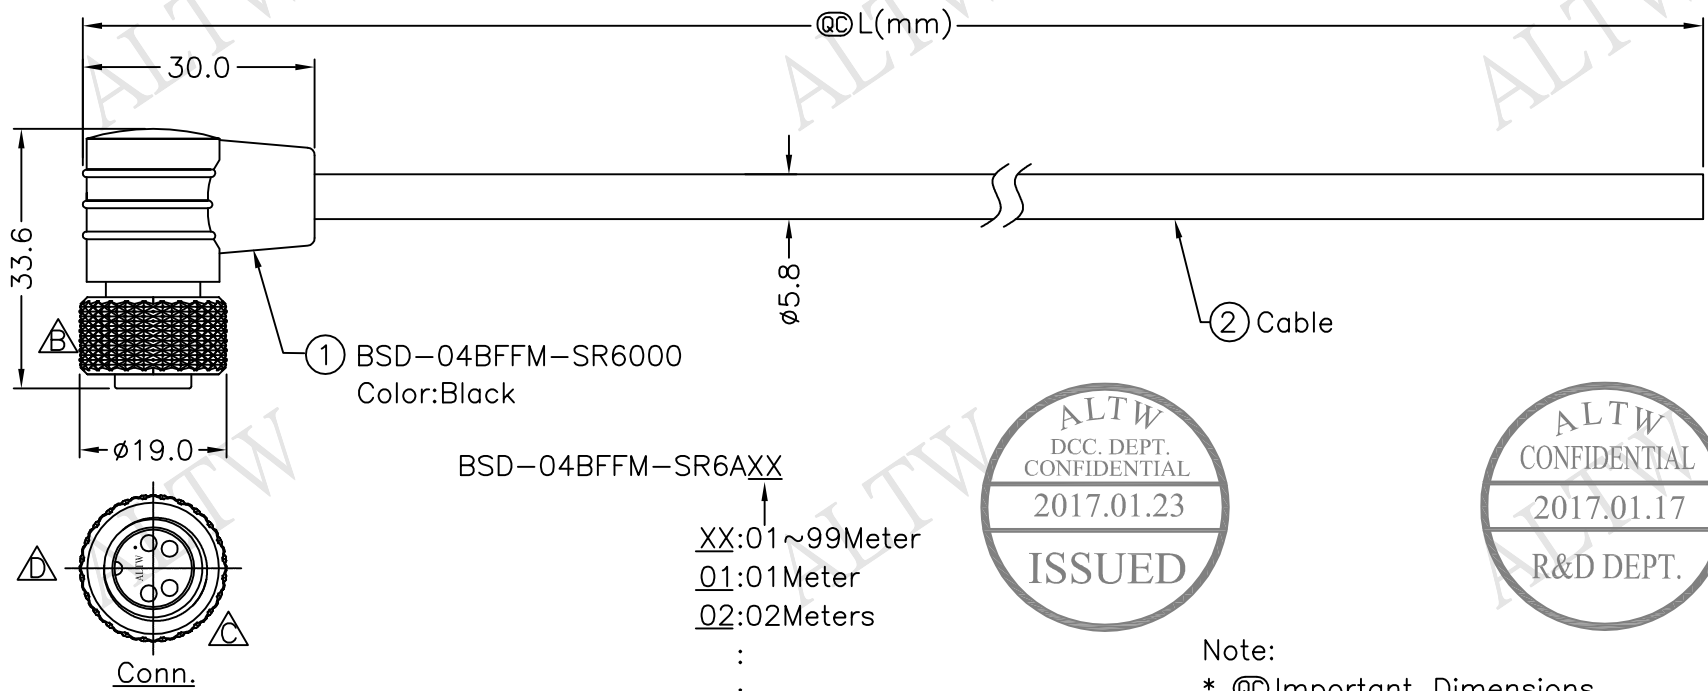

BSD-04BFFM-SR6AXX  
 XX:01~99Meter  
 01:01Meter  
 02:02Meters  
 :  
 :  
 99:99Meters  
 Cable Length(L):01~99Meters



- Note:
- \* @C Important Dimensions
  - \* Waterproof Rate: IP66
  - \* Housing: Nylon+GF,Black
  - \* Female Pin: Copper Alloy,Gold PLated
  - \* Cable: UL2464 24#\*4C+D+A, Black,PVC Jacket UV Resistant, OD=5.8
  - \* Cable Length Tolerance:01M:40mm  
 02M~05M:60mm  
 06M~10M:100mm  
 11M~30M:200mm  
 31M~99M:500mm

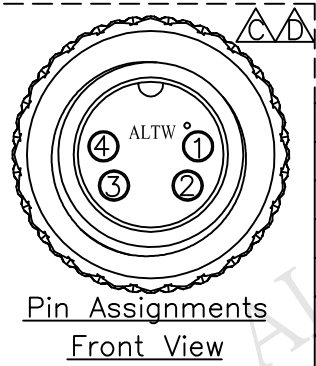

Shield	Drain	地線
4	Yellow	黃
3	Red	紅
2	Green	綠
1	White	白
Conn.	Wire Color	

Pin Out

UNIT:mm		TITLE
TOLERANCE	±0.5	Standard Cable Screw 4pin F Conn. F Pin
SCALE	Free	SHEET 1 OF 1
REV.	D	SIZE A4
		@C :Inspection Item

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
	Ruru	2017/01/17
BSD-04BFFM-SR6AXX	Rita	2017/01/17
ALTW	Max	2017/01/17