


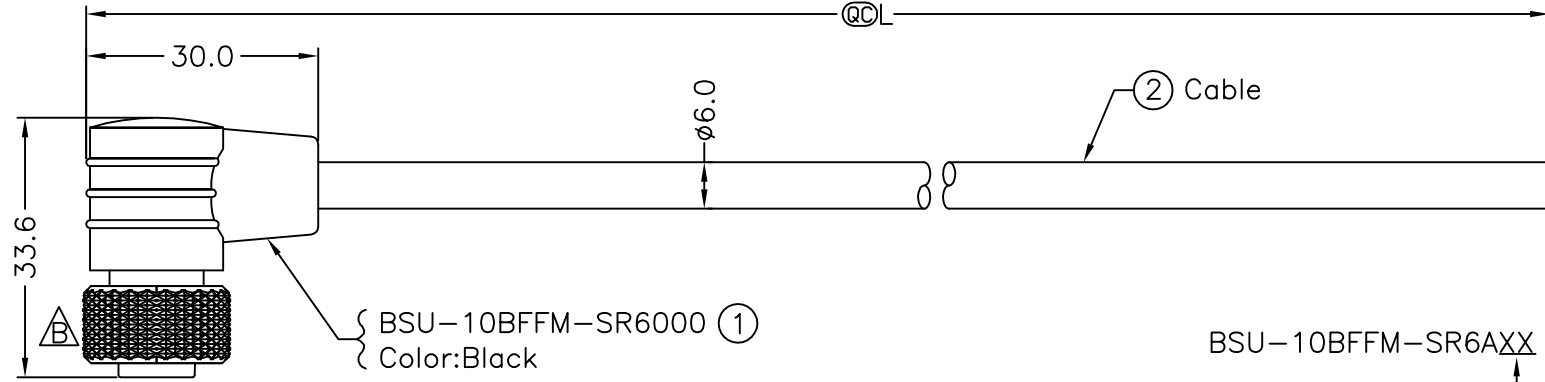


| | | | | |
|-----------|-----------------------|--------------------|---------------|---------------------------|
| REV. B | ECN NO. LEN-790231 | DATE 2007/09/13 | SIGN WUFEI | DESCRIPTION Change Nut |
| | | | | |
| | | | | |




BSU-10BFFM-SR6AXX
 ↑
 XX:01~99Meter
 01:01Meter
 02:02Meters
 ⋮
 99:99Meters
 Cable Length(L):01~99Meters



- Note:
- * @C Important Dimension.
 - * Waterproof Rate: IP66
 - * Housing:Black,Nylon+GF
 - * Pin:Copper Alloy,Gold Plated
 - * Ring:Black,EPDM
 - * Nut:Brass,Nickel Plated
 - * Inside Ring:Brass,Nickel Plated
 - * Cable: UL2464 26AWG*10C+Drain+Al/My Black,PVC Jacket UV Resistant, OD=6.0
 - * Cable Length Tolerance:1M~10M±5%mm, 11M~99M±500mm.

| Shield | Drain |
|--------|------------|
| 10 | Orange |
| 9 | Black |
| 8 | Red |
| 7 | Pink |
| 6 | Gray |
| 5 | Yellow |
| 4 | Green |
| 3 | White |
| 2 | Blue |
| 1 | Brown |
| Conn. | Wire Color |
| | Pin Out |



Pin Assignments
Front View

| | | | | | | | |
|----------------------|---------------|--|----------------------|--|-----------------------------|-----------------------|--------------------|
| UNIT:mm | | TITLE Standard Cable Screw 10Pin F Conn. F Pin | Amphenol LTW | | ITEM NO | DRAWN BY WUFEI | DATE 2007/09/13 |
| TOLERANCE ±0.5 mm | SCALE Free | SHEET 1 OF 1 | 安費諾亮泰企業股份有限公司 | | DWG NO BSU-10BFFM-SR6AXX | CHECKED BY TINA | DATE 2007/09/15 |
| REV. B | SIZE A4 | @C :Inspection Item | | | CUSTOMER ALTW | APPROVED BY VICTOR | DATE 2007/09/15 |

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.