


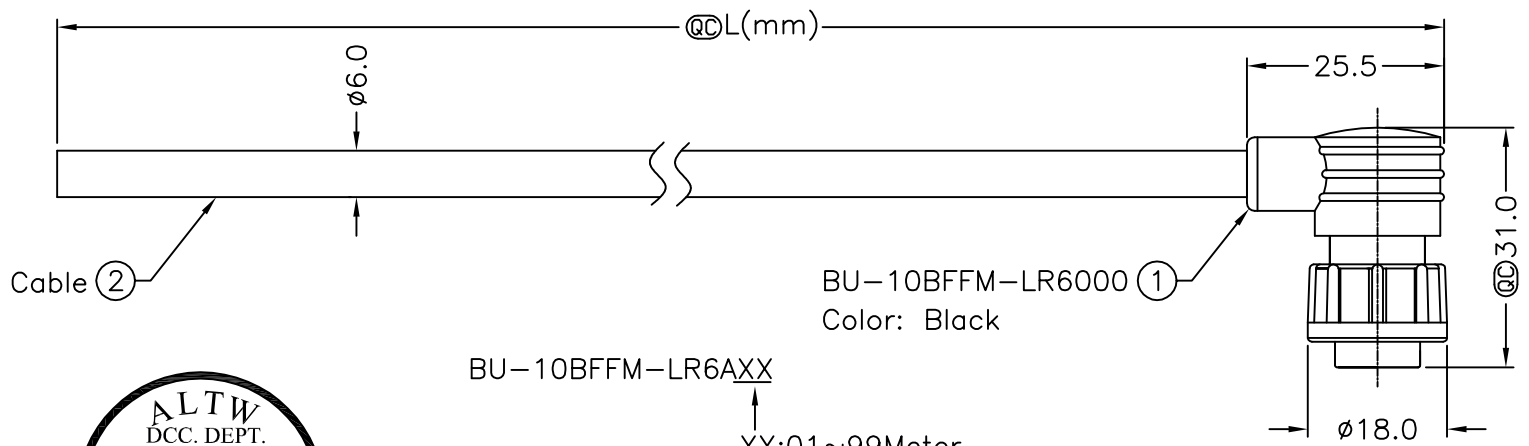


5	6	7	8
REV. B	ECN NO. LEN-050045~48	DATE 2009/12/04	SIGN Li Xiu Zhi
			DESCRIPTION Change View

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

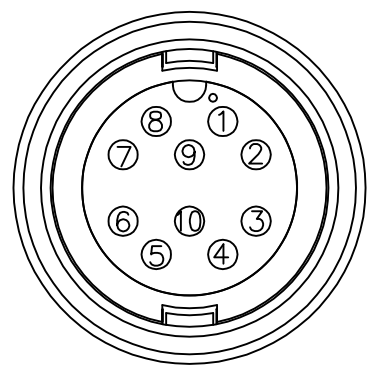

BU-10BFFM-LR6AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters



Pin Assignments
Front View

10	Orange	橙
9	Black	黑
8	Red	紅
7	Pink	粉紅
6	Gray	灰
5	Yellow	黃
4	Green	綠
3	White	白
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	

Pin Out



- Note: Conn.
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Black, Nylon+GF
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 26AWG*10C+D+Al/My PVC Jacket (UV Resistant) OD=6.0,Black
 - * Cable Length Tolerance:
 - 01M:±40mm
 - 02M~05M:±60mm
 - 06M~10M:±100mm
 - 11M~30M:±200mm
 - 31M~99M:±500mm

UNIT:mm		TITLE Standard	ITEM NO	DRAWN BY Li Xiu Zhi	DATE 2009/12/04
TOLERANCE ±0.5 mm		Molding Lock 10Pin F Conn F Pin	DWG NO BU-10BFFM-LR6AXX	CHECKED BY Ivan	DATE 2010/01/14
	SCALE Free	SHEET 1 OF 1	CUSTOMER ALTW	APPROVED BY Yitung	DATE 2010/01/14
	REV. B	SIZE A4	@C :Inspection Item		

Amphenol LTW
安費諾亮泰企業股份有限公司