


5	6	7	8
REV. B	ECN NO. LEN1650088~091	DATE 2016/05/04	SIGN Ruru
			DESCRIPTION Change Logo & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

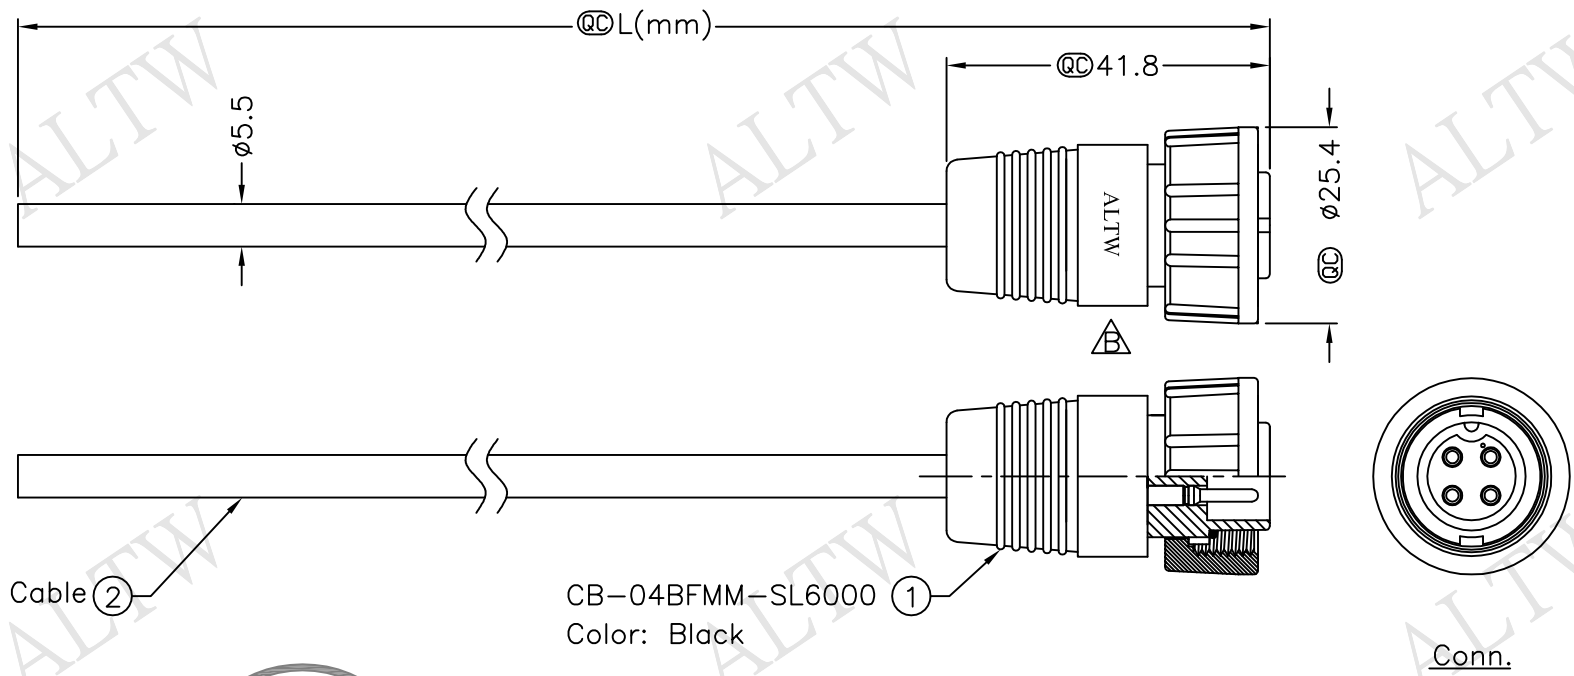

ALTW
DCC. DEPT.
CONFIDENTIAL
2016.05.11
ISSUED

ALTW
CONFIDENTIAL
2016.05.04
R&D DEPT.


CB-04BFMM-SL6000
Color: Black

CB-04BFMM-SL6AXX

XX:01~99Meter
01:01Meter
02:02Meters
⋮
99:99Meters

Cable Length(L):01~99Meters

- Note:
- * Ⓞ Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Nylon+GF,Black
 - * Pin: Copper Alloy,Gold Plated
 - * Cable: UL2464 20AWG*4C+D+AL/My Black,PVC Jacket UV Resistant, OD=5.5
 - * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm



Pin Assignments
Front View

4	White
3	Black
2	Blue
1	Brown
Conn	Wire Color
	Pin Out

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE Middle, Cable Screw 4Pin F Conn M Pin	
SCALE Free	SHEET 1 OF 1
REV. B	SIZE A4
Ⓞ :Inspection Item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	CB-04BFMM-SL6AXX
CUSTOMER	ALTW

DRAWN BY	Ruru	DATE	2016/05/04
CHECKED BY	Rita	DATE	2016/05/04
APPROVED BY	Lisa	DATE	2016/05/04

1
F
E
D
C
B
A

2
3

4
5

6

7

8
8 FMW0702-01-01A2