



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2010/10/15	Jimmy	Rev.01 Changed To Rev.A
B	LEN1480569~572	2014/08/22	Vicky	Update Logo




Conn.

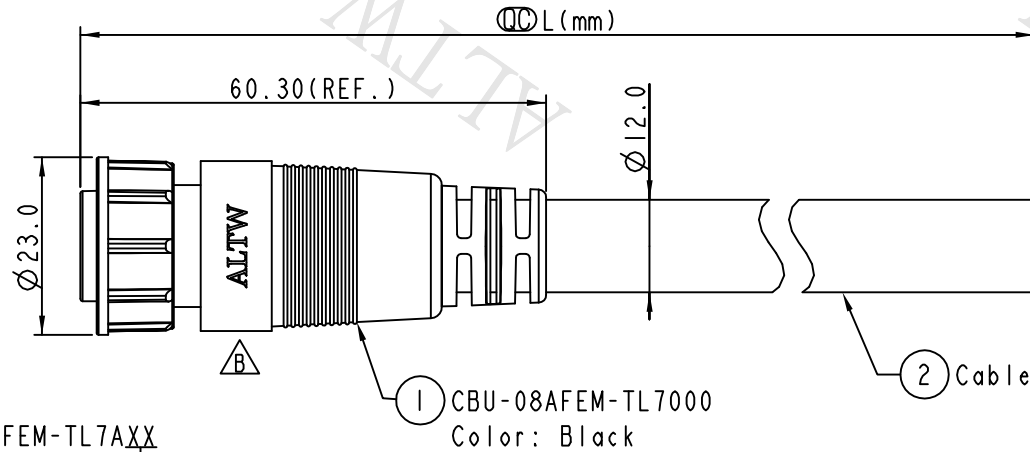

CBU-08AFEM-TL7AXX

- XX : 01~99Meters
- 01 : 01Meter
- 02 : 02Meters
- ...
- 99 : 99Meters

Cable Length(L): 01~99Meters

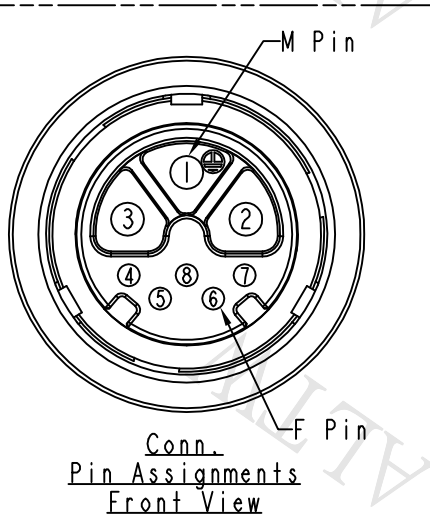

Pin	Wire Color	Wire Color	Pin Out
8	Drain	24AWG	地線
7	Green	24AWG	綠
6	White/Green	24AWG	白/綠
5	Orange	24AWG	橘
4	White/Orange	24AWG	白/橘
3	Blue	16AWG	藍
2	Brown	16AWG	棕
1	Green/Yellow	16AWG	綠/黃
Conn.			

Twist
對線
Twist
對線

Note:

- * \varnothing Important Dimension To Check
- * Waterproof Rate: IP67
- * Housing: Nylon+GF, Black
- * Pin: Copper Alloy, Gold Plated
- * Lock Nut: Nylon+GF, Black
- * O-Ring: EPDM, Black
- * Cable: UL2464 (24AWG*2P+D+Al/My)+16AWG*3C+F+P, Black, PVC Jacket, UV Resistant, OD=12.0
- * Cable Length Tolerance:
 - 01M: ±40mm
 - 02M~05M: ±60mm
 - 06M~10M: ±100mm
 - 11M~30M: ±200mm
 - 31M~99M: ±500mm

UNIT: mm
TOLERANCE
±0.5 mm

TITLE
HyBrid Cable, Middle, 3Key
3MPin(10A)+5FPin(2A)
SCALE 1:1
SIZE A4
SHEET 1 OF 1
REV. B
WC-REV. A.1
 \varnothing : Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO	CUSTOMER	DRAWN BY	CHECKED BY	APPROVED BY	DATE
	CBU-08AFEM-TL7AXX	ALTW	Vicky	Sam	Rita	2014-08-22

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.