
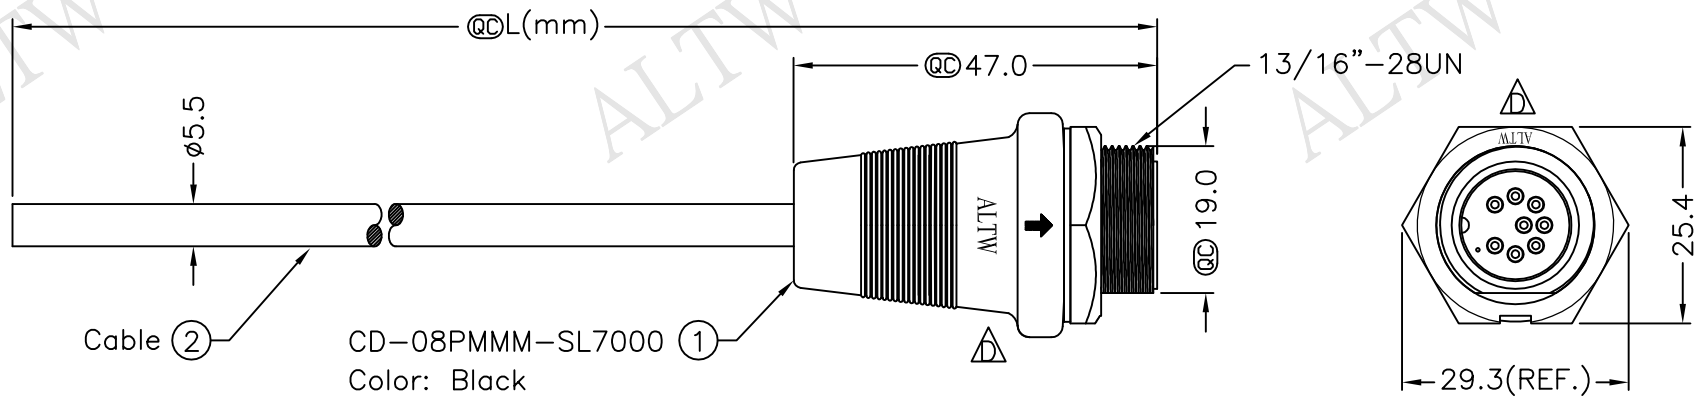


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B		03/02/2007	Ivan	Revise Color Designation For Pin Out
C	LEN-8B0124~127	2008/09/25	Shin	Add Note
D	LEN1650044~047	2016/04/28	Ruru	Change Logo & Note



Cable ② CD-08PMMM-SL7000 ①  
Color: Black


CD-08PMMM-SL7AXX

- XX:01~99Meter
- 01:01Meter
- 02:02Meters
- ...
- 99:99Meters


Cable Length(L):01~99Meters

Note:

- \* @C Important Dimensions To Check.
- \* Waterproof Rate: IP67
- \* Housing: Nylon+GF,Black
- \* Male Pin: Copper Alloy,Gold Plated
- \* Cable: UL2464 24AWG\*8C+D+AL/My Black,PVC Jacket UV Resistant, OD=5.5
- △\* Use with waterproof cap or dust cap  
Panel Thickness Max: 1.2mm
- △\* Use without waterproof cap or dust cap  
Panel Thickness Max: 2.0mm
- △\* Cable Length Tolerance: 01M: ±40mm  
02M~05M: ±60mm  
06M~10M: ±100mm  
11M~30M: ±200mm  
31M~99M: ±500mm

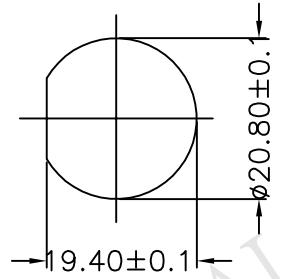

Recommended Panel Cut-Out



Pin Assignments Front View

8	Green	綠	△
7	Yellow	黃	△
6	Orange	橘	△
5	Red	紅	△
4	Blue	藍	△
3	White	白	△
2	Brown	棕	△
1	Black	黑	△
Conn.	Wire Color		
	Pin Out		

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE Middle, Cable Screw 8Pin M Conn M Pin	
SCALE Free	SHEET 1 OF 1
REV. D	SIZE A4
@C :Inspection Item	

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	CD-08PMMM-SL7AXX
CUSTOMER	ALTW

DRAWN BY	Ruru
CHECKED BY	Rita
APPROVED BY	Lisa

DATE	2016/04/28
DATE	2016/04/28
DATE	2016/04/28

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.