





REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2012/08/06	Jason Jiang	Change Rev.01 To Rev.A
B	LEN1520101~04	2015/01/29	Ruru	Change Logo

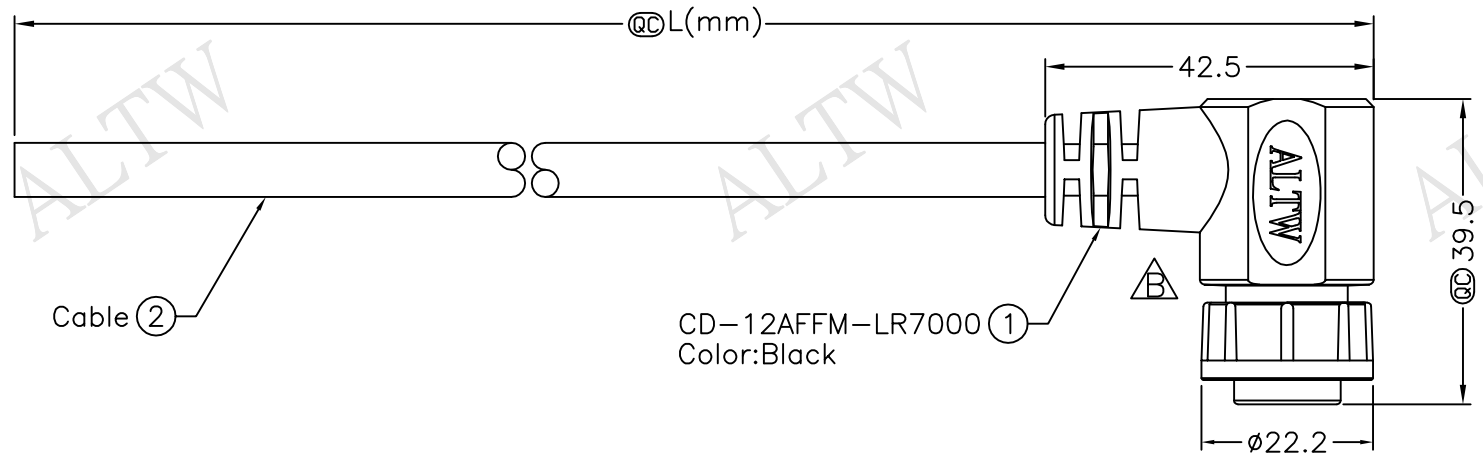

CD-12AFFM-LR7AXX  
 XX:01~99Meter  
 01:01Meter  
 02:02Meters  
 ...  
 99:99Meters  
 Cable Length(L):01~99Meters



- Note:
- \* @Important Dimension To Check.
  - \* Waterproof Rate: IP67.
  - \* Connector: Nylon+GF, Black.
  - \* Female Pin: Copper Alloy, Gold Plated.
  - \* Lock Nut: Nylon+GF, Black.
  - \* O-Ring: EPDM,Black.
  - \* Cable: UL2464 24AWG\*12C+Drain+Al/My, PVC Jacket, UV Resistant, OD=7.0, Black.
  - \* Cable Length Tolerance: 01M:±40mm  
 02M~05M:±60mm  
 06M~10M:±100mm  
 11M~30M:±200mm  
 31M~99M:±500mm

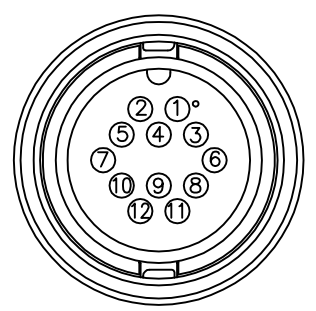

Pin Assignments  
Front View

Light Green	淺綠	12
Purple	紫	11
Orange	橙	10
Black	黑	9
Red	紅	8
Pink	粉紅	7
Gray	灰	6
Yellow	黃	5
Green	綠	4
White	白	3
Blue	藍	2
Brown	棕	1
	Wire Color	Conn.
	Pin Out	

UNIT:mm	TITLE Middle	
TOLERANCE ±0.5mm	Cable Lock 12P F Conn F Pin	
	SCALE Free	SHEET 1 OF 1
REV. B	SIZE A4	@ :Inspection Item

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2015/01/29
DWG NO CD-12AFFM-LR7AXX	CHECKED BY Rita	DATE 2015/01/29
CUSTOMER ALTW	APPROVED BY Win	DATE 2015/01/29

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

F  
E  
D  
C  
B  
A

1 2 3 4 5 6 7 8