




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2012/08/06	Jason Jiang	Change Rev.01 To Rev.A
B	LEN1520106~09	2015/01/29	Ruru	Change Logo

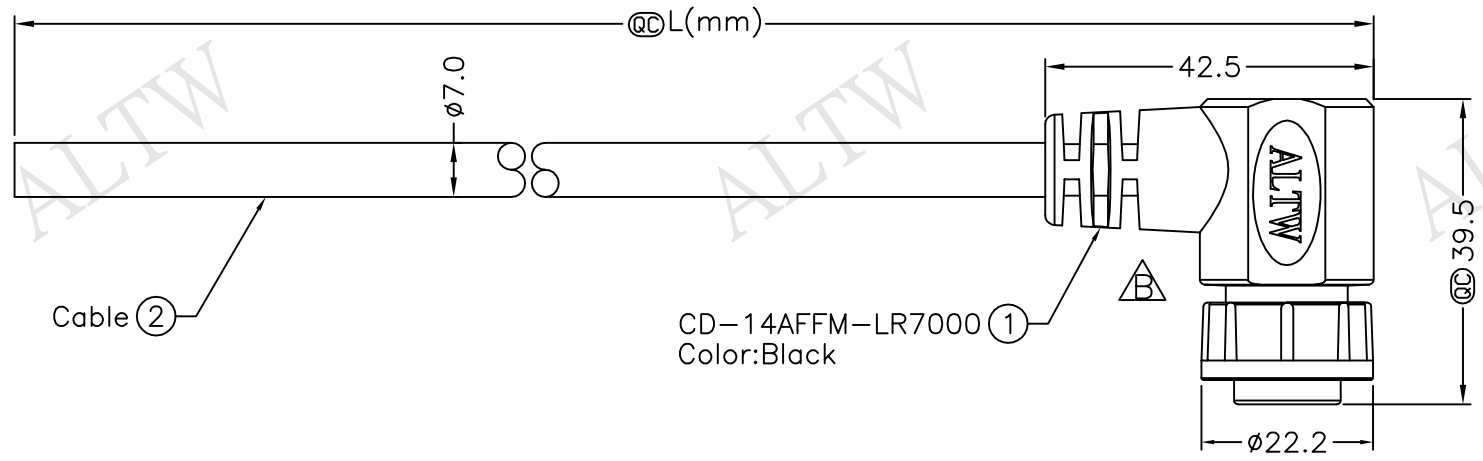

CD-14AFFM-LR7AXX

- XX:01~99Meter
- 01:01Meter
- 02:02Meters
- ...
- 99:99Meters


Cable Length(L):01~99Meters



Conn.

Note:

- \* @Important Dimension To Check.
- \* Waterproof Rate: IP67.
- \* Connector: Nylon+GF, Black.
- \* Female Pin: Copper Alloy, Gold Plated.
- \* Lock Nut: Nylon+GF, Black.
- \* O-Ring: EPDM, Black.
- \* Cable: UL2464 24AWG\*14C+Drain+Al/My, PVC Jacket, UV Resistant, OD=7.0, Black.
- \* Cable Length Tolerance:
  - 01M: ±40mm
  - 02M~05M: ±60mm
  - 06M~10M: ±100mm
  - 11M~30M: ±200mm
  - 31M~99M: ±500mm



Pin Assignments Front View

Brown/White	棕/白	14
Black/White	黑/白	13
Light Green	淺綠	12
Purple	紫	11
Orange	橙	10
Black	黑	9
Red	紅	8
Pink	粉紅	7
Gray	灰	6
Yellow	黃	5
Green	綠	4
White	白	3
Blue	藍	2
Brown	棕	1
Wire Color		Conn.
Pin Out		

UNIT:mm	TITLE Middle	
TOLERANCE ±0.5mm	Cable Lock 14P F Conn F Pin	
SCALE Free	SHEET 1 OF 1	
REV. B	SIZE A4	QC :Inspection Item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2015/01/29
DWG NO CD-14AFFM-LR7AXX	CHECKED BY Rita	DATE 2015/01/29
CUSTOMER ALTW	APPROVED BY Win	DATE 2015/01/29

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

F  
E  
D  
C  
B  
A

1 2 3 4 5 6 7 8