



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LF3-940109~112	2009/04/14	ZhaoRongFu	Update The Drawing
C	LEN1370206~209	2013/06/25	Ruru	Modify the SR & Change Logo

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

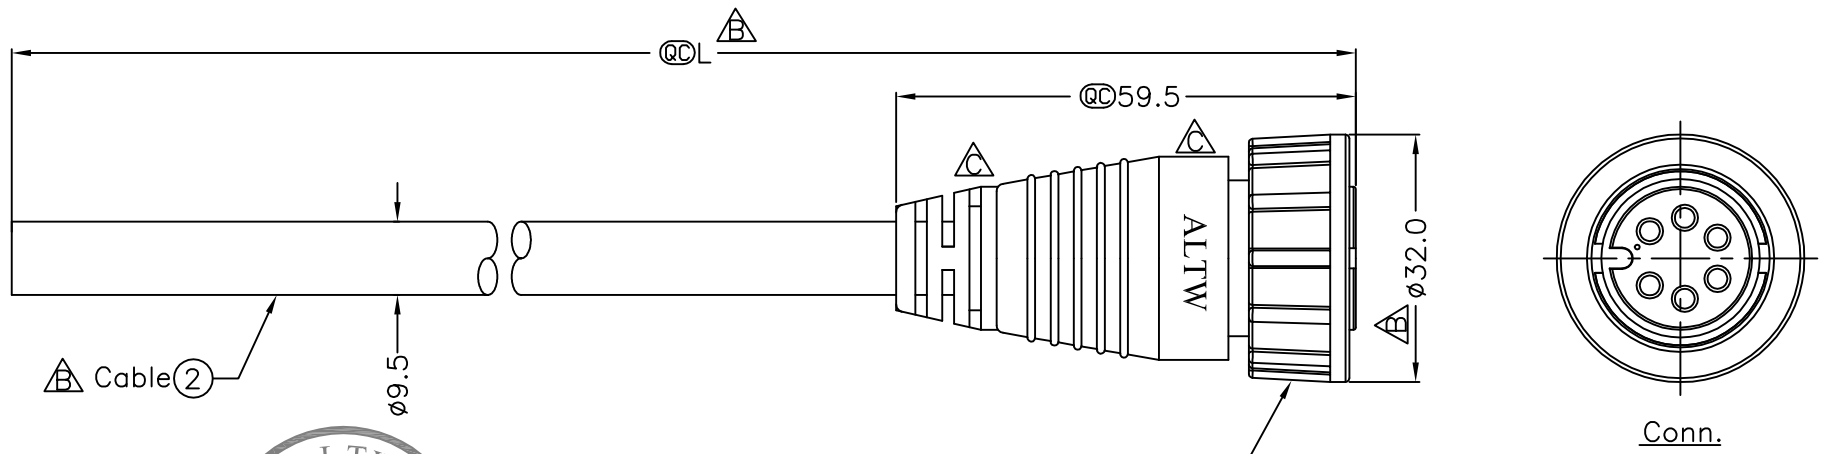


DC-06AFFM-SL7000 ①
Color:Black



DC-06AFFM-SL7AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 ...
 99:99Meters
 Cable Length(L):01~99Meters

- Note:
- * @Q Important Dimension
 - * Waterproof Rate: IP67
 - * Connector: Nylon+GF, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 16AWG*6C+Filler+D+AL/My, PVC Jacket(UV Resistance), OD9.5mm, Black
 - * Cable Length Tolerance: 01M:±40mm
 02M~05M:±60mm
 06M~10M:±100mm
 11M~30M:±200mm
 31M~99M:±500mm

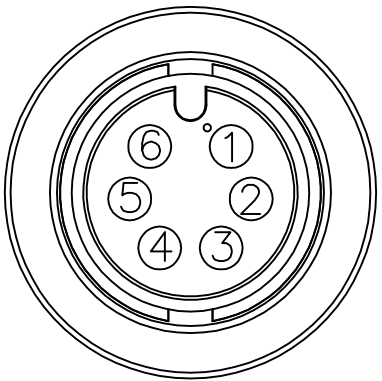

Pin Assignments
Front View 前視圖

Gray	灰	6
Yellow	黃	5
Green	綠	4
White	白	3
Blue	藍	2
Brown	棕	1
Wire Color		Conn.
Pin Out		

UNIT:mm		TITLE Large Cable Screw 6P F Conn F Pin	Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Ruru	DATE 2013/06/25
TOLERANCE ±0.5mm	SCALE Free	SHEET 1 OF 1		DWG NO DC-06AFFM-SL7AXX	CHECKED BY Vicky	DATE 2013/06/25
REV. C	SIZE A4	@Q :Inspection Item		CUSTOMER ALTW	APPROVED BY Maslow	DATE 2013/06/25