


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1380294~297	2013/08/20	Ruru	Change Logo & Modify Note
C	C200914	2020/06/16	Ruru	△ X3

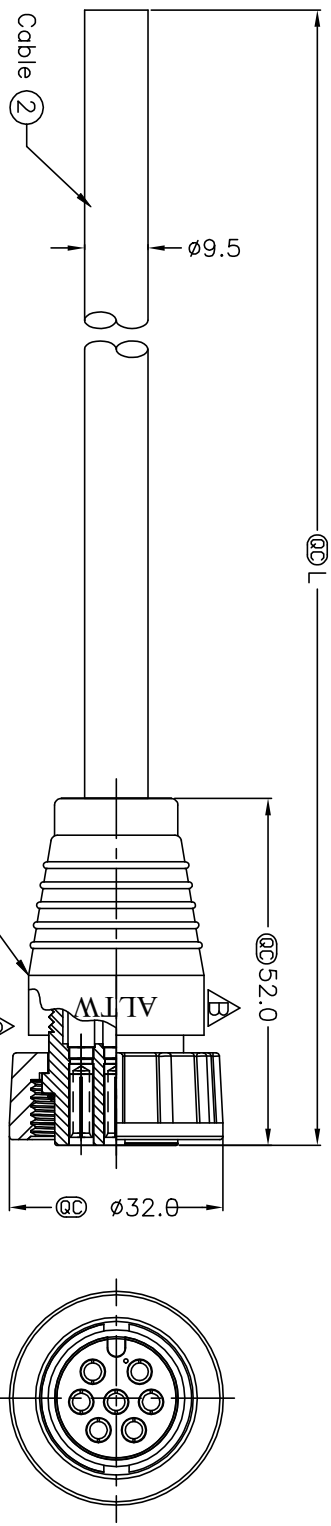

DC-07BFFM-SL6AXX

DC-07BFFM-SL6000  
Color: Black


XX:01~99Meter  
01:01Meter  
02:02Meters  
...

99:99Meters  
Cable Length(L):01~99 Meter

Conn.


△ Note:

- \* ①Important Dimension.
- \* Waterproof Rate: IP66
- \* Housing: Thermoplastic, Black
- \* Female Pin: Copper Alloy, Gold Plated
- \* O-Ring: Rubber, Black
- \* Screw Nut: Thermoplastic, Black
- \* Cable: UL2464 16AWG\*7C+D+AL/My  
UV Resistant OD=9.5mm, Black
- \* Cable Length Tolerance: 01M:40mm  
02M~05M:60mm  
06M~10M:100mm  
11M~30M:200mm  
31M~99M:500mm



Pin Assignments  
Front View 前视图

Red	缸	7
Gray	灰	6
Yellow	黄	5
Green	绿	4
White	白	3
Blue	蓝	2
Brown	棕	1
Wire Color		Conn.
Pin Out		



UNIT:mm	TITLE	SCALE	REV.	SIZE	SHEET	OF	ITEM NO	DWG NO	CUSTOMER	DRWIN BY	CHECKED BY	DATE
±0.5 mm	0 CERES, D-20A, 07P, CABLE W/0 SR F, F, MOLDING, SCREW	1 : 1	C	A4	1	1	安費諾亮泰企業股份有限公司	DC-07BFFM-SL6AXX	ALTW	Ruru	Vicky	2013/08/20
										Rita		2013/08/20