



REV. B	ECN NO. LEN1150097~100	DATE 2011/04/22	SIGN Ruru	DESCRIPTION Modify Nut View.
--------	------------------------	-----------------	-----------	------------------------------

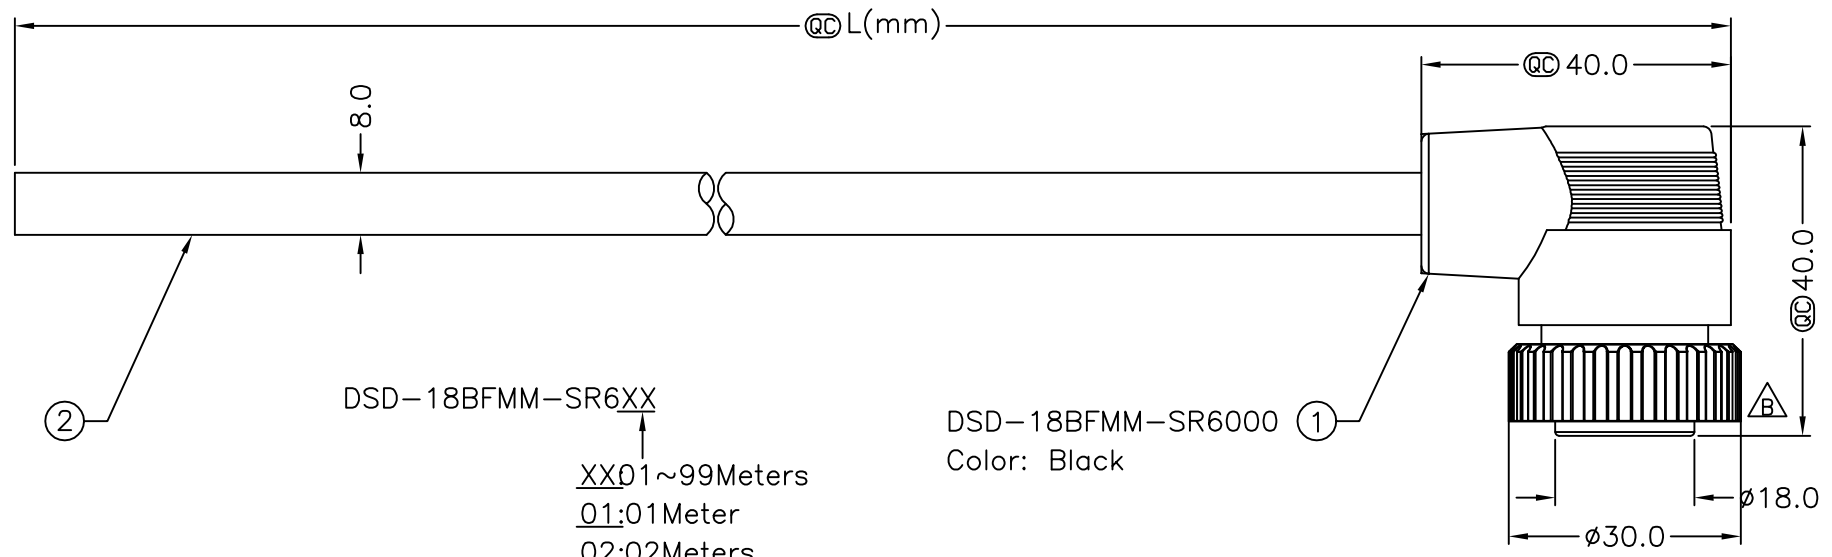




DSD-18BFMM-SR6XX
 XX01~99Meters
 01:01Meter
 02:02Meters
 :
 :
 99:99Meters
 Cable Length(L):01~99Meters

DSD-18BFMM-SR6000
 Color: Black

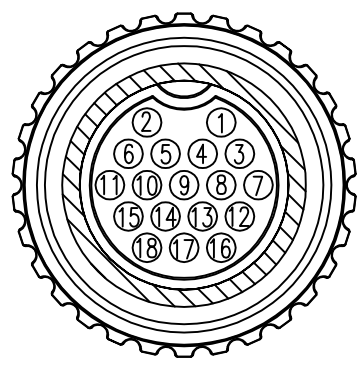

Pin Assignments
Front View

9	Black	18	Blue/White
8	Red	17	Green/White
7	Pink	16	Orange/White
6	Grey	15	Red/White
5	Yellow	14	Brown/White
4	Green	13	Black/White
3	White	12	Light Green
2	Blue	11	Purple
1	Brown	10	Orange
Conn.	Wire Color	Conn.	Wire Color
Pin Out		Pin Out	



- Note:
- * @C Important Dimension To Check.
 - * Waterproof Rate: IP66
 - * Housing: Black, Nylon+GF
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: UL2464 24AWG+18C+Drain+Al/My Black, PVC Jacket (UV Resistant) OD=8.0mm
 - * Cable Length Tolerance: 1M±5%mm, 11M~99M±500mm.

UNIT:mm		TITLE Large Cable Screw 18Pin F Conn M Pin	Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO	DRAWN BY Ruru	DATE 2011/04/22
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1	REV. B		DWG NO DSD-18BFMM-SR6AXX	CHECKED BY Rita	DATE 2011/04/22
1	2	3	4	5	CUSTOMER ALTW	APPROVED BY Luke	DATE 2011/04/22

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.