
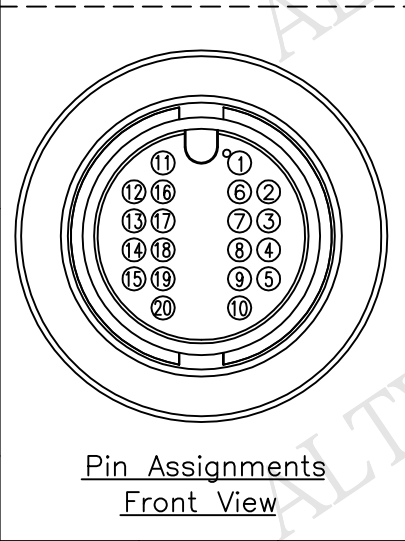




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-050078~81	2009/12/29	Li Xiu Zhi	Change View
C	LEN15C0544~47	2015/12/16	Ruru	Change Logo

1 2 3 4 5 6 7 8

F
E
D
C
B
A

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

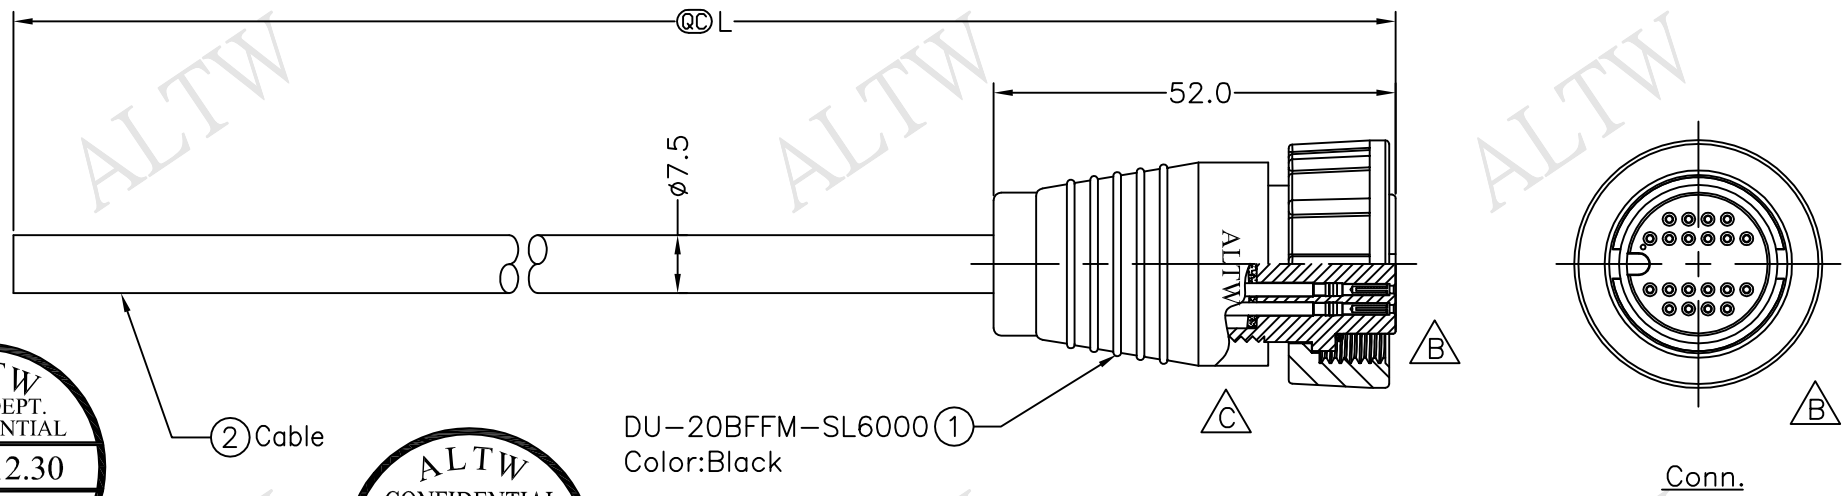

White 白	10	Red/Black 紅/黑	20
Gray 灰	9	Purple/White 紫/白	19
Purple 紫	8	Blue/White 藍/白	18
Blue 藍	7	Green/White 綠/白	17
Green 綠	6	Orange/White 橙/白	16
Yellow 黃	5	Red/White 紅/白	15
Orange 橙	4	Brown/White 棕/白	14
Red 紅	3	Black/White 黑/白	13
Brown 棕	2	Light Green 淺綠	12
Black 黑	1	Pink 粉紅	11
Wire Color	Conn.	Wire Color	Conn.
Pin Out		Pin Out	

XX:01~99Meter
01:01Meter
02:02Meters
:
99:99Meters

Cable Length(L):01~99Meters

- Note:
- * @@ Important Dimensions To Check.
 - * Waterproof Rate: IP66
 - * Housing:Nylon+GF, Black
 - * Female Pin: Copper Alloy,Gold Plated
 - * O-Ring:EPDM,Black
 - * Screw Nut:Nylon+GF,Black
 - * Cable:UL2464 26AWG*22C+Drain+AL.Mylar PVC Jacket UV Resistant, OD=7.5mm,Black
 - * Cable Length Tolerance:01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm		TITLE Large,Cable Screw 20Pin F Conn F Pin	<h1>Amphenol LTW</h1> <p>安費諾亮泰企業股份有限公司</p>	ITEM NO	DRAWN BY Ruru	DATE 2015/12/16
TOLERANCE ±0.5mm	SCALE Free	SHEET 1 OF 1		DWG NO DU-20BFFM-SL6AXX	CHECKED BY Rita	DATE 2015/12/16
REV. C	SIZE A4	QC :Inspection Item		CUSTOMER ALTW	APPROVED BY Lisa	DATE 2015/12/16

1 2 3 4 5 6 7 8 FMW10702-01-01A2