


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
|------|----------------|------------|---------|------------------|
| C | LEN1510259~262 | 2015/01/06 | Sam | Update logo |
| D | C190818 | 2019/05/27 | Cynthia | Update the note |
| E | C210637 | 2021/05/04 | Vicky | $\triangle E$ X8 |

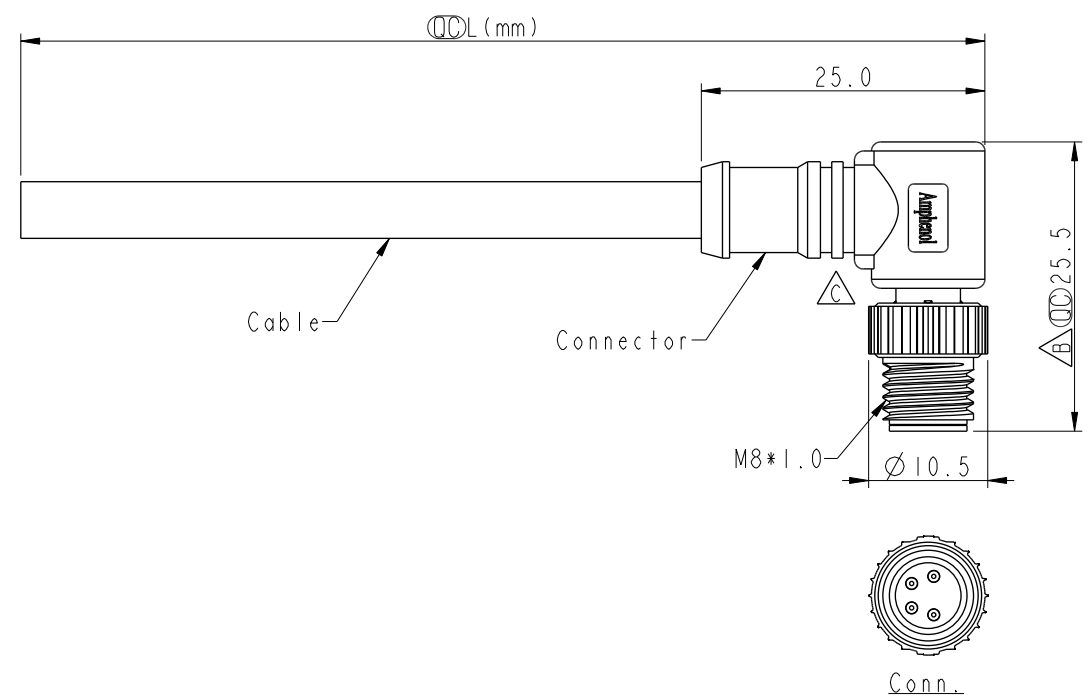

- $\triangle E$ Note:
- * RoHS Compliant
 - * \circledast Important dimension
 - * Waterproof rate: IPX7, mated
 - * Connector
 - Housing: Thermoplastic, Black
 - $\triangle C$ Pin: Copper alloy, Gold plated
 - Nut: Metal
 - Outer mold: Thermoplastic, Black
 - * Cable: UL2464, PVC Jacket, Black
 - $\triangle B$ * Cable length tolerance: 1M: +50/-0 mm
 - 1M < L \leq 3M: +100/-0 mm
 - 3M < L \leq 5M: +150/-0 mm
 - 5M < L \leq 10M: \pm 100 mm
 - 10M < L \leq 20M: \pm 200 mm
 - 20M < L \leq 30M: \pm 300 mm
 - 30M < L \leq 99M: \pm 500 mm

| | | | | |
|---------------------------|----------------|---------------------------------|---|-----------------------------|
| UNIT: mm | | | TITLE O SEN, M8 CABLE W/O SR, M, M, MOLDING | $\triangle B$ $\triangle E$ |
| TOLERANCE ± 0.5 mm | SCALE 3:2 | SIZE A4 | SHEET 1 OF 2 | REV. E |
| | WC-REV. A.1 | \circledast : Inspection item | | |

Amphenol LTW
安費諾亮泰企業股份有限公司

| | | |
|--|---------------------|--------------------|
| ITEM NO. | DRAWN BY Cynthia | DATE 2019-05-27 |
| DWG NO. $\triangle E$ 8-XXBMMM-SR7AXX | CHECKED BY Wen | DATE 2019-05-27 |
| CUSTOMER ALTW | APPROVED BY Neo | DATE 2019-05-27 |

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

| | | | |
|----------|----------|-----|-----------------|
| 4P | 5.0 | 22 | 8-04BMMM-SR7AXX |
| 3P | | | 8-03BMMM-SR7AXX |
| Contacts | Cable OD | AWG | Item No. |

△E
8-XXBMMM-SR7AXX

XX: No. Of Pin

XX: 01~99Meters
 01: 01Meter
 02: 02Meters
 :
 99: 99Meters

| | | | | | | |
|---------|-------|-------|---|-------|-------|---|
| Pin Out | 4 | Black | 黑 | 4 | Black | 黑 |
| | 3 | Blue | 藍 | 3 | Blue | 藍 |
| | 1 | Brown | 棕 | 2 | White | 白 |
| | | | | 1 | Brown | 棕 |
| | Pin # | Wire | | Pin # | Wire | |
| Conn. | | | | | | |
| | 3P | | | 4P | | |

△E Pin Assignments Front View

| | | | | |
|-----------|--------|-------|--|-------------|
| UNIT:mm | | TITLE | O SEN, M8 CABLE W/O SR, M, M, MOLDING | |
| TOLERANCE | ±0.5mm | SCALE | 3:2 | SIZE A4 |
| | | REV. | E | WC-REV. A.1 |
| | | SHEET | 2 | OF 2 |
| | | QC | Inspection item | |

Amphenol LTW
 安費諾亮泰企業股份有限公司

| | | | | | |
|----------|--------------------|-------------|---------|------|------------|
| ITEM NO | 8-XXBMMM-SR7AXX | DRAWN BY | Cynthia | DATE | 2019-05-27 |
| DWG NO | △E 8-XXBMMM-SR7AXX | CHECKED BY | Wen | DATE | 2019-05-27 |
| CUSTOMER | ALTW | APPROVED BY | Neo | DATE | 2019-05-27 |