




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION

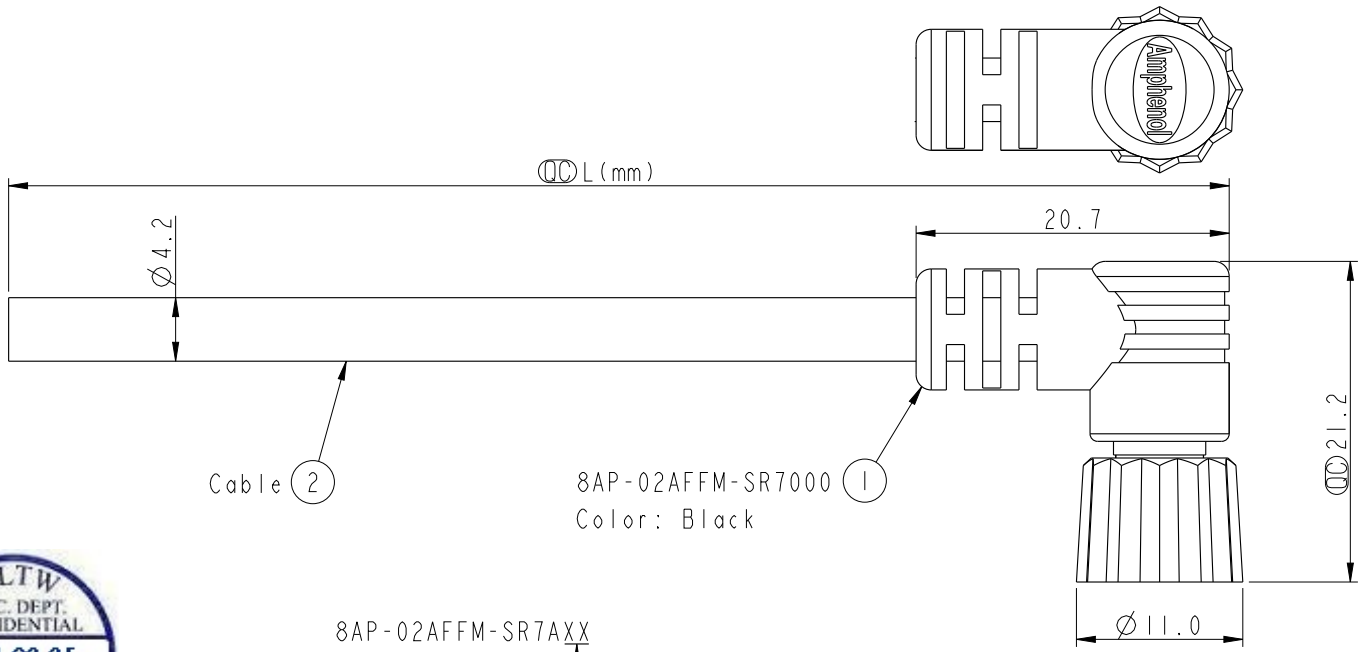


Cable ②  
 8AP-02AFFM-SR7000 ①  
 Color: Black

8AP-02AFFM-SR7AXX  
 XX: 01~99Meters  
 01: 01Meter  
 02: 02Meter  
 ...  
 99: 99Meters  
 Cable Length(L): 01~99Meters



Conn.

- Note:
- \* Ⓞ Important Dimension.
  - \* Waterproof Rate: IP67.
  - \* Connector: PU, Black.
  - \* Female Pin: Copper Alloy, Gold Plated.
  - \* Screw Nut: Nylon+GF, Black.
  - \* O-Ring: Viton, Green.
  - \* Cable: UL2464 22AWG\*2C+Talcum, PVC Jacket, UV Resistant, OD=4.2, Black.
  - \* Cable Length Tolerance: 01M: ±40mm  
 02~05M: ±60mm  
 06~10M: ±100mm  
 11~30M: ±200mm  
 31~99M: ±500mm



Pin Assignments  
 Front View

Pin	Wire Color
2	Red 紅
1	Black 黑
Conn.	Wire Color

Pin Out

UNIT:mm		TITLE	M8 2Pin Cable F Conn. F Pin	
TOLERANCE		SCALE	SIZE	SHEET
±0.5 mm		2:1	A4	1 OF 1
REV.	WC-REV.	Ⓞ: Inspection item		
A	A.2			

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Mila	2014-01-09
DWG NO	CHECKED BY	DATE
8AP-02AFFM-SR7AXX	Jimmy	2014-01-09
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2014-01-09