
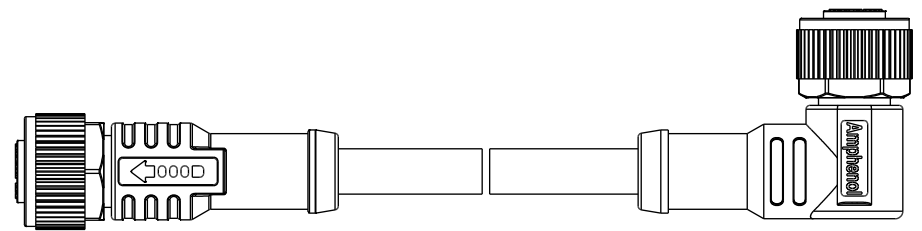
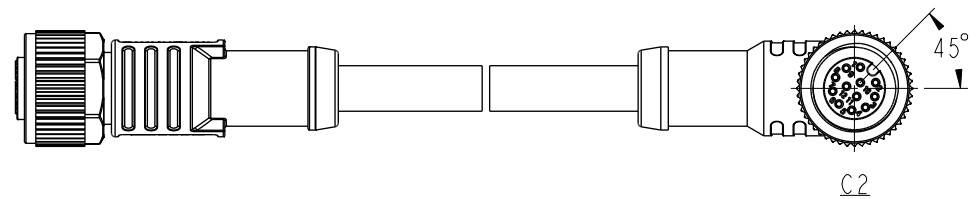


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201748	2020/11/09	Ruru	$\triangle B$ X5
C	C210230	2021/04/01	Vicky	$\triangle C$ X4

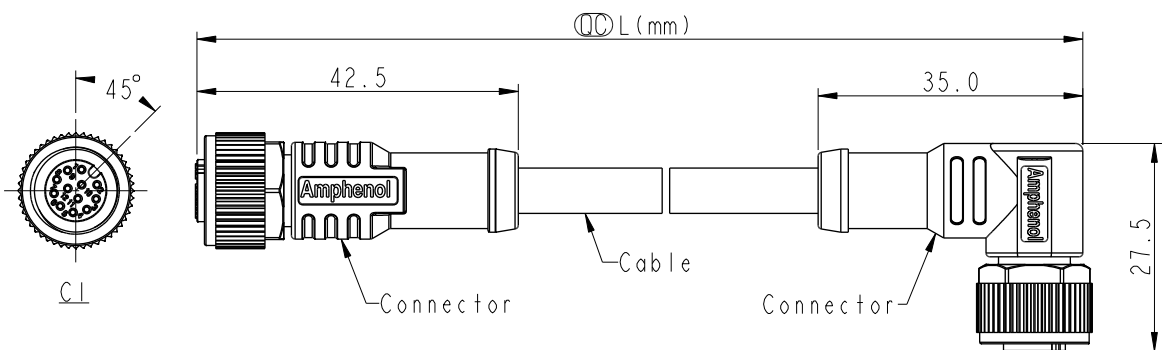

Note:

- \* RoHS Compliant
- \*  $\circ$  Important dimension
- \* C1  
Waterproof rate: IPX8, mated 1m/24h  
IPX9K, mated  
Housing: Thermoplastic, Black  
Pin: Copper alloy, Gold plated  
O-Ring: Rubber, Green  
Nut: Thermoplastic, Black  
Outer Mold: Thermoplastic, Black
- \* C2  
Waterproof rate: IPX8, mated 1m/24h  
IPX9K, mated  
Housing: Thermoplastic, Black  
Pin: Copper alloy, Gold plated  
O-Ring: Rubber, Green  
Nut: Thermoplastic, Black  
Outer Mold: Thermoplastic, Black  
Cable: UL20549, PUR Jacket, Black
- \* Cable Length Tolerance:
 

0.5M < L ≤ 1M	+60/-0 mm
1M < L ≤ 3M	+120/-0 mm
3M < L ≤ 5M	+160/-0 mm
5M < L ≤ 10M	±100 mm
10M < L ≤ 20M	±200 mm
20M < L ≤ 30M	±300 mm
30M < L ≤ 99M	±500 mm

UNIT: mm		TITLE	ACC, SEN, A Code, DB-ENDED FF
TOLERANCE	±0.5mm	SCALE	1:2
		SIZE	A4
		SHEET	1 OF 2
		REV.	C
		WC-REV.	
		$\circ$	Inspection item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY	DATE
	Ruru	2018-12-05
DWG NO.	CHECKED BY	DATE
$\triangle B$ MSAPXXFL-SAPFR-SBXXX	Rita	2018-12-05
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2018-12-05

