


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
F	C201607	2020/10/16	Vicky	$\triangle F$ X4
G	C210081	2021/01/19	Vicky	$\triangle G$ X1
H	C210429	2021/03/26	Vicky	$\triangle H$ X4

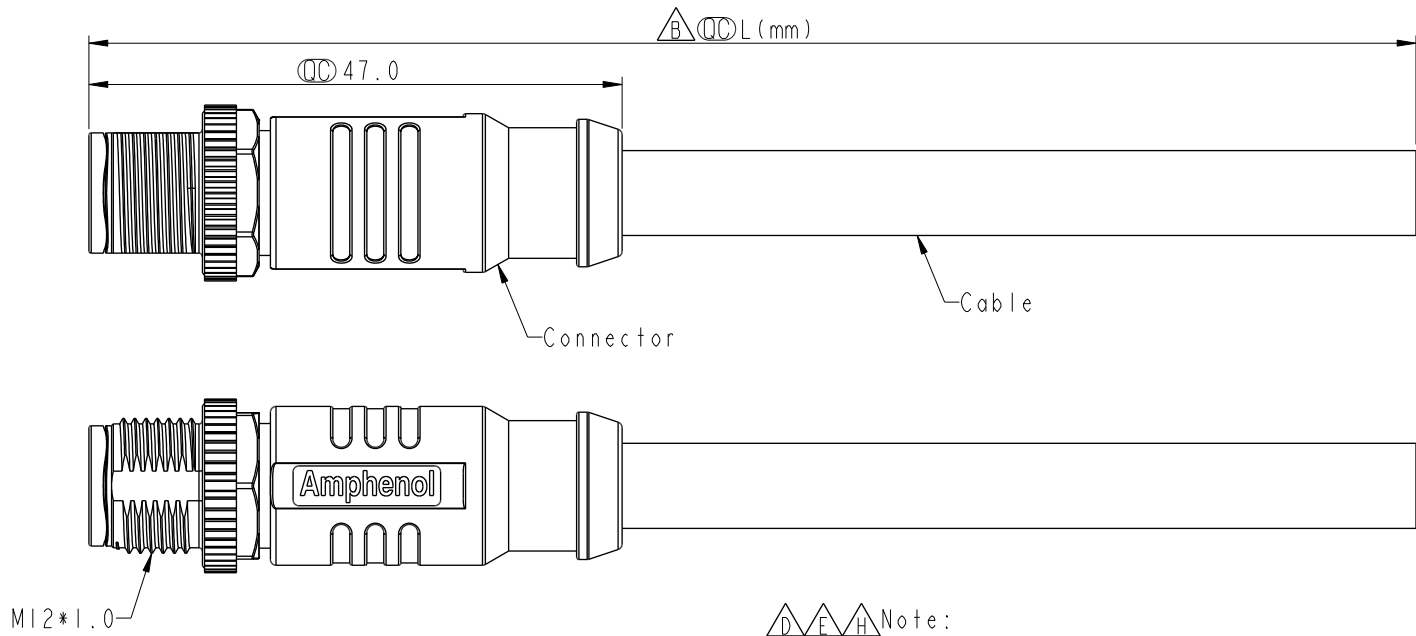

- $\triangle D \triangle E \triangle H$ Note:
- * RoHS Compliant
 - * CC Important dimension
 - * Waterproof rate: IPX8, mated 1m/24h
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - $\triangle F \triangle G$ Nut: Metal
 - Shield: Metal
 - Outer mold: Thermoplastic, Black
 - $\triangle B$ * Cable: UL20549, Shield, PU Jacket, Black
 - * Cable length tolerance:

1M < L ≤ 3M:	+100/-0 mm
3M < L ≤ 5M:	+150/-0 mm
5M < L ≤ 10M:	±100 mm
10M < L ≤ 20M:	±200 mm
20M < L ≤ 30M:	±300 mm
30M < L ≤ 99M:	±500 mm

UNIT: mm

TOLERANCE

±0.5mm

TITLE			$\triangle H$
N SEN, M12 A -SHLD, SCREW CABLE W/O SR, M, M, MOLDING			
SCALE	SIZE	SHEET	
3:2	A4	1 OF 2	
REV.	WC-REV.	CC : Inspection item	
H	A.1		

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY	DATE
	Cynthia	2019/05/13
DWG NO.	CHECKED BY	DATE
$\triangle F$ MSAS-XXBMM-SL8BXX	Wen	2019/05/13
CUSTOMER	APPROVED BY	DATE
ALTW	Neo	2019/05/13

