REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201809	2020/11/20	Vicky	△B X3
C	C210237	2021/03/29	Ruru	△C X2

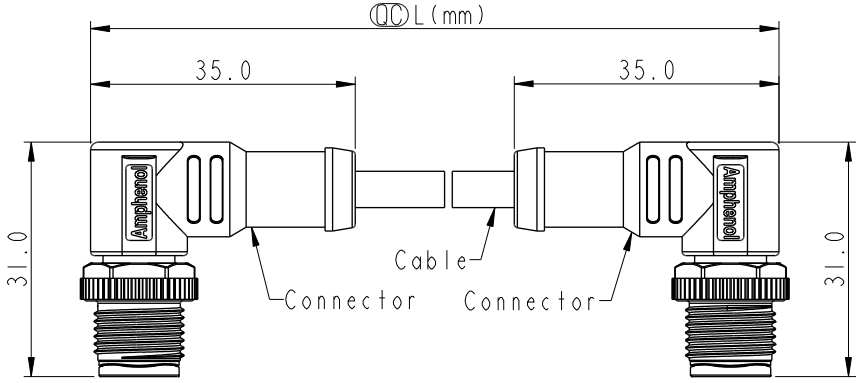

△B MSDPXXMR-SDPMR-SDXXX

XX: No. Of Pin

XXX: 0.5~99Meters
A05: 0.5 Meter
001: 1 Meter
002: 2 Meters
:
099: 99 Meters

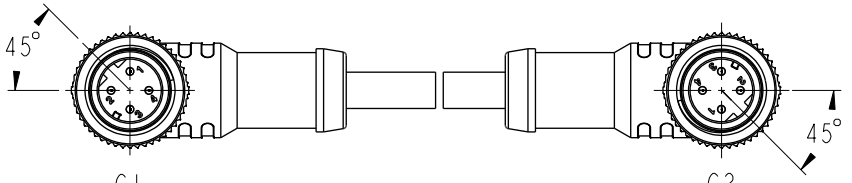

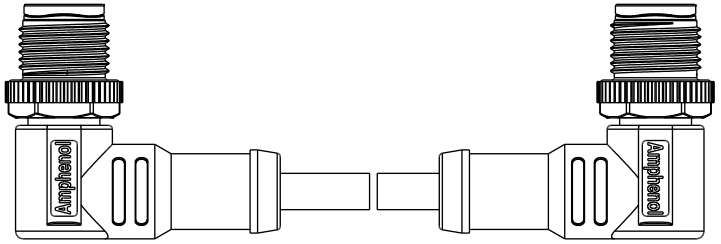

Note: △B △C
* RoHS Compliant
* QC Important dimension
* Waterproof rate: IPX8, mated 1m/24h
  IPX9K, mated
* Connector:
  Housing: Thermoplastic, Black
  Pin: Copper alloy, Gold plated
  Nut: Thermoplastic, Black
  Outer mold: Thermoplastic, Black
* Cable: UL2517, 22#4C, OD=4.8mm, PVC Jacket, Black
* Cable length tolerance: 0.5M < L ≦ 1M: +60/-0 mm
  1M < L ≦ 3M: +120/-0 mm
  3M < L ≦ 5M: +160/-0 mm
  5M < L ≦ 10M: ±100 mm
  10M < L ≦ 20M: ±200 mm
  20M < L ≦ 30M: ±300 mm
  30M < L ≦ 99M: ±500 mm

Pin Out		
	5	--
	4	Black 黑
	3	Blue 藍
	2	White 白
	1	Brown 棕
	Pin #	Wire

C1 & C2



4P

Pin Assignments Front View

UNIT: mm

TOLERANCE

±0.5 mm

TITLE: ACC, SEN, D Code, DB-ENDED MM △C

SCALE 1:1 | SIZE A4 | SHEET 1 OF 1

REV. C | WC-REV. A.5 | QC: Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY: Ruru	DATE: 2018-12-12
DWG NO: △B MSDPXXMR-SDPMR-SDXXX	CHECKED BY: Rita	DATE: 2018-12-12
CUSTOMER: ALTW	APPROVED BY: Max	DATE: 2018-12-12

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.