

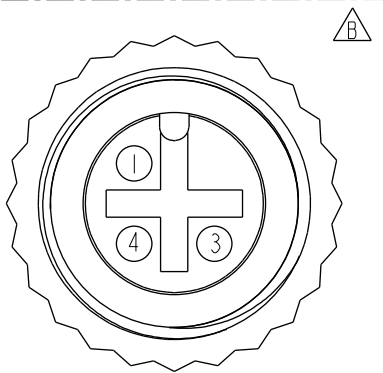


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-880086~089	2008/03/06	Gao Ling	Add Cross
C	LE314C0290~293	2014/12/08	Feng_Li	Change Pin Out
D	LEN1730037~040	2017/02/22	Ruru	Change Outer Mold Design



Conn. 1 & 2
Pin Assignments
Front View

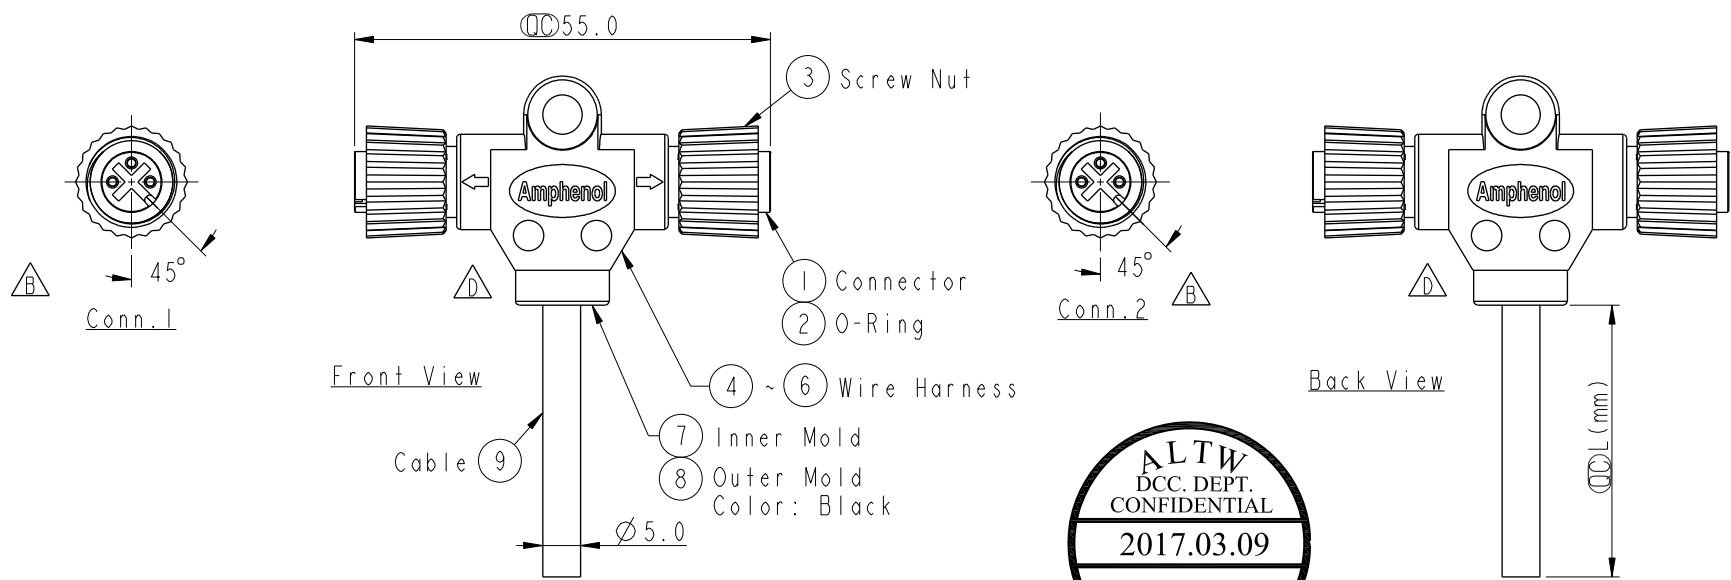

PS-030300-FF0-TSAXX

XX: 01~99Meters
 01: 01Meter
 02: 02Meters
 :
 :
 :
 99: 99Meters
 Cable Length(L): 01~99meters

- Note:
- * \varnothing Important Dimension.
 - * \triangle Waterproof Rate: IP68
一米水深, 24H
 - * Housing: Black, PU
 - * Female Pin: Copper Alloy, Gold Plated
 - * Wire Harness: UL1007, 24AWG, 3Pcs
 - * Cable: Black, UL2464 22AWG*3C+Talc
PVC Jacket(UV Resistant), OD=5.0mm
 - * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

4	Black	黑	4
3	Blue	藍	3
1	Brown	棕	1
Conn. 1	Wire Color		Conn. 2
Pin Out			

UNIT:mm
 TOLERANCE
 比例 3:1
 ±0.5mm

TITLE			
M12 Conn T Cable Screw FF Conn FF Pin			
SCALE	SIZE	SHEET OF	
I:1	A4	1 OF 1	
REV.	WC-REV.	\varnothing : Inspection item	
D	A.2		

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2017-02-22
DWG NO	CHECKED BY	DATE
PS-030300-FF0-TSAXX	Rita	2017-02-22
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2017-02-22