


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN13B0120~23	2013/08/07	Cary	Change Logo To Amphenol

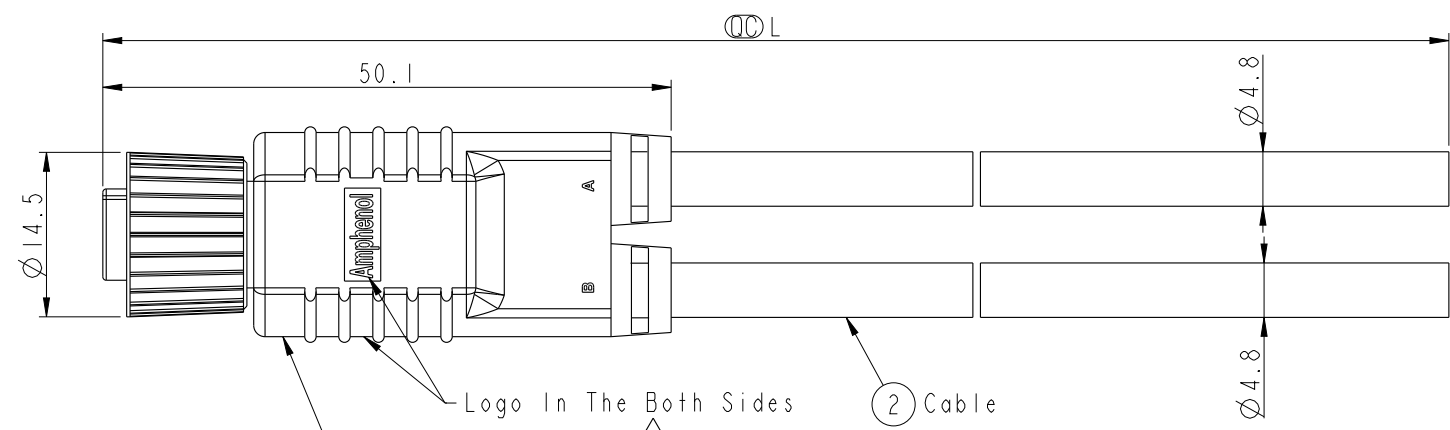

① SB-040000-F00-YS000
Color: Black


SB-040000-F00-YSBXX

XX:01~99Meter
01:01Meter
02:02Meters
:
99:99Meters

Cable Length(L):01~99Meters

Note:

- * Ⓞ Important Dimension.
- * ⚠ Waterproof Rate: IP68
IP68: 1M Depth Of Water In 24hours.
- * Housing: PU, Black
- * Female Pin: Copper Alloy, Gold Plated
- * O-Ring: Viton, Green
- * Screw Nut: Zn Alloy, Nicked Plated
- * Cable: NO HALOGEN 22AWG*4C+INSULATION
PU Jacket, UV Resistant, OD=4.8mm, Black
- * ⚠ Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm



Pin Assignments
Front View

4	Black	黑	Black	黑
3	Blue	藍	Blue	藍
2	White	白	White	白
1	Brown	棕	Brown	棕
		A		B
Conn.	Wire Color		Pin Out	

UNIT:mm
TOLERANCE
±0.5mm

TITLE M12 B 4Pin F Conn. F Pin,Y Cable			
SCALE 3:2	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. A.3	Ⓞ: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Cary_liu	DATE 2013-08-07
DWG NO SB-040000-F00-YSBXX	CHECKED BY Mafei	DATE 2013-08-07
CUSTOMER ALTW	APPROVED BY Maslow	DATE 2013-08-07