




| | | | | |
|------|----------------|------------|------|--|
| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
| B | LEN1720182~185 | 2017/02/10 | Ruru | Change Logo & Outer Mold Design & Note |


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

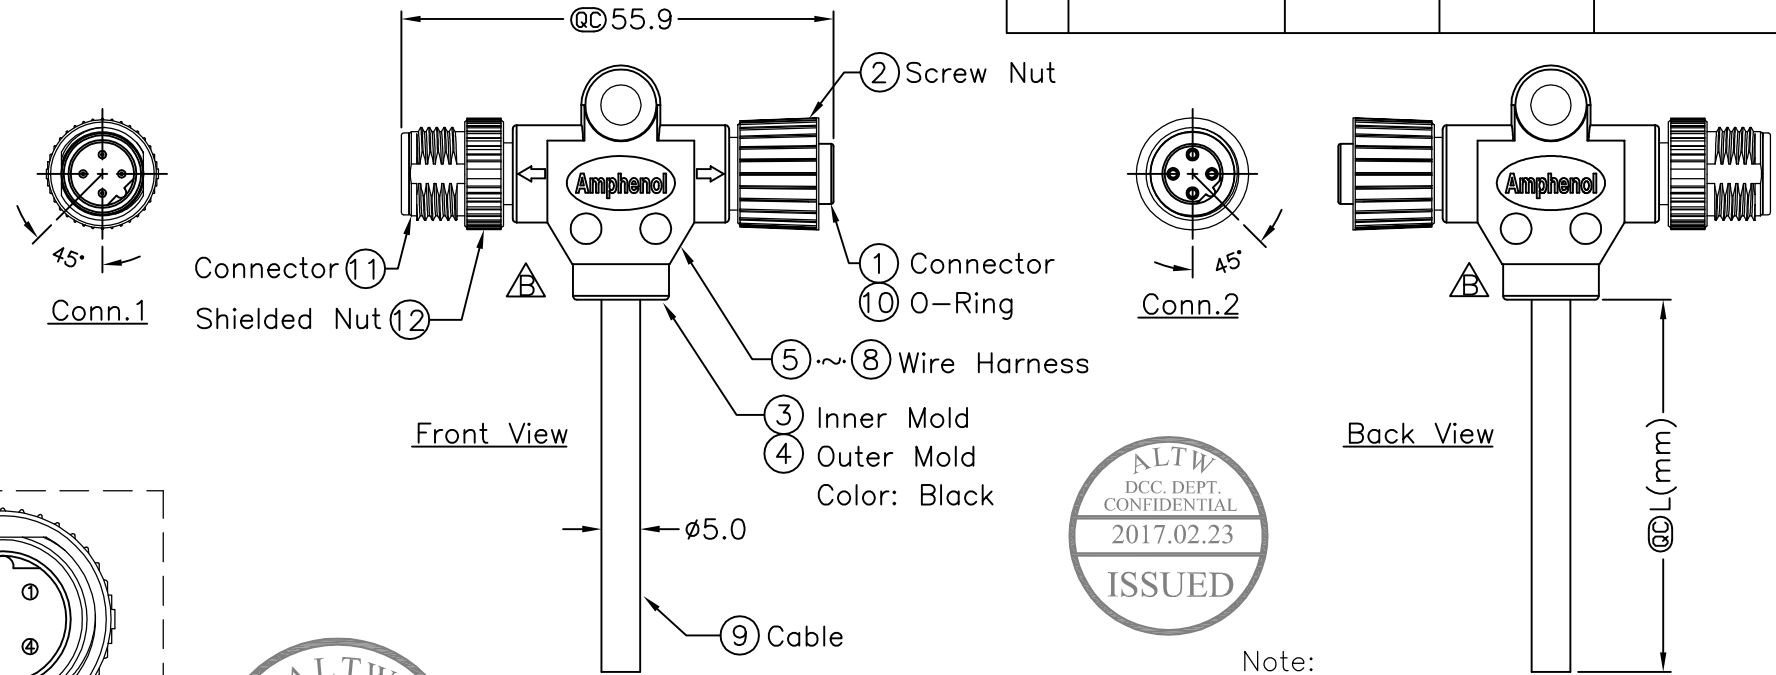

Conn.1
Pin Assignments
Front View



Conn.2
Pin Assignments
Front View



| | | | |
|--------|------------|---|--------|
| 4 | Black | 黑 | 4 |
| 3 | Blue | 藍 | 3 |
| 2 | White | 白 | 2 |
| 1 | Brown | 棕 | 1 |
| Conn.1 | Wire Color | | Conn.2 |

SB-040400-MF0-TSAXX

↑
XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters

Cable Length(L):01~99Meters

- Note:
- * QC Important Dimension.
 - * Waterproof Rate: IP68
 - * Housing: Black, Polyurethane
 - * Shielded Nut: Zinc Alloy, Nickel Plated
 - * Screw Nut: Zinc Alloy, Nickel Plated
 - * Male Pin: Copper Alloy, Gold Plated
 - * Female Pin: Copper Alloy, Gold Plated
 - * Wire Harness: UL1007 24AWG, 4Pcs
 - * Cable: UL2464 22AWG*4C+Talc
Black, PVC Jacket UV Resistant OD=5.0mm
 - * Cable Length Tolerance: A
 - 01M: $\pm 40\text{mm}$
 - 02M~05M: $\pm 60\text{mm}$
 - 06M~10M: $\pm 100\text{mm}$
 - 11M~30M: $\pm 200\text{mm}$
 - 31M~99M: $\pm 500\text{mm}$

| | |
|-----------|----------------------|
| UNIT:mm | |
| TOLERANCE | $\pm 0.5 \text{ mm}$ |

| | | | |
|------------------------------|------|-------------|------------------|
| TITLE | | M12B Conn | |
| T Cable Screw MF Conn MF Pin | | | |
| SCALE | Free | SHEET | 1 OF 1 |
| REV. | B | SIZE | A4 |
| | | QC | :Inspection Item |

Amphenol LTW
安費諾亮泰企業股份有限公司

| | |
|----------|---------------------|
| ITEM NO | |
| DWG NO | SB-040400-MF0-TSAXX |
| CUSTOMER | ALTW |

| | | | |
|-------------|------|------|------------|
| DRAWN BY | Ruru | DATE | 2017/02/10 |
| CHECKED BY | Rita | DATE | 2017/02/10 |
| APPROVED BY | Max | DATE | 2017/02/10 |