




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1720273~276	2017/02/14	Ruru	Change Logo & Outer Mold Design & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

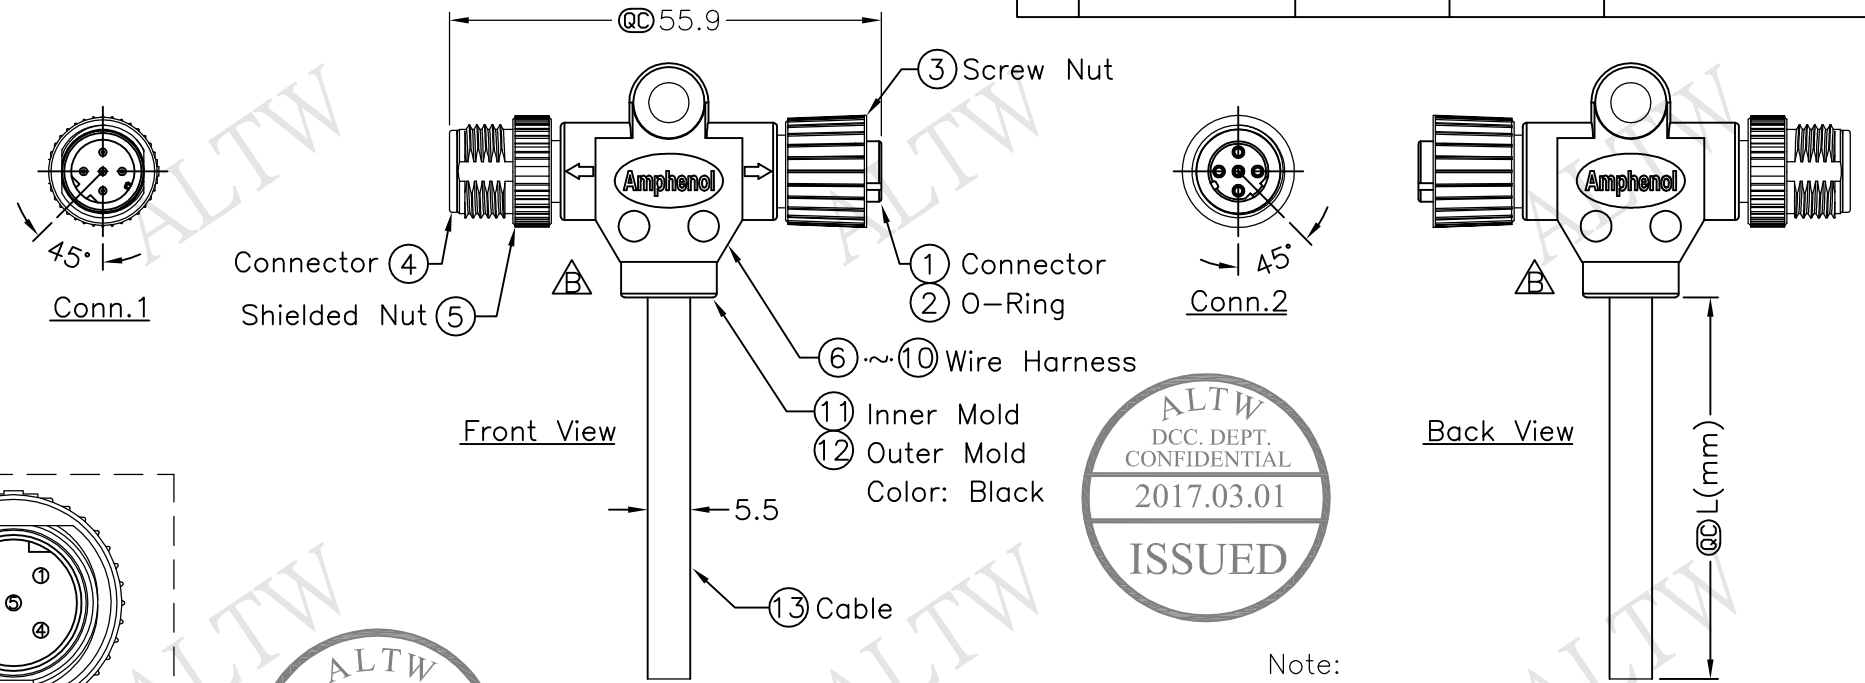

Conn.1
Pin Assignments
Front View



Conn.2
Pin Assignments
Front View



5	Green	綠	5
4	Black	黑	4
3	Blue	藍	3
2	White	白	2
1	Brown	棕	1
Conn.1	Wire Color		Conn.2
Pin Out			

SD-050500-MF0-TSAXX

XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters

Cable Length(L):01~99Meters

Note:

- * Ⓞ Important Dimension.
- * Waterproof Rate: IP68
- * Housing: Black, Polyurethane
- * Nut: Zinc Alloy, Nickel Plated
- * Male Pin: Copper Alloy, Gold Plated
- * Female Pin: Copper Alloy, Gold Plated
- * Wire Harness: UL1007 24AWG
- * Cable: Black, UL2464 22AWG*5C+Talc PVC Jacket UV Resistant OD=5.5mm
- * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT:mm	
TOLERANCE	
±0.5 mm	

TITLE	M12 Conn T Cable Screw MF Conn MF Pin		
SCALE	Free	SHEET	1 OF 1
REV.	B	SIZE	A4
Ⓞ :Inspection Item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	SD-050500-MF0-TSAXX
CUSTOMER	ALTW

DRAWN BY	Ruru
CHECKED BY	Rita
APPROVED BY	Max

DATE	2017/02/14
DATE	2017/02/14
DATE	2017/02/14