




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN13B0140~43	2013/08/09	Cary	Change Logo To Amphenol

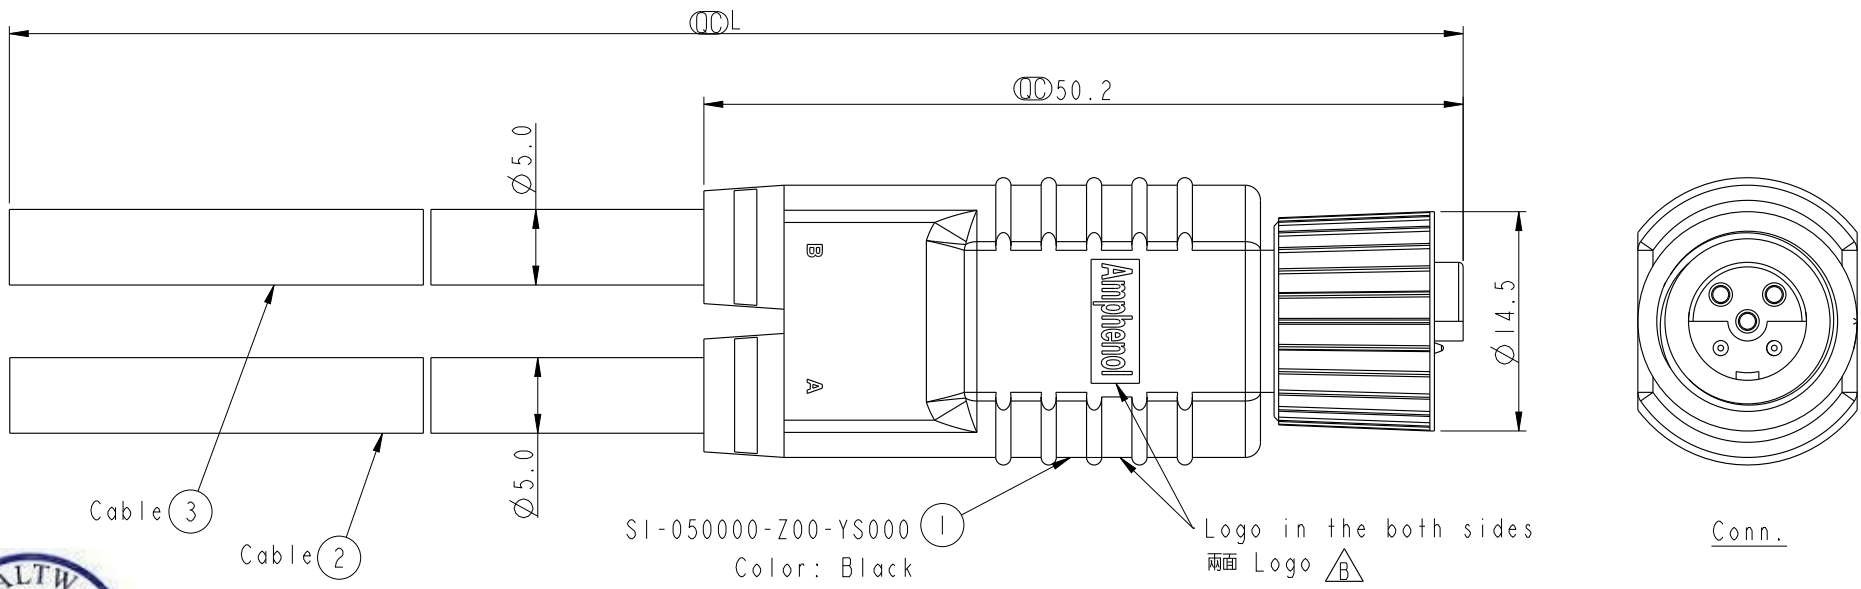

SI-050000-Z00-YSBXX
 XX:01~99Meters
 01:01Meter
 02:02Meters
 ...
 99:99Meters
 Cable Length(L):01~99Meters



Pin Assignments
Front View

5	Green	Green
4	White	White
3	Brown	Brown
2	Blue	Blue
1	Black	Black
	A	B
Conn.	Wire Color	
	Pin Out	

- Note:
- * (CCL) Important Dimension To Check.
 - * Waterproof Rate: IP68
IP68: 1M Depth Of Water In 24hours.
 - * Housing: PU, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Cable: Black, 22AWG*5C+TALCUM
OD=5.0mm
 - * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT:mm
 TOLERANCE
 ±0.5mm

TITLE M12 I Style Cable Screw 5Pin F Conn. C Pin			
SCALE 2:1	SIZE A4	SHEET 1 OF 1	
REV. B	WC-REV. A.2	(CCL): Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Cary_liu	DATE 2013-08-09
DWG NO. SI-050000-Z00-YSBXX	CHECKED BY Mafei	DATE 2013-08-09
CUSTOMER ALTW	APPROVED BY Victor	DATE 2013-08-09