



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1520132~135	2015/01/29	Sam	Update Logo & View & Note
C	LEN1720333~336	2017/02/15	Ruru	Change Outer Mold Design

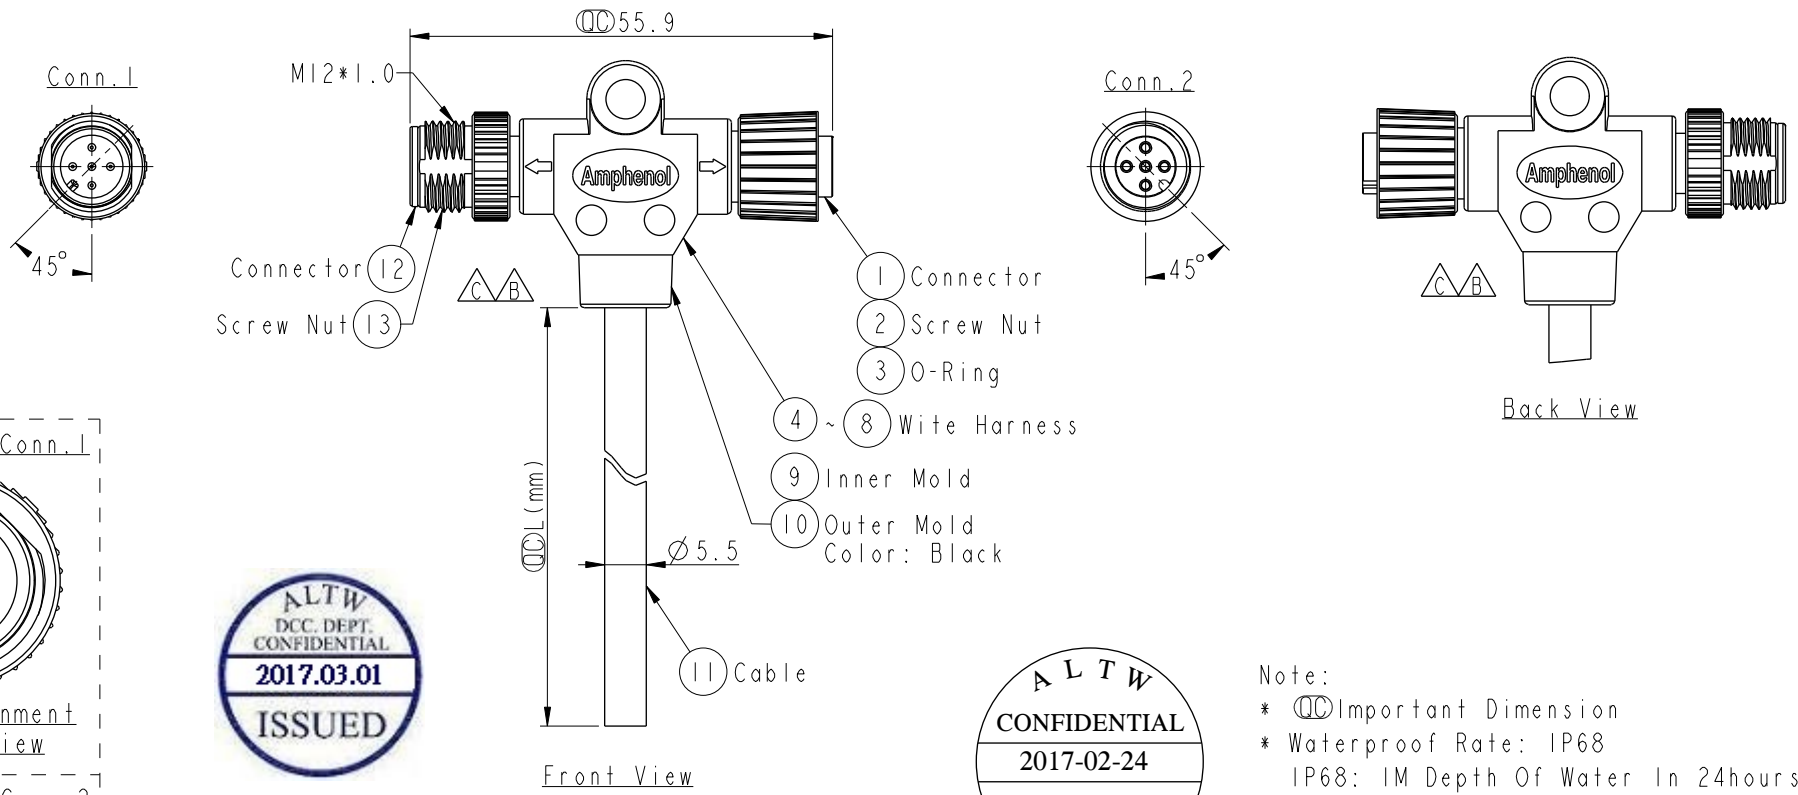


Note:


- * \varnothing Important Dimension
- * Waterproof Rate: IP68
IP68: 1M Depth Of Water In 24hours
- * Housing: PU, Black
- * Pin: Copper Alloy, Gold Plated
- * Wire Harness: UL1007 24AWG, 5Pcs
- * Cable: UL2464 22AWG*5C+Talc, Black, PVC Jacket, UV Resistant, OD=5.5mm
- * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

SS-050500-MF0-TSAXX

XX: 01~99Meter
01: 01Meter
02: 02Meter
...
99: 99Meter
Cable Length(L): 01~99Meters



Pin Assignment Front View



Pin Assignment Front View

5	Green	綠	5
4	Black	黑	4
3	Blue	藍	3
2	White	白	2
1	Brown	棕	1
Conn.1	Wire Color		Conn.2

Pin Out

UNIT:mm		TITLE	M12P Conn T Cable Screw MF Conn MF Pin	
TOLERANCE	±0.5 mm	SCALE	1:1	SIZE A4
		REV.	C	WC-REV. A.1
			\varnothing : Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	SS-050500-MF0-TSAXX	DRAWN BY	Ruru	DATE	2017-02-15
DWG NO	SS-050500-MF0-TSAXX	CHECKED BY	Rita	DATE	2017-02-15
CUSTOMER	ALTW	APPROVED BY	Max	DATE	2017-02-15

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.