



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE3-9A0070~73	2009/10/13	Li Xiu Zhi	Change Screw Nut
C	LEN13B0223~26	2013/09/14	Cary	Change Logo From LTW To Amphenol

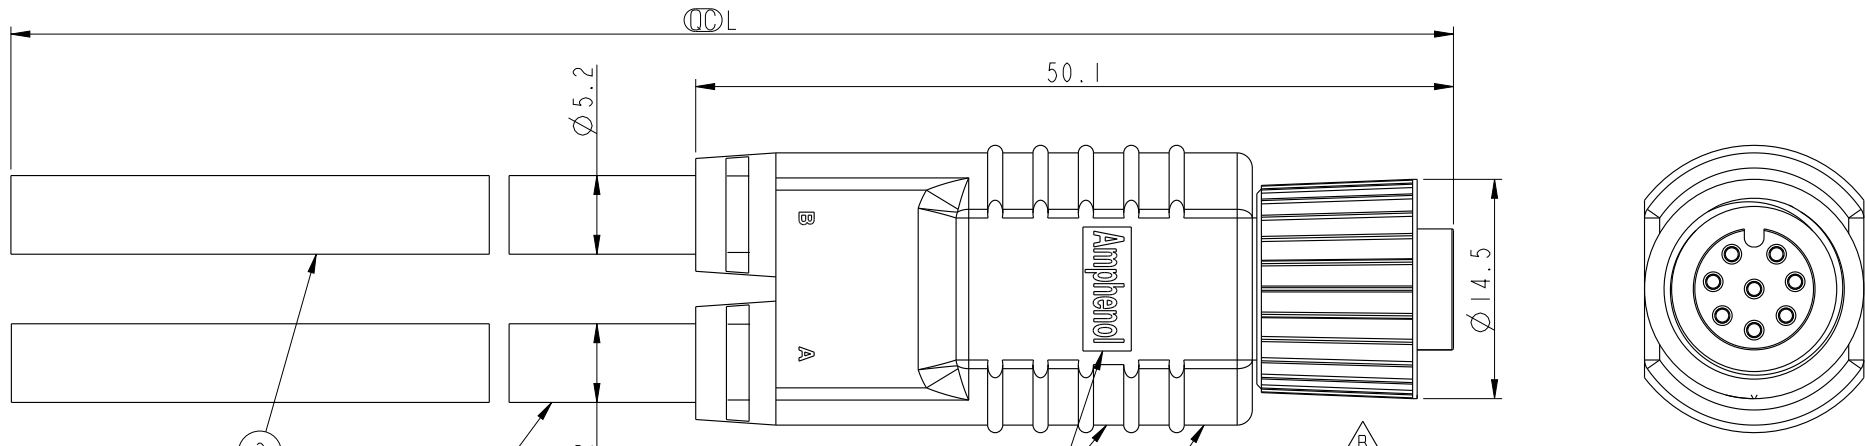


Conn.

SS-080000-F00-YS000
Color:Black

SS-080000-F00-YSBXX
XX:01~99Meters
01:01Meter
02:02Meters
:
99:99Meters
Cable Length(L):01~99Meters

- Note:
- * \varnothing Important Dimension To Check.
 - * Waterproof Rate: IP68.
IP68: 1M Depth Of Water In 24hours.
 - * Housing: PU, Black.
 - * Female Pin: Copper Alloy, Gold Plated.
 - * O-Ring: Viton, Green
 - * Screw Nut: ZN-ZDC-3, Nicked Plated
 - * Cable: 24AWG*8C+P PU Jacket VW-1
Black ,OD=5.2
 - * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm



Pin Assignments
Front View

8	Red	紅	Red	紅
7	Blue	藍	Blue	藍
6	Pink	粉	Pink	粉
5	Grey	灰	Grey	灰
4	Yellow	黃	Yellow	黃
3	Green	綠	Green	綠
2	Brown	棕	Brown	棕
1	White	白	White	白
Conn.	A	B		
	Wire Color			
	Pin Out			

UNIT:mm
TOLERANCE
±0.5mm

TITLE
M12 Series Sensor Conn.
8Pin Female Conn. Female Pin

SCALE 2:1 SIZE A4 SHEET 1 OF 1

REV. C WC-REV. A.1 \varnothing : Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Cary_liu	2013/09/14
DWG NO	CHECKED BY	DATE
SS-080000-F00-YSBXX	Mafei	2013/09/14
CUSTOMER	APPROVED BY	DATE
ALTW	Victor	2013/09/14

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.