




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1520136~139	2015/01/29	Sam	Update Logo & View & Note
C	LEN1720337~340	2017/02/15	Ruru	Change Outer Mold Design

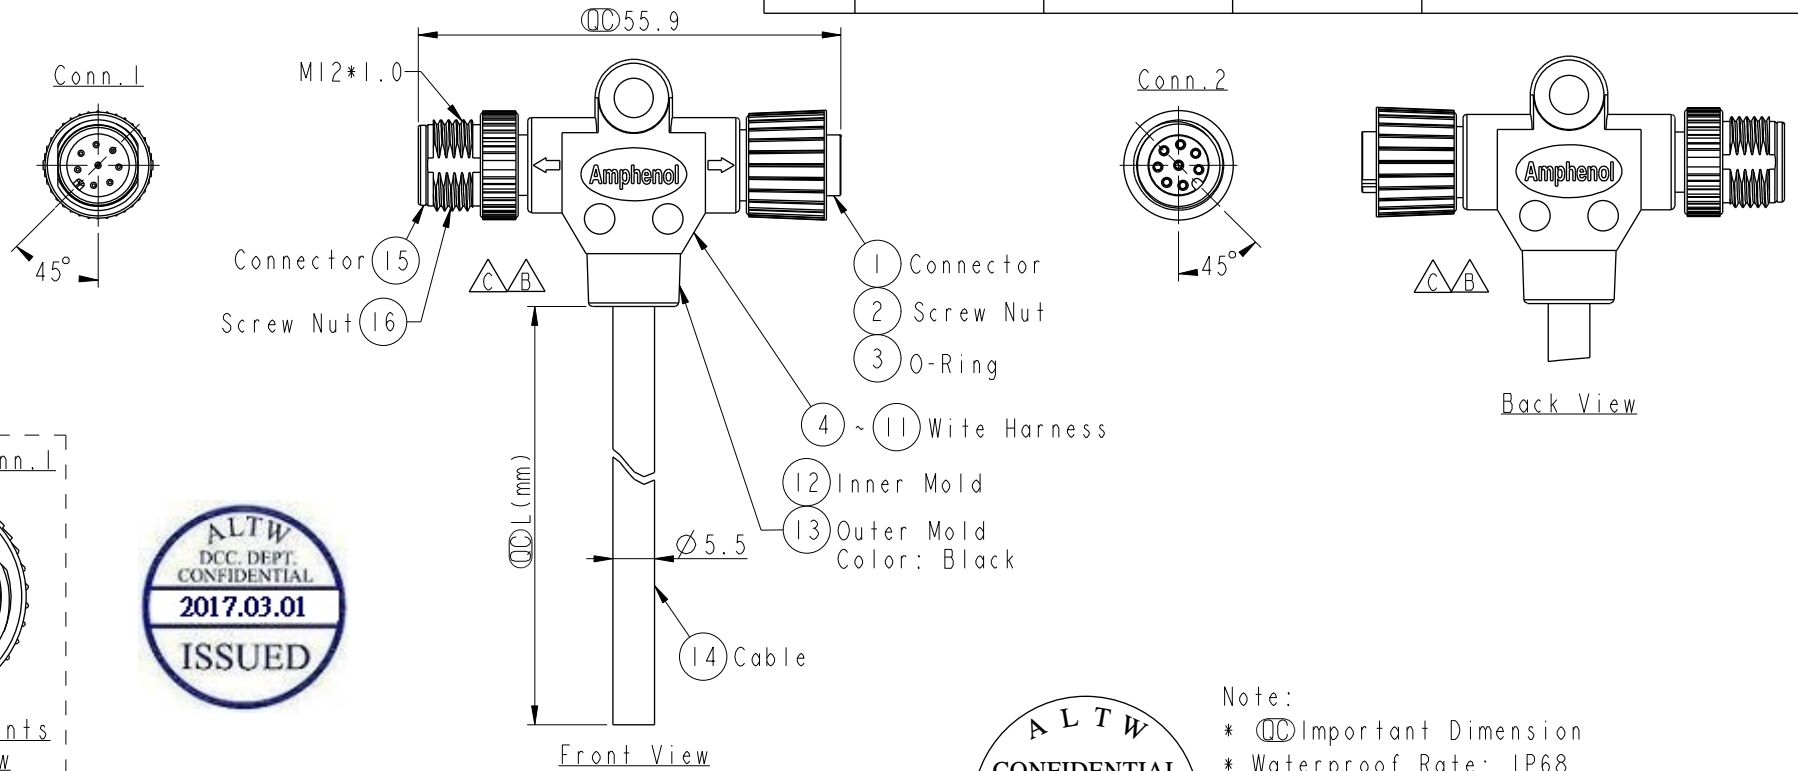

Note:

- * \varnothing Important Dimension
- * Waterproof Rate: IP68
IP68: 1M Depth Of Water In 24hours
- * Housing: PU, Black
- * Pin: Copper Alloy, Gold Plated
- * Wire Harness: UL1007 24AWG, 8Pcs
- * Cable: UL2464 22AWG*8C+Talc, Black, PVC Jacket, UV Resistant, OD=5.5mm
- * Cable Length Tolerance: \triangle
 - 01M: ± 40 mm
 - 02M~05M: ± 60 mm
 - 06M~10M: ± 100 mm
 - 11M~30M: ± 200 mm
 - 31M~99M: ± 500 mm

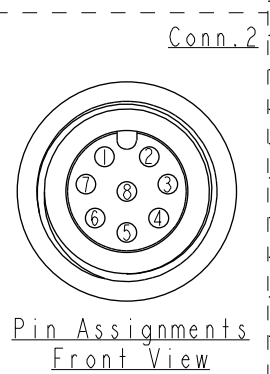

8	Gray	灰	8
7	Purple	紫	7
6	Blue	藍	6
5	Green	綠	5
4	Yellow	黃	4
3	Orange	橙	3
2	Red	紅	2
1	Brown	棕	1
Conn.1	Wire Color		Conn.2

Pin Out

SS-080800-MF0-TSAXX

XX: 01~99Meter
01: 01Meter
02: 02Meter
:
:
:
99: 99Meter

Cable Length(L): 01~99Meters

UNIT:mm		TITLE	M12P Conn T Cable Screw MF Conn MF Pin	
TOLERANCE	± 0.5 mm	SCALE	1:1	SIZE A4
		REV.	C	WC-REV. A.1
			\varnothing	Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	SS-080800-MF0-TSAXX	DWG NO	SS-080800-MF0-TSAXX	DRAWN BY	Ruru	DATE	2017-02-15
CUSTOMER	ALTW	CHECKED BY	Rita	DATE	2017-02-15	APPROVED BY	Max
				DATE	2017-02-15		