


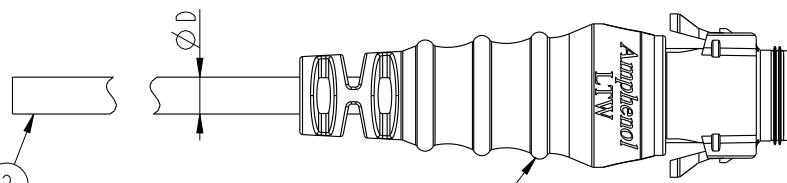
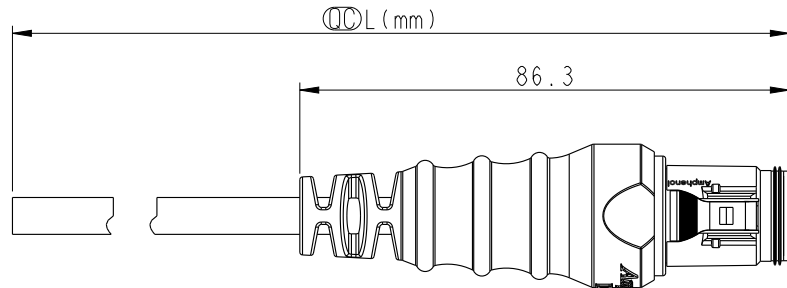
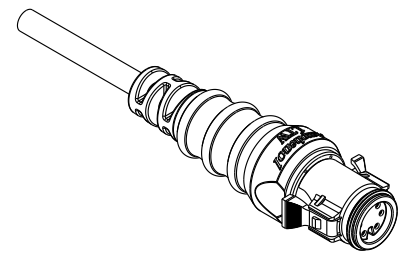
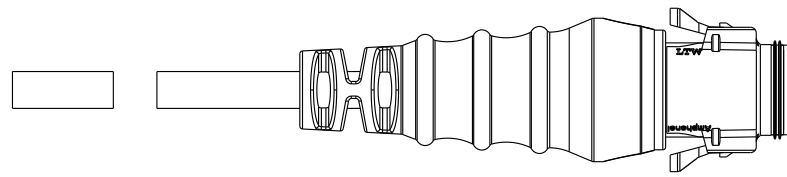


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE31570316~17	2015/07/19	Lu Di	Change To Common drawing
C	LEN15B0386~390	2015/11/10	Joyy	Add 7-8 And 9 Pin To The Common Drawing



Conn



Cable ②

CD-XXAMFM-RL7000 ①
Color:Black

- Note:
- * ① Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: M-PPE, Black.
 - * Female Pin: Copper Alloy, Gold Plated.
 - * Gasket: Silicone, Gray.
 - * Cable: UL2464 20#, PVC Jacket ,UV Resistant, Black.
 - * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm
 - * Prohibiting the use of place in oils




CD-02AMFM-RL7AXX	
CD-03AMFM-RL7AXX	∅ 5.5
CD-04AMFM-RL7AXX	
CD-05AMFM-RL7AXX	∅ 6.0
CD-06AMFM-RL7AXX	∅ 6.5
CD-07AMFM-RL7AXX	
CD-08AMFM-RL7AXX	∅ 6.8
CD-09AMFM-RL7AXX	∅ 7.4
Part No.	Cable OD

UNIT:mm	TOLERANCE	TITLE
∅	±0.5	MIDDLE CABLE RBL M CONN F PIN
SCALE	3:4	SIZE A4
REV.	C	SHEET 1 OF 2
WC-REV.	A.3	①: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Joyy	2015-11-10
DWG NO	CHECKED BY	DATE
CD-XXAMFM-RL7AXX	Lu Di	2015-11-10
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2015-11-10




CD-XXAMFM-RL7A XX

Middle Size Current Rating 5A
 XX: No. Of Pin (Pin 數)
 A: Cable With S/R (線端帶網尾)
 M: Male Connector (公座)
 F: Female Pin (母Pin)
 M: Molding Type (射出成型)


XX: 01~99 Meter
 01: 01 Meter
 02: 02 Meter
 :
 :
 99: 99 Meter

A: UL 2464 Cable
 7: IP67 (防水等級 67)
 L: Straight (180°)
 R: Snap In With Latch (彈臂卡合式)

9	White	白	9	--	
8	Purple	紫	8	Purple	紫
7	Red	紅	7	Red	紅
6	Green	綠	6	Green	綠
5	Yellow	黃	5	Yellow	黃
4	Blue	藍	4	Blue	藍
3	Orange	橘	3	Orange	橘
2	Brown	棕	2	Brown	棕
1	Black	黑	1	Black	黑



9Pin



8Pin

Pin Out	4	--	4	Blue	藍	4	Blue	藍	6	Green	綠	6	Grey	灰	9	--	
	3	White	3	White	白	3	White	白	5	--		5	Yellow	黃	8	--	
	2	--	2	--		2	Brown	棕	4	Black	黑	4	Green	綠	7	Red	紅
	1	Black	1	Black	黑	1	Black	黑	3	Blue	藍	3	White	白	6	Green	綠
									2	White	白	2	Blue	藍	5	Yellow	黃
									1	Brown	棕	1	Brown	棕	4	Blue	藍
															3	Orange	橘
															2	Brown	棕
															1	Black	黑

Pin Assignments Front View						
	2Pin	3Pin	4Pin	5Pin	6Pin	7Pin

UNIT: mm TOLERANCE ±0.5	TITLE MIDDLE CABLE RBL M CONN F PIN		<h1>Amphenol LTW</h1> <p>安費諾亮泰企業股份有限公司</p>		ITEM NO	DRAWN BY Joyy	DATE 2015-11-10	
	SCALE 3:4	SIZE A4			SHEET 2 OF 2	DWG NO CD-XXAMFM-RL7AXX	CHECKED BY Lu Di	DATE 2015-11-10
	REV. C	WC-REV. A.3			QC: Inspection item	CUSTOMER ALTW	APPROVED BY Jerry	DATE 2015-11-10