

REV.	ECN NO.	DATE	SIGN	DESCRIPTION

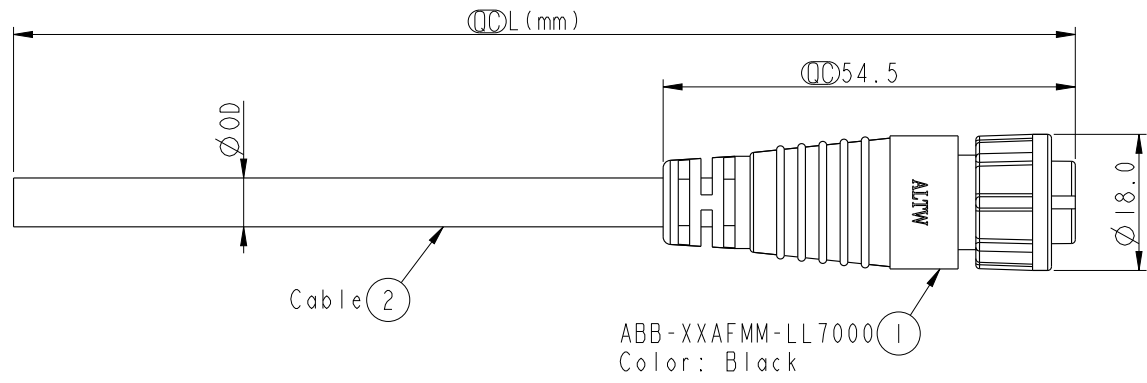



ABB-XXAFMM-LL7AXX

02: 2Pin
 ...
 03: 3Pin

XX : 01~99Meters
 01 : 01Meter
 02 : 02Meters
 ...
 99 : 99Meters

Cable Length(L): 01~99Meters

3 Yellow 黃	2 Red 紅
2 White 白	1 Green 綠
1 Black 黑	
Pin # Wire	Pin # Wire

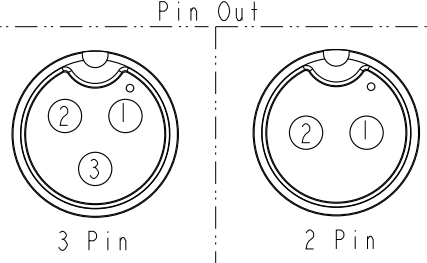

3P	PVC	5.0	20	ABB-03AFMM-LL7AXX
2P		5.8		ABB-02AFMM-LL7AXX
Contacts	Cable Jacket	Cable OD	AWG	Item No.

Note:

- * \varnothing Important Dimension To Check.
- * Waterproof Rate: IP67
- * Housing: Nylon+GF, Black.
- * Male Pin: Copper Alloy, Gold Plated.
- * Cable: UL2464 20AWG+D+AL/My PVC Jacket UV Resistant, Black.
- * Cable Length Tolerance: 01M: 40mm
 02M~05M: ±60mm
 06M~10M: ±100mm
 11M~30M: ±200mm
 31M~99M: ±500mm

UNIT: mm

TOLERANCE ±0.5

TITLE STANDARD CABLE LOCK F CONN M PIN			
SCALE 1:2	SIZE A4	SHEET 1 OF 1	
REV. A	WC-REV. A.1	\varnothing : Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Mafei	DATE 2017-06-24
DWG NO. ABB-XXAFMM-LL7AXX	CHECKED BY Jerry	DATE 2017-06-24
CUSTOMER ALTW	APPROVED BY Max	DATE 2017-06-24

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.